

# Technical data sheet



## Product features

### Hood type dishwasher single skin 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011268
--------------	-----------------	----------



- Display type: 3 local display + diode bar
- Number of programs: 5
- Number of skin: 1
- Door clear height [mm]: 450
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,1
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

<b>SAP Code</b>	00011268	<b>Boiler power [kW]</b>	8.000
<b>Net Width [mm]</b>	634	<b>Basin volume [l]</b>	15
<b>Net Depth [mm]</b>	744	<b>Tank power [kW]</b>	2.100
<b>Net Height [mm]</b>	1530	<b>Water consumption of the washing cycle [l/basket]</b>	2,1
<b>Net Weight [kg]</b>	90.00	<b>Washing cycle time [s/basket]</b>	60-120-150
<b>Power electric [kW]</b>	8.500	<b>Door clear height [mm]</b>	450
<b>Loading</b>	400 V / 3N - 50 Hz	<b>Rack size [mm]</b>	500 x 500
<b>Boiler capacity [ l ]</b>	6.00	<b>Noise of device</b>	60,4

# Technical data sheet




Technical drawing

## Hood type dishwasher single skin 50x50 - 400 V

Model

SAP Code

00011268

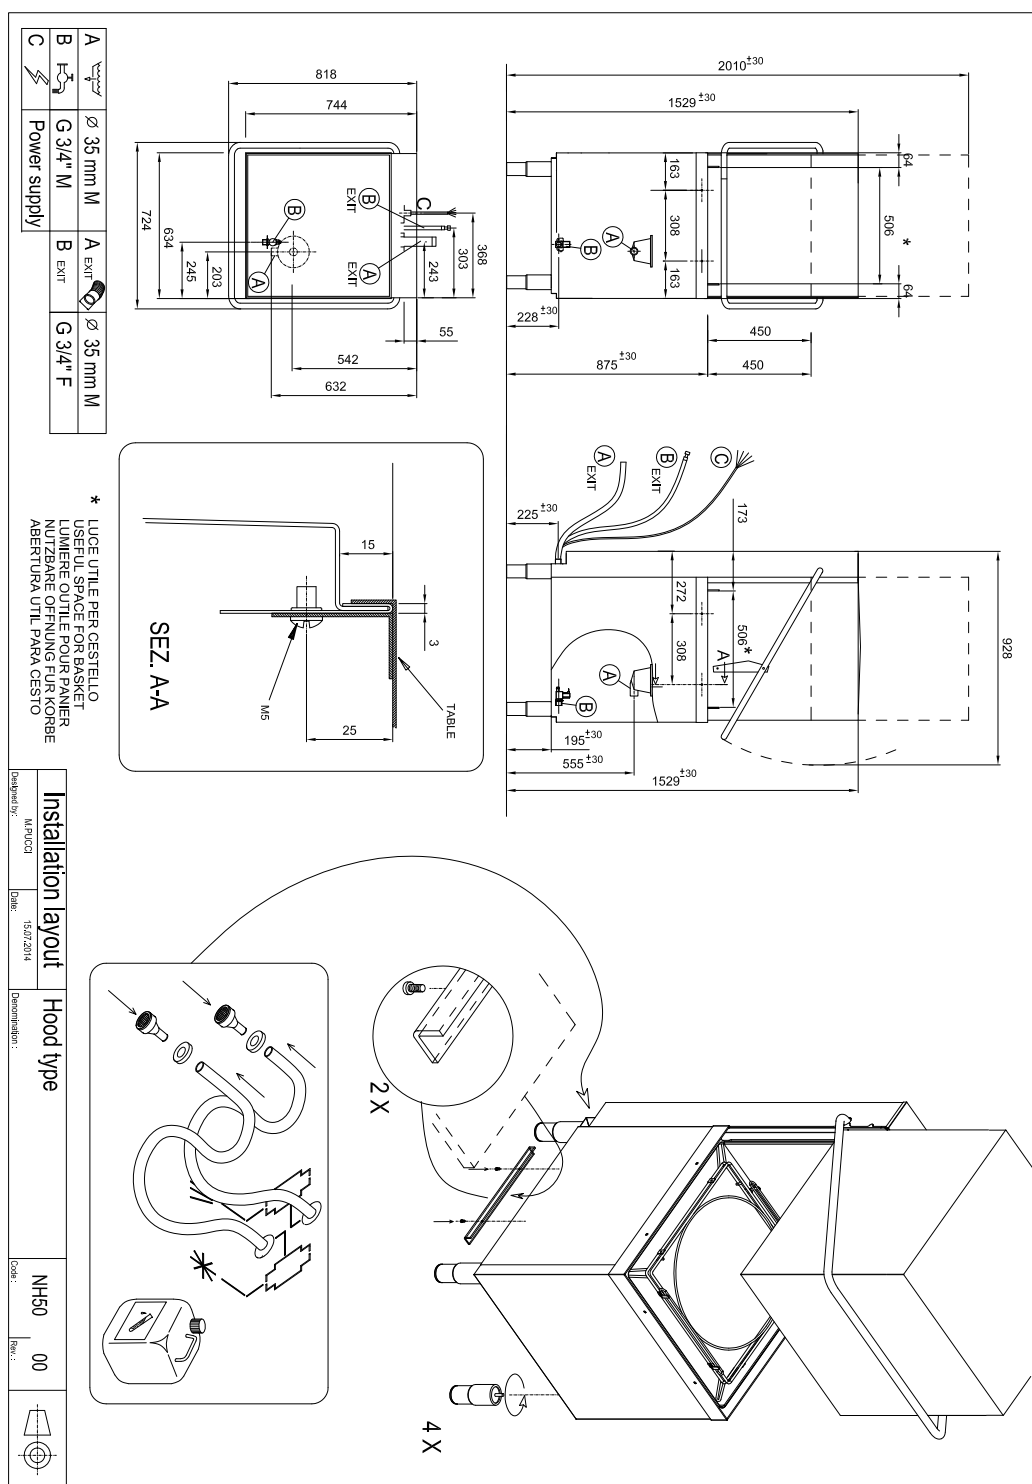

# Technical data sheet



## Product benefits

### Hood type dishwasher single skin 50x50 - 400 V

Model

SAP Code

00011268

1

#### Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

- easy cleaning, high hygiene standard, long service life

2

#### Washing arms with a component, common for washing and rinsing

washing arms made of composite material  
common arm for washing and rinsing  
integrated screw secured against falling out

- easy and safe handling during cleaning; higher user comfort

3

#### LED Display

three-line display  
diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

#### Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

#### Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

6

#### Detergent dispensers

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

#### Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

8

#### Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving

# Technical data sheet



## Technical parameters

### Hood type dishwasher single skin 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011268
--------------	-----------------	----------

**1. SAP Code:**

00011268

**15. Number of programs:**

5

**2. Net Width [mm]:**

634

**16. Opening of device:**

Flip up

**3. Net Depth [mm]:**

744

**17. Door clear height [mm]:**

450

**4. Net Height [mm]:**

1530

**18. Inlet pressure [bar]:**

2-4

**5. Net Weight [kg]:**

90.00

**19. Adjustable feet:**

Yes

**6. Gross Width [mm]:**

774

**20. Number of skin:**

1

**7. Gross depth [mm]:**

868

**21. Boiler capacity [ l ]:**

6.00

**8. Gross Height [mm]:**

1579

**22. Boiler power [kW]:**

8.000

**9. Gross Weight [kg]:**

100.00

**23. Basin volume [l]:**

15

**10. Device type:**

Electric unit

**24. Tank power [kW]:**

2.100

**11. Control type:**

Digital

**25. Number of arms for both rinsing and washing:**

2

**12. Material:**

AISI 304

**26. Arm connection:**

Hand loosen/tighten screw

**13. Power electric [kW]:**

8.500

**27. Washing arm type:**

Rotatable two-pronged

**14. Loading:**

400 V / 3N - 50 Hz

**28. Washing arm material:**

Composite

# Technical data sheet



## Technical parameters

### Hood type dishwasher single skin 50x50 - 400 V

Model

SAP Code

00011268

**29. Rinsing arm type:**

Rotating two-pronged

**30. Rinsing arm material:**

Composite

**31. Deep drawn tank:**

Yes

**32. Tank surface strainers:**

composite

**33. Drain filter:**

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

**34. Thermostop:**

Yes

**35. Boiler thermostat adjust:**

Yes

**36. Rack feed capacity:**

24-30-60

**37. Detergent and rinse pump system:**

ProDose - accurate dosing with a peristaltic pump

**38. Energy Saving system:**

EnergySaving - Energy saving system due to lowering the boiler temperature

**39. Hot water electric valve:**

Yes

**40. Rack size [mm]:**

500 x 500

**41. Display type:**

3 local display + diode bar

**42. Location of control panel:**

Down

**43. USB port:**

Yes, for Firmware actualisation

**44. Self-diagnostics:**

Yes

**45. Wash pump type:**

two-way - DuoFlow

**46. Detergent dispenser:**

Yes

**47. Rinse aid dispenser:**

Yes

**48. Water consumption of the washing cycle [l/basket]:**

2,1

**49. Washing cycle time [s/basket]:**

60-120-150

**50. Rinse water temperature [°C]:**

80

**51. Standard equipment for device:**

1x glass basket, 1x plate basket, 1x cutlery basket

**52. Program ProSpeed:**

Yes

**53. Program ProFessional:**

Yes

**54. Program ProTemp:**

Yes

# Technical data sheet



Technical parameters

Hood type dishwasher single skin 50x50 - 400 V

Model

SAP Code

00011268

**55. Program ProSelf:**

Yes

**57. Noise of device:**

60,4

**56. Program ProLong:**

Yes