

Product features

Combi convection steam oven MINI electric 10x GN 1/1 automatic cleaning direct steam touch screen 5´´ 400 V		
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines




- Steam type: InjectionNumber of GN / EN: 10
- GN / EN size in device: GN 1/1
- GN device depth: 40
- Control type: Touchscreen + buttons
- Display size: 5"
- Humidity control: MeteoSystem regulation based on direct measurement of humidity in the chamber (patented)
- Advanced moisture adjustment: No
- Delta T heat preparation: Yes
- Automatic preheating: Yes
- Multi level cooking: Drawer program control of heat treatment for each dish separately
- Door constitution: Vented safety double glass, removable for easy cleaning

SAP Code	00011861	Steam type	Injection
Net Width [mm]	519	Number of GN / EN	10
Net Depth [mm]	808	GN / EN size in device	GN 1/1
Net Height [mm]	770	GN device depth	40
Net Weight [kg]	96.00	Control type	Touchscreen + buttons
Power electric [kW]	13.800	Display size	5"
Loading	400 V / 3N - 50 Hz		



Technical drawing

Combi convection steam oven MINI electric 10x GN 1/1 automatic cleaning direct steam touch screen 5´´ 400 V		
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines

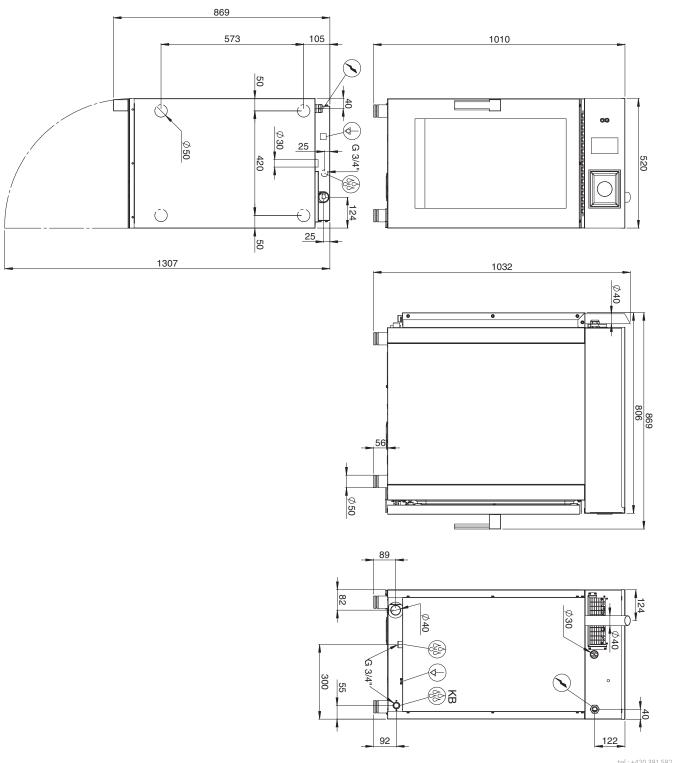



Product benefits

Combi	convection steam oven MI	NI electric 10x GN 1/1 aut	omatic clo	eaning direct steam touch screen 5´´ 400 V
Model		SAP Code	000118	61
MSDI	MSDBD 1011 E A group of articles - web		Convection machines	
1	Double loading insert, lo inserts formed from rigid stair insertion of GN, double insert inserting divided GN	nless steel wire allowing	8	Automatic washing integrated chamber washing system the possibility of using liquid and tablet detergents option to use vinegar as a rinse aid the system also descales the micro boiler
2	Narrow body economical construction with a panel placed on top of full-size GN 1/1 inserts		9	Six-speed fan, reversible with automatic calculation of direction change in cooperation with the symbiotic system, it ensures perfect distribution of steam without losing its saturation
3	A symbiotic steam general simultaneous use of direct injumaintenance of 100% humidi	ection and boiler,	10	its operation is controlled by the program or manually External temperature probe
4	Touch screen display. simple intuitive control with unique pictograms everything in Czech the possibility of using preset programs or manual control		10 11	temperature probe located outside the cooking area choice of single or multipoint probe or vacuum probe Longitudinal insertion to GN penetration placed on the depth of the machine
5	Weather system patented device for measuring steam saturation in real time and in steam mode, the only one on the market		12	exchangeable for 600x400 sheet metal inserts USB downloading service reports software upgrade
6	Steam tuner a control element that allows saturation of steam in the coo cooking process		13	recipe playback Temperature range 30°C - 300°C heating the chamber in the temperature range of 30 to 300 °C
7	A kit of two machines on connection kit allowing two metop of each other connects the connections, inlustrated of the lower combi oven	nachines to be placed on	14	Stainless steel construction construction material is high quality stainless steel ensuring long life high hygiene standard

high hygiene standard



Technical parameters

Combi convection steam oven MI	NI electric 10x GN 1/1	Lautomatic cleaning direct steam touch screen 5´´ 400 V	
Model	SAP Code	00011861	
MSDBD 1011 E	A group of articles - web	Convection machines	
1. SAP Code: 00011861		14. Exterior color of the device: Stainless steel	
2. Net Width [mm]: 519		15. Adjustable feet: Yes	
3. Net Depth [mm]: 808		16. Humidity control: MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented)	
4. Net Height [mm]:		17. Stacking availability: Yes	
5. Net Weight [kg]: 96.00		18. Control type: Touchscreen + buttons	
6. Gross Width [mm]: 580		19. Additional information: possibility of reverse door opening - handle on the right side (must be specified when ordering)	
7. Gross depth [mm]: 920		20. Steam type: Injection	
8. Gross Height [mm]: 980		21. Sturdier version: No	
9. Gross Weight [kg]: 106.00		22. Chimney for moisture extraction: Yes	
10. Device type: Electric unit		23. Delayed start:	
11. Power electric [kW]: 13.800		24. Display size: 5"	
12. Loading: 400 V / 3N - 50 Hz		25. Delta T heat preparation: Yes	
13. Material: AISI 304		26. Automatic preheating: Yes	



Technical parameters

Combi convection steam oven M	NI electric 10x GN 1/1 -	Lautomatic cleaning direct steam touch screen 5´´400 V
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines
27. Automatic cooling: Yes		41. Probe: Optional
28. Unified finishing of meals Easy Yes	Service:	42. Remote control: No
29. Night cooking: Yes		43. Shower: Manual (optional)
30. Washing system: Open		44. Distance between the layers [mm]: 30
31. Detergent type: Liquid washing detergent + water	rinse	45. Smoke-dry function: Yes
32. Multi level cooking: Drawer program - control of heat to dish separately	reatment for each	46. Interior lighting: Yes
33. Advanced moisture adjustment:		47. Low temperature heat treatment: Yes
34. Slow cooking: from 50 °C		48. Number of fans: 2
35. Fan stop: Interruption when door is opened, not braked		49. Number of fan speeds:
36. Lighting type: LED lighting in the door, on one side		50. Number of programs:
37. Cavity material and shape: AISI 304, with rounded corners for easy cleaning		51. USB port: Yes, for uploading recipes and updating firmware
38. Reversible fan: Yes		52. Door constitution: Vented safety double glass, removable for easy cleaning
39. Sustaince box: Yes		53. Number of preset programs: 100
40. Heating element material:		54. Number of recipe steps:

Incoloy



Technical parameters

Combi convection steam oven MINI electric 10x GN 1/1 automatic cleaning direct steam touch screen 5´´ 400 V			
Model SAP Code		00011861	
MSDBD 1011 E	A group of articles - web	Convection machines	
55. Minimum device temperature [°C]: 50		61. GN device depth: 40	
56. Maximum device temperature [°C]: 300		62. Food regeneration: Yes	
57. Device heating type: Combination of steam and hot air		63. Cross-section of conductors CU [mm ²]:	
58. HACCP: Yes		64. Diameter nominal: DN 50	
59. Number of GN / EN:		65. Water supply connection: 3/4"	

60. GN / EN size in device:

GN 1/1