

# Technical data sheet

## Product features



### Bain Marie 4 containers dry

| Model | SAP Code | 00015058 |
|-------|----------|----------|
|-------|----------|----------|



- Basin volume [l]: 4,5
- Drain: No
- Material: Stainless steel
- Protection of controls: IPX4
- Maximum device temperature [°C]: 90
- Device properties: Warmed

|                        |          |                            |                    |
|------------------------|----------|----------------------------|--------------------|
| <b>SAP Code</b>        | 00015058 | <b>Net Weight [kg]</b>     | 16.00              |
| <b>Net Width [mm]</b>  | 450      | <b>Power electric [kW]</b> | 0.800              |
| <b>Net Depth [mm]</b>  | 600      | <b>Loading</b>             | 230 V / 1N - 50 Hz |
| <b>Net Height [mm]</b> | 350      | <b>Basin volume [l]</b>    | 4,5                |

# Technical data sheet

Technical drawing





## Bain Marie 4 containers dry

Model

SAP Code

00015058

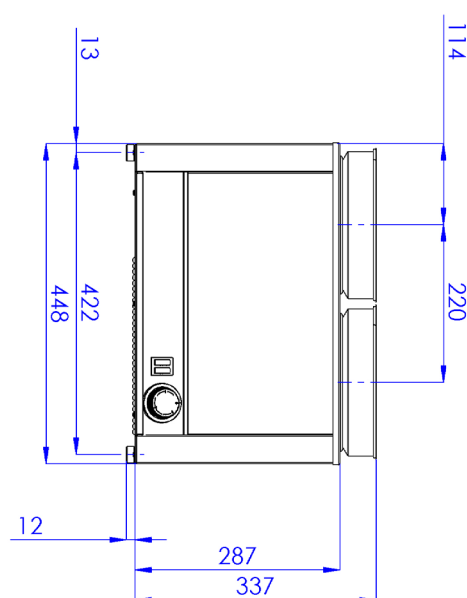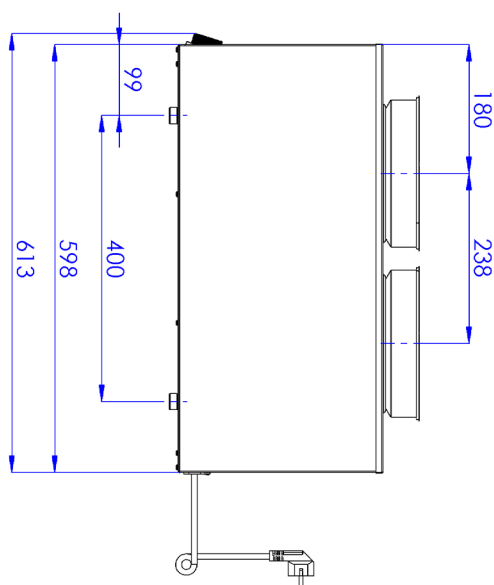

# Technical data sheet

## Technical parameters



### Bain Marie 4 containers dry

**Model**

**SAP Code**

00015058

**1. SAP Code:**

00015058

**2. Net Width [mm]:**

450

**3. Net Depth [mm]:**

600

**4. Net Height [mm]:**

350

**5. Net Weight [kg]:**

16.00

**6. Gross Width [mm]:**

670

**7. Gross depth [mm]:**

670

**8. Gross Height [mm]:**

490

**9. Gross Weight [kg]:**

17.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Table top

**12. Power electric [kW]:**

0.800

**13. Loading:**

230 V / 1N - 50 Hz

**14. Protection of controls:**

IPX4

**15. Material:**

Stainless steel

**16. Indicators:**

operation and warm-up

**17. Basin volume [l]:**

4,5

**18. Volume capacity of the container [l]:**

4.50

**19. Maximum device temperature [°C]:**

90

**20. Minimum device temperature [°C]:**

30

**21. Number of basins:**

4

**22. Drain:**

No

**23. Heating location:**

Under the bottom of the bathtub

**24. Cross-section of conductors CU [mm²]:**

0,5

– Výkon (kW): 2,4-3,3 (230 V)

**25. Device properties:**

Warmed