

Technical data sheet

Product features



Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

Model	SAP Code	00038853
ISN 1021 PD	A group of articles - web	Šokery a multifunkční zařízení



- Shock cooling cycle kg / min (+3 ° C): 50/120
- Shock freeze cycle kg / min (-18 ° C): 20/270
- Minimum device temperature [°C]: -40
- Maximum device temperature [°C]: 10
- Probe: 4-points
- Insulation thickness [mm]: 60
- Control type: Touchscreen
- Display size: 9"
- User programmable cycles: Yes
- Defrosting cycle: Yes

SAP Code	00038853	Number of GN / EN	10
Net Width [mm]	870	GN / EN size in device	GN 2/1
Net Depth [mm]	974	GN device depth	65
Net Height [mm]	1650	Shock cooling cycle kg / min (+3 ° C)	50/120
Net Weight [kg]	167.00	Shock freeze cycle kg / min (-18 ° C)	20/270
Power electric [kW]	1.386	Control type	Touchscreen
Loading	400 V / 3N - 50 Hz	Noise of device	56


Technical data sheet

Technical drawing



Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

Model	SAP Code	00038853
ISN 1021 PD	A group of articles - web	Šokery a multifunkční zařízení

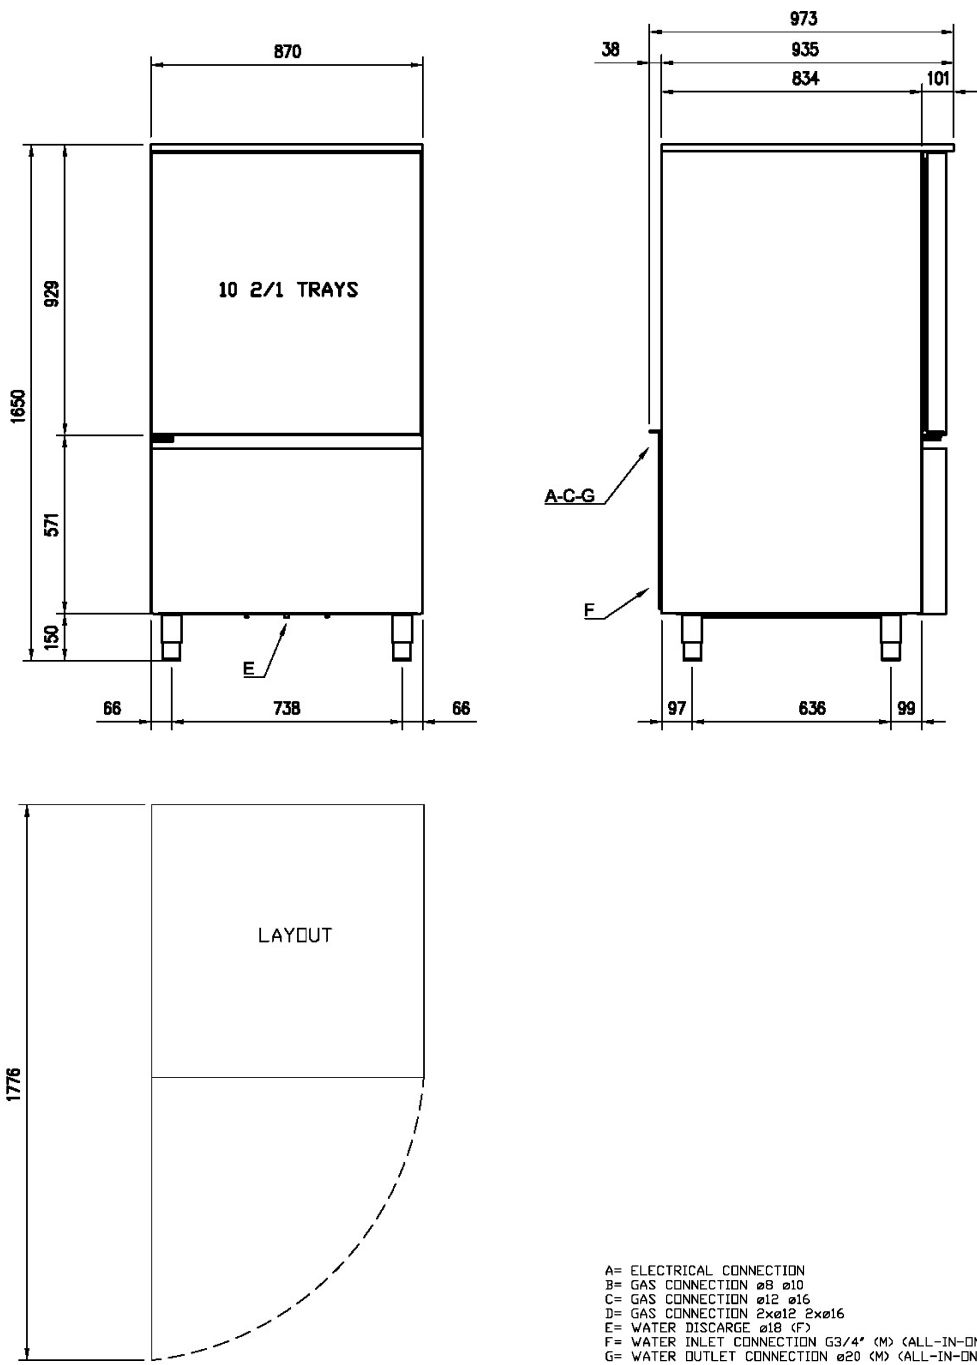

Technical data sheet

Product benefits



Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

Model	SAP Code	00038853
ISN 1021 PD	A group of articles - web	Šokery a multifunkční zařízení

1

Nerezové tělo i vnitřek

odolnost

hygiena

- díky celonerezové konstrukci se velmi snadno udržuje a tím šetří náklady
- plnění hygienických standardů

2

Sledování parametrů HACCP

snadná evidence všech potřebných parametrů

- bezproblémové dokazování správného nakládání s potravinami při případné kontrole

3

Vícebodová sonda

precizní sledování teploty chlazení/mrazení

- díky sondě je lépe zajištěna bezpečnost potravin
- vzhledem k ukončení zchlazování/zmrazování po dosažení teploty šetří energii a čas

4

Rozmrazení

připravenost zamražené potraviny na zpracování na čas

- úspora času
- řízená manipulace s potravinami

Technical data sheet

Technical parameters



Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

Model	SAP Code	00038853
ISN 1021 PD	A group of articles - web	Šokery a multifunkční zařízení

1. SAP Code:

00038853

2. Net Width [mm]:

870

3. Net Depth [mm]:

974

4. Net Height [mm]:

1650

5. Net Weight [kg]:

167.00

6. Gross Width [mm]:

1060

7. Gross depth [mm]:

1057

8. Gross Height [mm]:

1877

9. Gross Weight [kg]:

194.00

10. Device type:

Electric unit

11. Material:

AISI 304

12. Exterior color of the device:

Stainless steel

13. Opening of device:

Hinges on the right

14. Power electric [kW]:

1.386

15. Loading:

400 V / 3N - 50 Hz

16. Control type:

Touchscreen

17. Display size:

9"

18. Refrigerant:

R290

19. Refrigerant weight [g]:

0.35

20. Number of GN / EN:

10

21. GN / EN size in device:

GN 2/1

22. GN device depth:

65

23. Minimum device temperature [°C]:

-40

24. Maximum device temperature [°C]:

10

25. Shock freeze cycle kg / min (-18 ° C):

20/270

26. Shock cooling cycle kg / min (+3 ° C):

50/120

27. Insulation thickness [mm]:

60

28. Long-term cooling function:

Yes

Technical data sheet

Technical parameters



Blast chiller 10x GN 2/1 touch control panel 230 V, Right-hinged door

Model	SAP Code	00038853
ISN 1021 PD	A group of articles - web	Šokery a multifunkční zařízení

29. Longterm freezing function:

Yes

30. Probe:

4-points

31. Self-diagnostics:

Yes

32. Interior lighting:

Yes

33. HACCP:

Yes

34. Filter:

Removable

35. Defrosting cycle:

Yes

36. User programmable cycles:

Yes

37. USB port:

Yes, for HACCP and firmware update

38. Castors:

Optional

39. Real time monitoring parameters:

Energy consumption, Chamber temperature, Probe temperature, Graph with the course of temperature and consumption

40. Standard equipment for device:

central support for 2 x GN 1/1

41. Noise of device:

56

42. Cross-section of conductors CU [mm²]:

0,5