

# Technical data sheet

## Product features



### Food display island chilled GN 6-1/1 - 30 mm, RAL

<b>Model</b>	<b>SAP Code</b>	00012206
--------------	-----------------	----------



- Buffet type: LIME - chilled, static cooling, shallow
- Device properties: Chilled
- Number of GN / EN: 6
- GN / EN size in device: GN 1/1
- GN device depth: 30
- Minimum device temperature [°C]: 4
- Maximum device temperature [°C]: 8

<b>SAP Code</b>	00012206	<b>Loading</b>	230 V / 1N - 50 Hz
<b>Net Width [mm]</b>	2144	<b>Number of GN / EN</b>	6
<b>Net Depth [mm]</b>	650	<b>GN / EN size in device</b>	GN 1/1
<b>Net Height [mm]</b>	1488	<b>GN device depth</b>	30
<b>Net Weight [kg]</b>	167.00	<b>Minimum device temperature [°C]</b>	4
<b>Power electric [kW]</b>	0.247	<b>Maximum device temperature [°C]</b>	8

# Technical data sheet

Technical drawing




Food display island chilled GN 6-1/1 - 30 mm, RAL

Model

SAP Code

00012206

A= ELECTRICAL CONNECTION  
 D= WATER DISCHARGE Ø14  
 E= GAS CONNECTION Ø6 Ø8

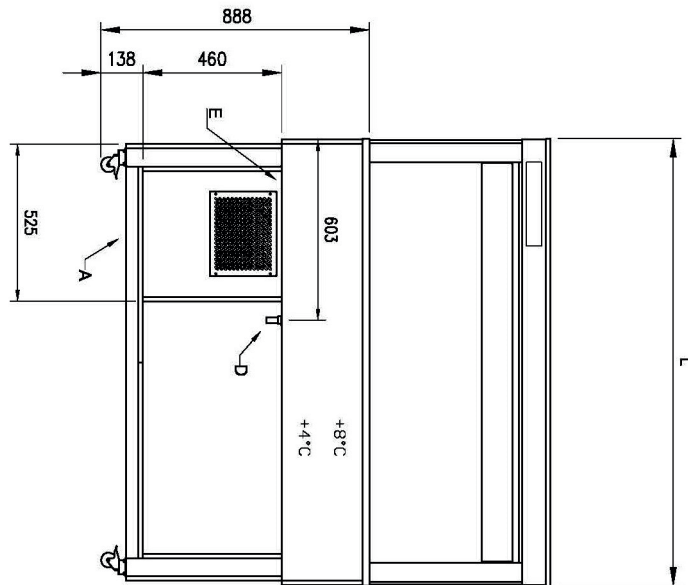

GN	L
3/1	1169
4/1	1494
6/1	2144



# Technical data sheet

## Product benefits



### Food display island chilled GN 6-1/1 - 30 mm, RAL

Model

SAP Code

00012206

1

#### Static cooling

- simultaneous use of direct injection and boiler, maintenance of 100% humidity, or its regulation
- less drying of food
  - more economical

2

#### Breathing screen with electric drive

- the possibility of easily covering the food
- higher hygienic safety
  - ease of use
  - attractiveness

3

#### LED lighting

- minimal energy consumption
- economical lighting
  - attractive appearance

4

#### Removable evaporator filter

- easy disassembly
- time saving for cleaning

5

#### All-stainless steel construction

- harmless to health for contact with food  
robustness
- perfect sanitation
  - long service life

6

#### Rounded corners

- basins without sharp edges and corners
- higher hygienic safety
  - time saving due to easy cleaning

7

#### Depth 3mm

- the possibility of placing plates and trays
- variability of use

8

#### Travel wheels

- portable buffet table
- greater flexibility in dispensing
  - possibility of use at banquets
  - easier and safer handling

9

#### Breathing galley with trigger

- galerka made of hygienic Plexiglas with motorized displacement
- hygienic food protection
  - the possibility of sealing before dispensing - extending the shelf life of food

# Technical data sheet

Technical parameters



## Food display island chilled GN 6-1/1 - 30 mm, RAL

**Model**

**SAP Code**

00012206

**1. SAP Code:**

00012206

**2. Net Width [mm]:**

2144

**3. Net Depth [mm]:**

650

**4. Net Height [mm]:**

1488

**5. Net Weight [kg]:**

167.00

**6. Gross Width [mm]:**

2208

**7. Gross depth [mm]:**

714

**8. Gross Height [mm]:**

1595

**9. Gross Weight [kg]:**

192.20

**10. Device type:**

Electric unit

**11. Material:**

Stainless steel

**12. Buffet type:**

LIME - chilled, static cooling, shallow

**13. Device properties:**

Chilled

**14. Exterior color of the device:**

RAL

**15. Power electric [kW]:**

0.247

**16. Loading:**

230 V / 1N - 50 Hz

**17. Number of GN / EN:**

6

**18. GN / EN size in device:**

GN 1/1

**19. GN device depth:**

30

**20. Minimum device temperature [°C]:**

4

**21. Maximum device temperature [°C]:**

8

**22. Interior lighting:**

No

**23. Cross-section of conductors CU [mm<sup>2</sup>]:**

0,5

- Výkon (kW): 2,4-3,3 (230 V)

**24. Refrigerant:**

R290