



Pot and pan washer double skin 55x61 - 400 V		
Model	SAP Code	00011966
S 107 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 8
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011966	Power electric [kW]	10.500
Net Width [mm]	720	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	780	Water consumption of the washing cycle [l/basket]	3
Net Height [mm]	1730	Door clear height [mm]	650
Net Weight [kg]	148.00	Rack size [mm]	560 x 630




Technical drawing

Pot and pan washer double skin 55x61 - 400 V		
Model	SAP Code	00011966
S 107 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

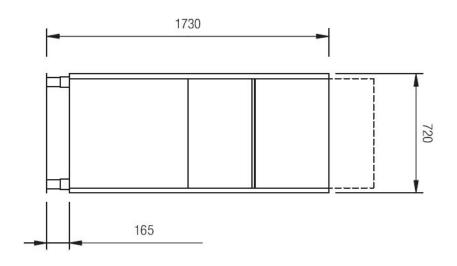

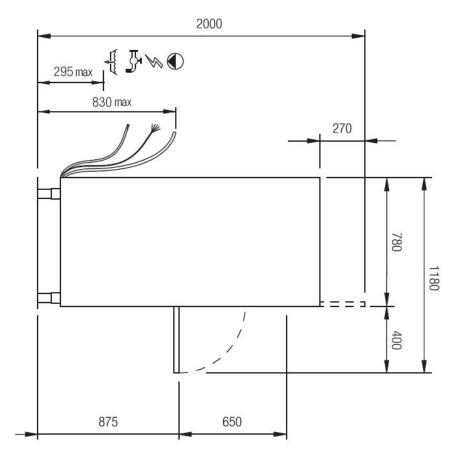





Pot and pan washer double skin 55x61 - 400 V		
Model	SAP Code	00011966
S 107 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction round construction with stainless steel, rounded edges, Deep-drawn bathtub

Stainless steel washing arms
upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

3 LED Display smartScreen, a large color graphic display showing the washing progress

Double pump
unique two-way DuoFlow pump

Detergent dispensers two detergent and rinse aid dispensers

6 Double filter system
the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

Energy saving
energy saving energy saving system due to lowering the
temperature of the boiler

Protection of fragile dishes
softstart system for gradual start of washing programs to protect fragile dishes

Double shell constructionstainless steel construction with insulated double jacket

Fast heating

performance management allows the current running of the boiler and basins body

Air break tank
the open system of the boiler rinse, in cooperation
with the rinse pump, ensures a constant pressure and
temperature of the rinse



Technical parameters

Pot and pan washer double skin 55	x61 - 400 V	
Model	SAP Code	00011966
S 107 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011966		15. Number of programs: 8
2. Net Width [mm]: 720		16. Opening of device: Tilting down
3. Net Depth [mm]: 780		17. Door clear height [mm]: 650
4. Net Height [mm]: 1730		18. Inlet pressure [bar]: 2-4
5. Net Weight [kg]: 148.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 870		20. Number of skin:
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Number of arms for both rinsing and washing:
9. Gross Weight [kg]: 157.00		23. Arm connection: Click-clack - easy removal with one hand
10. Device type: Electric unit		24. Washing arm type: Rotating trident
11. Control type: Digital		25. Washing arm material: Composite
12. Material: AISI 304		26. Atmospheric boiler with rinse pump: Yes
13. Power electric [kW]: 10.500		27. Rinsing arm type: Rotating trident
14. Loading:		28. Rinsing arm material:

400 V / 3N - 50 Hz

Composite



Technical parameters

Pot and pan washer double skin 55x61 - 400 V		
Model	SAP Code	00011966
S 107 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Deep drawn tank: Yes		40. Hot water electric valve: Yes
30. Rack support: Pressed		41. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
31. Tank surface strainers: stainless steel		42. Rack size [mm]: 560 x 630
32. Drain filter: Evolution3 - double filtration with partial discharge before the rinsing of clean water to waste		43. Display type: LCD multifunction display
33. Thermostop: Yes		44. USB port: Yes, for Firmware actualisation
34. Boiler thermostat adjust: Yes		45. Self-diagnostics: Yes
35. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump		46. Wash pump type: two-way - DuoFlow
36. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature		47. Detergent dispenser: Yes
37. Rinse system: ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure		48. Rinse aid dispenser: Yes
38. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle		49. Water consumption of the washing cycle [l/basket]: 3

39. Quick heating system:

QuickReady - System for rapid heating of water in the tank

Yes

50. Program ProFessional 2:



Technical parameters

Pot and pan washer double skin 55x61 - 400 V		
Model	SAP Code	00011966
S 107 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
51. Program ProFessional 4: Yes 52. Program ProFessional 6:		56. Program ProEco: Yes 57. Program ProLong:
Yes 53. Program ProFessional 8: Yes		Yes 58. Cross-section of conductors CU [mm²]: 2,5
54. Program ProFessional 10: Yes		59. Water supply connection: 3/4"
55. Program ProSelf: Yes		60. Diameter nominal: DN 50