

# Technical data sheet

## Product features



### Rack conveyor dishwasher 120 racks/hour hot water, left exit

|              |                                  |                   |
|--------------|----------------------------------|-------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00010030          |
| CT 120 LX    | <b>A group of articles - web</b> | Tunel dishwashers |



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: ProSmart LED interface
- Number of programs: 2
- Number of skin: 2
- Maximal rack feed [racks/h]: 120
- Door clear height [mm]: 450
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 1,3 - 2,7
- Washing cycle time [s/basket]: 30 - 60
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Detergent dispenser: Yes
- Rinse aid dispenser: Yes

|                              |                    |                                                          |           |
|------------------------------|--------------------|----------------------------------------------------------|-----------|
| <b>SAP Code</b>              | 00010030           | <b>Boiler power [kW]</b>                                 | 9.500     |
| <b>Net Width [mm]</b>        | 1150               | <b>Basin volume [l]</b>                                  | 70        |
| <b>Net Depth [mm]</b>        | 770                | <b>Tank power [kW]</b>                                   | 10.500    |
| <b>Net Height [mm]</b>       | 1588               | <b>Water consumption of the washing cycle [l/basket]</b> | 1,3 - 2,7 |
| <b>Net Weight [kg]</b>       | 176.00             | <b>Washing cycle time [s/basket]</b>                     | 30 - 60   |
| <b>Power electric [kW]</b>   | 22.000             | <b>Maximal rack feed [racks/h]</b>                       | 120       |
| <b>Loading</b>               | 400 V / 3N - 50 Hz | <b>Door clear height [mm]</b>                            | 450       |
| <b>Boiler capacity [ l ]</b> | 17.00              | <b>Rack size [mm]</b>                                    | 500 x 500 |

# Technical data sheet

Technical drawing



## Rack conveyor dishwasher 120 racks/hour hot water, left exit

Model


SAP Code

00010030

CT 120 LX

A group of  
articles - web

Tunel dishwashers

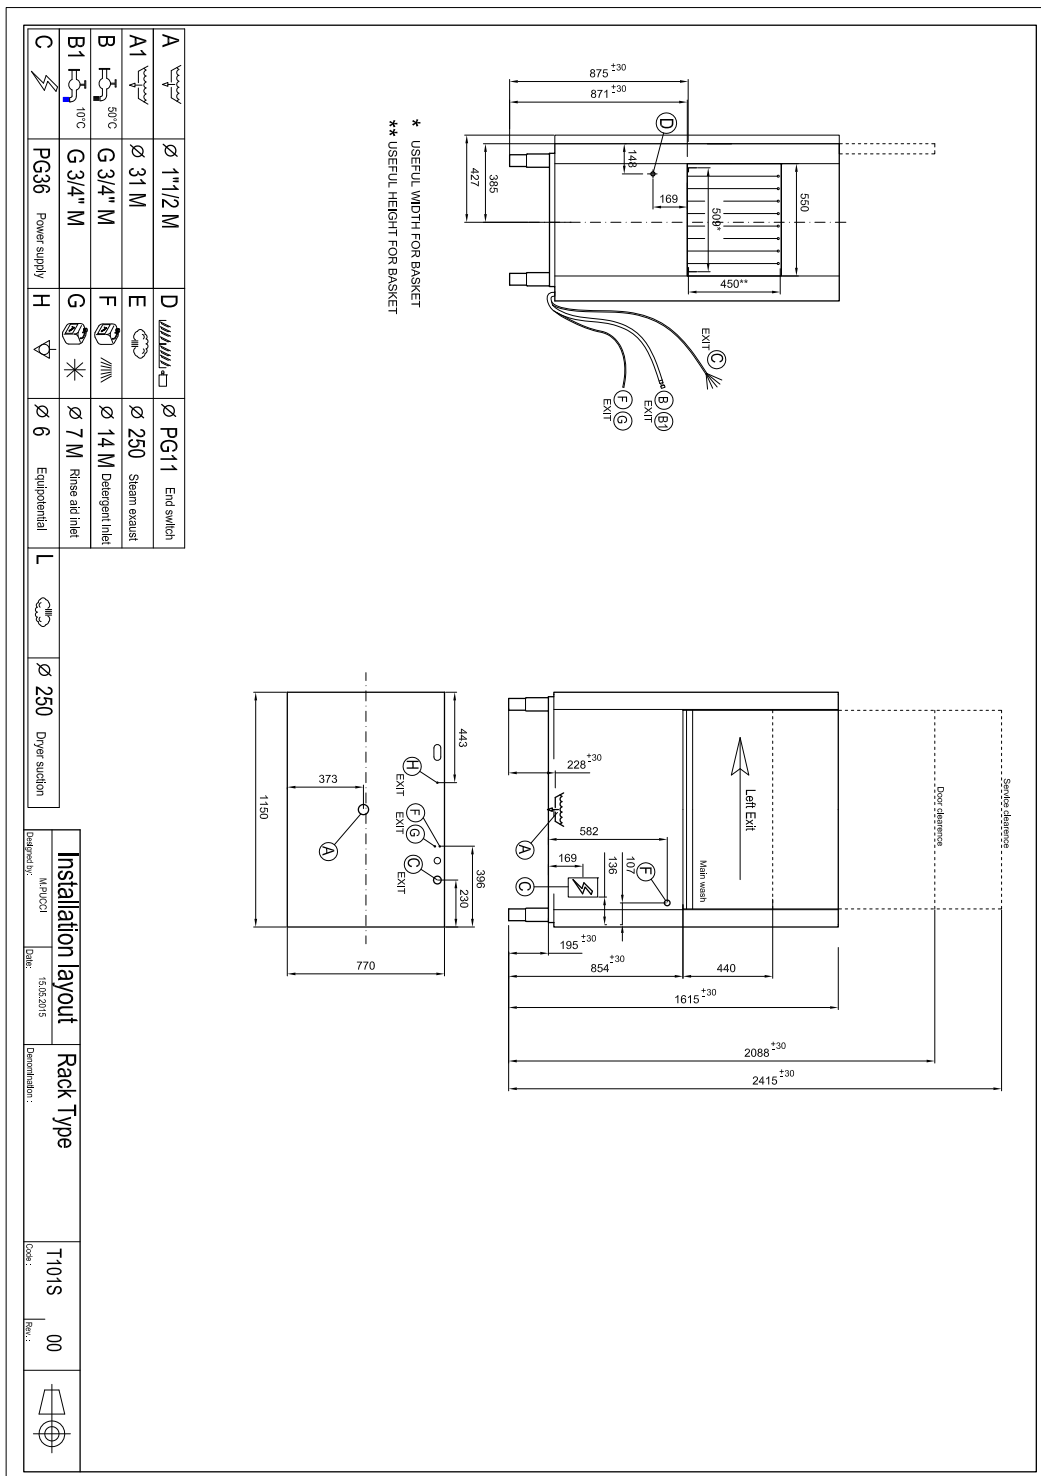

# Technical data sheet

## Product benefits



### Rack conveyor dishwasher 120 racks/hour hot water, left exit

|              |                                  |                   |
|--------------|----------------------------------|-------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00010030          |
| CT 120 LX    | <b>A group of articles - web</b> | Tunel dishwashers |

1

#### **Stainless steel outer shell construction**

round construction with stainless steel, rounded edges, Deep-drawn bathtub

2

#### **LED Display**

proScreen 4 local display + 2 LED strips

3

#### **Detergent dispensers**

two detergent and rinse aid dispensers

4

#### **Double filter system**

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

5

#### **Energy saving**

Energy Saving energy saving system due to lowering the temperature of the boiler

6

#### **Protection of fragile dishes**

softStart system of gradual start of washing programs to protect fragile dishes

7

#### **Double shell construction**

stainless steel construction with insulated double jacket

8

#### **Fast heating**

Performance management allows the current running of the boiler and basins body

9

#### **Sliding system**

a sliding system that moves the baskets through individual washing zones, the possibility to connect the drive to automatic tables

10

#### **Possibility of recovery**

saving up to 40% of boiler energy  
improves the comfort environment of the workplace  
environment without steam  
saves water

# Technical data sheet

## Technical parameters



### Rack conveyor dishwasher 120 racks/hour hot water, left exit

|              |                                  |                   |
|--------------|----------------------------------|-------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00010030          |
| CT 120 LX    | <b>A group of articles - web</b> | Tunel dishwashers |

**1. SAP Code:**

00010030

**2. Net Width [mm]:**

1150

**3. Net Depth [mm]:**

770

**4. Net Height [mm]:**

1588

**5. Net Weight [kg]:**

176.00

**6. Gross Width [mm]:**

1280

**7. Gross depth [mm]:**

920

**8. Gross Height [mm]:**

1800

**9. Gross Weight [kg]:**

202.00

**10. Device type:**

Electric unit

**11. Control type:**

Digital

**12. Material:**

AISI 304

**13. Power electric [kW]:**

22.000

**14. Loading:**

400 V / 3N - 50 Hz

**15. Number of programs:**

2

**16. Opening of device:**

Retractable up

**17. Door clear height [mm]:**

450

**18. Inlet pressure [bar]:**

2-4

**19. Adjustable feet:**

Yes

**20. Number of skin:**

2

**21. Modular construction:**

Yes

**22. Pre-wash module:**

No

**23. Maximal rack feed [racks/h]:**

120

**24. Self-cleaning cycle:**

No

**25. Boiler capacity [ l ]:**

17.00

**26. Boiler power [kW]:**

9.500

**27. Basin volume [l]:**

70

**28. Tank power [kW]:**

10.500

# Technical data sheet

## Technical parameters



### Rack conveyor dishwasher 120 racks/hour hot water, left exit

|              |                                  |                   |
|--------------|----------------------------------|-------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00010030          |
| CT 120 LX    | <b>A group of articles - web</b> | Tunel dishwashers |

**29. Number of washing arms:**

3

**30. Number of rinsing arms:**

2

**31. Washing arm type:**

Firm

**32. Washing arm material:**

Stainless steel

**33. Atmospheric boiler with rinse pump:**

No

**34. Rinsing arm type:**

Firm

**35. Rinsing arm material:**

Stainless steel

**36. Deep drawn tank:**

Yes

**37. Rack support:**

welded

**38. Tank surface strainers:**

stainless steel

**39. Boiler thermostat adjust:**

Yes

**40. Rack feed capacity:**

60-120

**41. Detergent and rinse pump system:**

ProDose - accurate dosing with a peristaltic pump

**42. Hot water electric valve:**

Yes

**43. Rack size [mm]:**

500 x 500

**44. Min supply water temperature [°C]:**

40

**45. Max supply water temperature [°C]:**

60

**46. Display type:**

ProSmart LED interface

**47. USB port:**

Yes, for Firmware actualisation

**48. Self-diagnostics:**

Yes

**49. Double rinse:**

No

**50. Wash pump type:**

two-way - DuoFlow

**51. Detergent dispenser:**

Yes

**52. Rinse aid dispenser:**

Yes

**53. Water consumption of the washing cycle [l/basket]:**

1,3 - 2,7

**54. Washing cycle time [s/basket]:**

30 - 60

**55. Rinse water temperature [°C]:**

82

**56. Standard equipment for device:**

1x glass basket, 1x plate basket, 1x cutlery basket

# Technical data sheet

## Technical parameters



### Rack conveyor dishwasher 120 racks/hour hot water, left exit

|              |                                  |                   |
|--------------|----------------------------------|-------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00010030          |
| CT 120 LX    | <b>A group of articles - web</b> | Tunel dishwashers |

**57. Program ProSpeed:**

No

**58. Program ProFessional:**

No

**59. Program ProFessional 2:**

No

**60. Program ProFessional 4:**

No

**61. Program ProFessional 6:**

No

**62. Program ProFessional 8:**

No

**63. Program ProFessional 10:**

No

**64. Program ProTemp:**

No

**65. Program ProSelf:**

No

**66. Program ProClean:**

No

**67. Program ProDrain:**

No

**68. Program ProEco:**

No

**69. Program ProNew:**

No

**70. Program ProLong:**

No

**71. Program ProGlass:**

No

**72. Program ProPlates:**

No

**73. Program ProCold:**

No

**74. Program ProWater:**

No

**75. Program ProActive:**

No

**76. Program ProActive 5:**

No

**77. Program ProActive 7:**

No

**78. Program ProSteel:**

No

**79. Program ProSan:**

No

**80. Program High Capacity:**

Yes

**81. Program General purpose:**

No

**82. Program Prolonged contact (DIN 10534):**

Yes

**83. Program Glasses:**

No

**84. Cross-section of conductors CU [mm<sup>2</sup>]:**

10

# Technical data sheet

Technical parameters



## Rack conveyor dishwasher 120 racks/hour hot water, left exit

|              |                                  |                   |
|--------------|----------------------------------|-------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00010030          |
| CT 120 LX    | <b>A group of articles - web</b> | Tunel dishwashers |

### 85. Water supply connection:

3/4"

### 86. Diameter nominal:

DN 50