

Technical data sheet

Product features



Chip scuttle heated from above and below ceramic heat lamp

Model	SAP Code	00008705
BMV 1115 + IL3	A group of articles - web	Fryers and French Fries Holders



- Drain: Yes
- Maximum device temperature [°C]: 90
- Minimum device temperature [°C]: 30
- Material: Stainless steel
- Heating location: Upper and lower

SAP Code	00008705	Net Weight [kg]	13.00
Net Width [mm]	330	Power electric [kW]	1.200
Net Depth [mm]	587	Loading	230 V / 1N - 50 Hz
Net Height [mm]	447		


Technical data sheet

Technical drawing



Chip scuttle heated from above and below ceramic heat lamp

Model	SAP Code	00008705
BMV 1115 + IL3	A group of articles - web	Fryers and French Fries Holders

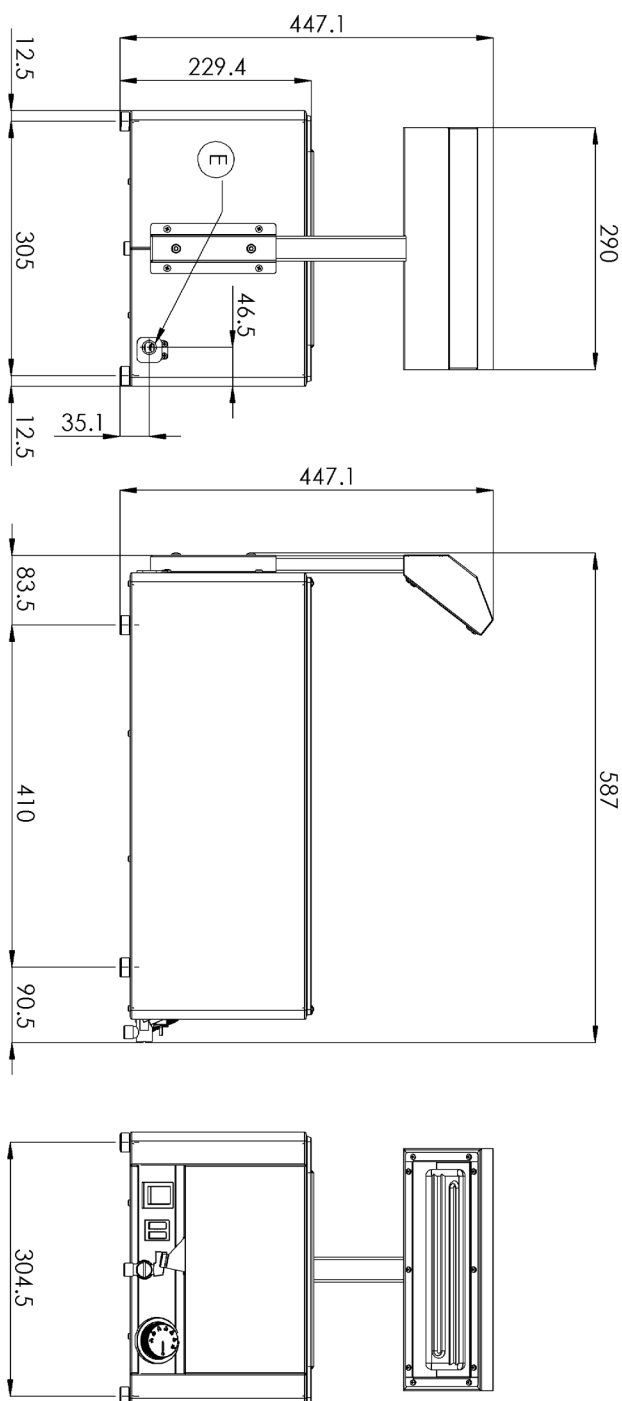

Technical data sheet



Product benefits

Chip scuttle heated from above and bellow ceramic heat lamp

Model	SAP Code	00008705
BMV 1115 + IL3	A group of articles - web	Fryers and French Fries Holders

1

All-stainless steel bathtub

long life
resistance of AISI 304 stainless steel material
the material does not cut

2

Degree of protection of the control elements IPX4

maintenance-free system
resistance to splash water
long life

3

Upper heating

radiant heat from above as well

Technical data sheet

Technical parameters



Chip scuttle heated from above and bellow ceramic heat lamp

Model	SAP Code	00008705
BMV 1115 + IL3	A group of articles - web	Fryers and French Fries Holders

1. SAP Code:

00008705

2. Net Width [mm]:

330

3. Net Depth [mm]:

587

4. Net Height [mm]:

447

5. Net Weight [kg]:

13.00

6. Gross Width [mm]:

395

7. Gross depth [mm]:

705

8. Gross Height [mm]:

482

9. Gross Weight [kg]:

15.00

10. Device type:

Electric unit

11. Construction type of device:

Table top

12. Power electric [kW]:

1.200

13. Loading:

230 V / 1N - 50 Hz

14. Protection of controls:

IPX4

15. Material:

Stainless steel

16. Indicators:

operation and warm-up

17. Device heating type:

Ceramic lamp

18. Maximum device temperature [°C]:

90

19. Minimum device temperature [°C]:

30

20. Adjustable feet:

Yes

21. False bottom:

Yes

22. Drain:

Yes

23. Number of GN / EN:

1

24. GN / EN size in device:

GN 1/1

25. GN device depth:

150

26. Heating location:

Upper and lower

27. Cross-section of conductors CU [mm²]:

0,5