

Technical data sheet



Product features

Undercounter dishwasher single skin with drain pump 35x35 - 230 V

Model	SAP Code	00011264
--------------	-----------------	----------



- Display type: 3 local display + diode bar
- Number of programs: 5
- Number of skin: 1
- Door clear height [mm]: 260
- Rack size [mm]: 350 x 350
- Water consumption of the washing cycle [l/basket]: 1,6
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011264	Boiler power [kW]	2.600
Net Width [mm]	401	Basin volume [l]	7
Net Depth [mm]	490	Tank power [kW]	0.600
Net Height [mm]	595	Water consumption of the washing cycle [l/basket]	1,6
Net Weight [kg]	28.00	Washing cycle time [s/basket]	60-120-150
Power electric [kW]	3.500	Door clear height [mm]	260
Loading	230 V / 1N - 50 Hz	Rack size [mm]	350 x 350
Boiler capacity [l]	2.60	Noise of device	61

Technical data sheet





Technical drawing

Undercounter dishwasher single skin with drain pump 35x35 - 230 V

Model

SAP Code

00011264

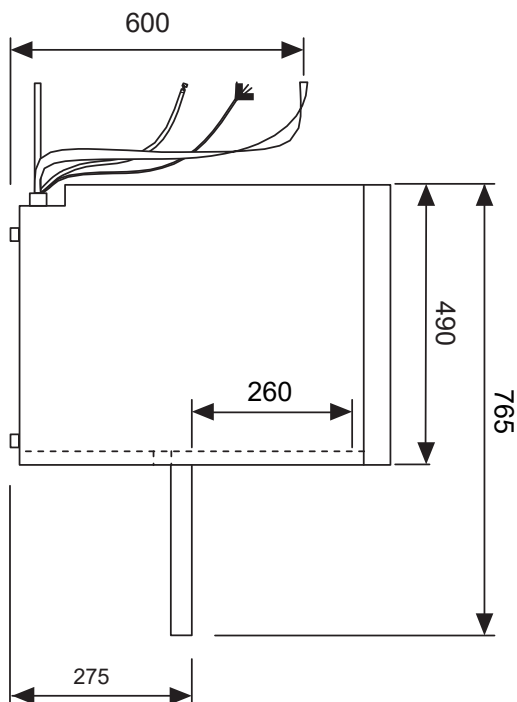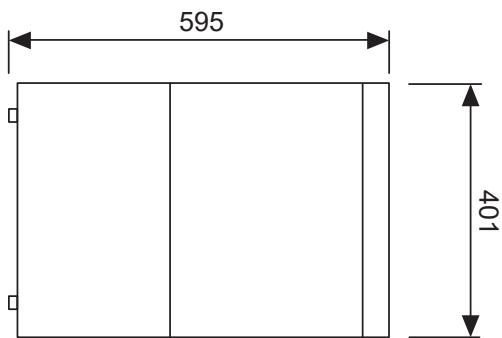

Undercounter dishwasher single skin with drain pump 35x35 - 230 V

Model

SAP Code

00011264

1

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

- easy cleaning, high hygiene standard, long service life

2

Washing arms with a component, common for washing and rinsing

washing arms made of composite material
common arm for washing and rinsing
integrated screw secured against falling out

- easy and safe handling during cleaning; higher user comfort

3

LED Display

three-line display
diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

6

Detergent dispensers

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

8

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving

Technical data sheet



Technical parameters

Undercounter dishwasher single skin with drain pump 35x35 - 230 V

Model	SAP Code	00011264
--------------	-----------------	----------

1. SAP Code:

00011264

15. Number of programs:

5

2. Net Width [mm]:

401

16. Opening of device:

Tilting down

3. Net Depth [mm]:

490

17. Door clear height [mm]:

260

4. Net Height [mm]:

595

18. Inlet pressure [bar]:

2-4

5. Net Weight [kg]:

28.00

19. Adjustable feet:

Yes

6. Gross Width [mm]:

451

20. Number of skin:

1

7. Gross depth [mm]:

540

21. Self-cleaning cycle:

Yes

8. Gross Height [mm]:

645

22. Boiler capacity [l]:

2.60

9. Gross Weight [kg]:

31.00

23. Boiler power [kW]:

2.600

10. Device type:

Electric unit

24. Basin volume [l]:

7

11. Control type:

Digital

25. Tank power [kW]:

0.600

12. Material:

AISI 304

26. Number of arms for both rinsing and washing:

2

13. Power electric [kW]:

3.500

27. Arm connection:

Hand loosen/tighten screw

14. Loading:

230 V / 1N - 50 Hz

28. Washing arm type:

Rotatable two-pronged

Technical data sheet



Technical parameters

Undercounter dishwasher single skin with drain pump 35x35 - 230 V

Model	SAP Code	00011264
--------------	-----------------	----------

29. Washing arm material:

Composite

30. Rinsing arm type:

Rotating two-pronged

31. Rinsing arm material:

Composite

32. Rack support:

Pressed

33. Tank surface strainers:

composite

34. Drain filter:

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

35. Thermostop:

Yes

36. Boiler thermostat adjust:

Yes

37. Rack feed capacity:

24-30-60

38. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

39. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

40. Rack size [mm]:

350 x 350

41. Display type:

3 local display + diode bar

42. USB port:

Yes, for Firmware actualisation

43. Drain pump:

Yes

44. Self-diagnostics:

Yes

45. Wash pump type:

two-way - DuoFlow

46. Detergent dispenser:

Yes

47. Rinse aid dispenser:

Yes

48. Water consumption of the washing cycle [l/basket]:

1,6

49. Washing cycle time [s/basket]:

60-120-150

50. Rinse water temperature [°C]:

65

51. Standard equipment for device:

2x glass basket, 1x cutlery basket

52. Program ProSpeed:

Yes

53. Program ProFessional:

Yes

54. Program ProTemp:

Yes

Technical data sheet

Technical parameters



Undercounter dishwasher single skin with drain pump 35x35 - 230 V

Model	SAP Code	00011264
--------------	-----------------	----------

55. Program ProClean:

Yes

58. Cross-section of conductors CU [mm²]:

1

– Výkon (kW): 3,7-5 (230 V); 6,4-8,7 (400 V)

56. Program ProDrain:

Yes

59. Water supply connection:

3/4"

57. Noise of device:

61

60. Diameter nominal:

DN 50