



Box + evaporator for INFINITY 2011

Model SAP Code 00012530



- Shock cooling cycle kg/min (+3 °C): 110/90
- Shock freeze cycle kg / min (-18 $^{\circ}$ C): 95/240
- Probe: 4-points
- Insulation thickness [mm]: 80
- Control type: Touchscreen
- Display size: 9"
- User programmable cycles: Yes, with save options
- Thaving cycle: YesProving cycle: Yes


SAP Code	00012530	Number of GN / EN	20
Net Width [mm]	1190	GN / EN size in device	GN 1/1
Net Depth [mm]	1332	Shock cooling cycle kg / min (+3 ° C)	110/90
Net Height [mm]	2490	Shock freeze cycle kg / min (-18°C)	95/240
Net Weight [kg]	518.00	Control type	Touchscreen
Power electric [kW]	3.250		It is necessary to pur- chase one of the cooling units in the recom- mended accessories and a valve.
Loading	400 V / 3N - 50 Hz		
		Additional information	Cooling unit for INFINI- TY 2011 RM - UNIT 4 HP Cooling unit for INFIN- ITY 2011 silent RM - UNIT 4 HP SILENT Cooling unit for INFINI- TY 4011 RM - UNIT 9 Coo



Technical drawing

Box + evaporator for INFINITY 2011

Model SAP Code 00012530

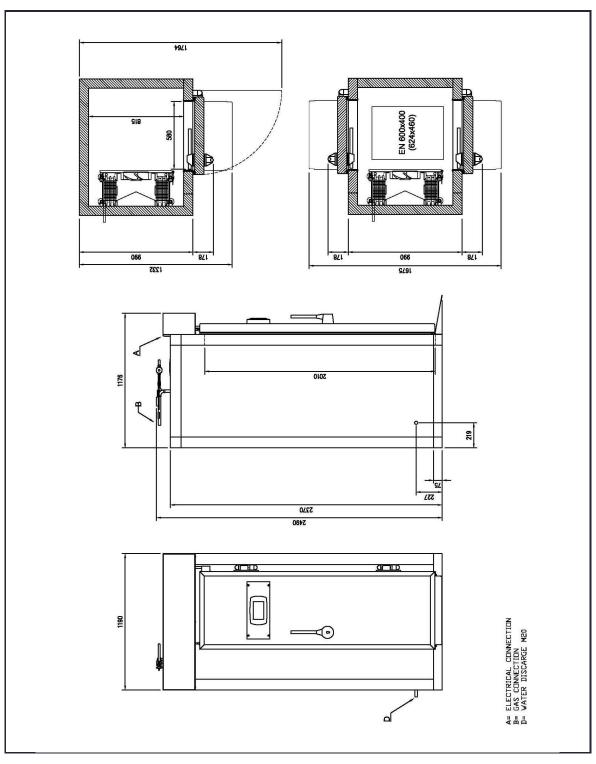





Box + evaporator for INFINITY 2011

Model SAP Code 00012530

6 in 1

can replace 6 devices (fridge, freezer, shocker, hotbox, kitchen, oven)

- saves space, time, energy and the cost of additional equipment due to the enormous variability
- 2 Stainless steel body and interior endurance hygiene
 - thanks to the all-stainless steel construction it is very easy to maintain and thus saves costs
 - Monitoring of HACCP parameters

easy registration of all necessary parameters

- hassle-free proof of proper food handling in the event of an inspection
- Preset cycles

very simple and intuitive operation

- operation can be handled by less qualified operators
- Multipoint probe
 precise monitoring of the cooling/freezing/
 cooking temperature
 - the probe makes it easier to ensure food safety
 - saves energy and time due to the end of cooling/ freezing/cooking when temperature is reached
- Thawing readiness of frozen food for processing on time time saving
 - controlled food handling
- Cooking during the night
 the possibility to preset entire program cycles and run
 them overnight unattended
 - saving equipment capacity during the day
 - saving of human capacity and time due to unattended operation of the equipment overnight



Technical parameters

Box + evaporator for INFINITY 2011				
Model	SAP Code	00012530		
1. SAP Code: 00012530		15. Control type: Touchscreen		
2. Net Width [mm]: 1190		16. Display size: 9"		
3. Net Depth [mm]: 1332		17. Refrigerant: R452a		
4. Net Height [mm]: 2490		18. Number of GN / EN: 20		
5. Net Weight [kg]: 518.00		19. GN / EN size in device: GN 1/1		
6. Gross Width [mm]: 1110		20. Shock freeze cycle kg / min (-18 ° C): 95/240		
7. Gross depth [mm]: 2310		21. Shock cooling cycle kg / min (+3 ° C): 110/90		
8. Gross Height [mm]:		22. Insulation thickness [mm]: 80		
9. Gross Weight [kg]: 538.00		23. Long-term cooling function: Yes		
10. Device type: Electric unit		24. Longterm freezing function: Yes		
11. Material: AISI 304		25. Probe: 4-points		
12. Exterior color of the device: Stainless steel		26. Self-diagnostics: Yes		
13. Power electric [kW]: 3.250		27. HACCP: Yes		

14. Loading:

400 V / 3N - 50 Hz

Yes

28. Low temperature heat treatment:



Technical parameters

Box + evaporator for INFINITY 201	11		
Model	SAP Code	00012530	
29. Low temperature cooking span [°C]: 52-85		34. Castors:	
30. Thaving cycle: Yes		35. Real time monitoring paramaters: Energy consumption, Chamber temperature, Probe temperature, Graph with the course of temperature and consumption	
31. Proving cycle: Yes		36. Standard equipment for device: It is necessary to purchase one of the cooling units in the recommended accessories and a valve.	
32. User programmable cycles: Yes, with save options		37. Additional information: It is necessary to purchase one of the cooling units in the recommended accessories and a valve. Cooling unit for INFINITY 2011 RM - UNIT 4 HP Cooling unit for INFINITY 2011 silent RM - UNIT 4 HP SILENT Cooling unit for INFINITY 4011 RM - UNIT 9 Coo	

33. USB port:

Yes, for HACCP and firmware update