

Technical data sheet

Product features



Panini grill smooth electric with grooved top plate 37x24 230 V

Model	SAP Code	00003100
PM 2015 L	A group of articles - web	Grills and grill plates



- Top type: Smooth
- Griddle dimensions [mm x mm]: 365 x 240
- Griddle thickness [mm]: 8.00
- Container for liquid fat: Yes
- Independent heating zones: Joint control of top and bottom plate
- Maximum device temperature [°C]: 300
- Surface finish: sandblasted surface without coating

SAP Code	00003100	Power electric [kW]	3.000
Net Width [mm]	409	Loading	230 V / 1N - 50 Hz
Net Depth [mm]	407	Griddle dimensions [mm x mm]	365 x 240
Net Height [mm]	186	Top type	Smooth
Net Weight [kg]	20.00		


Technical data sheet

Technical drawing



Panini grill smooth electric with grooved top plate 37x24 230 V

Model	SAP Code	00003100
PM 2015 L	A group of articles - web	Grills and grill plates

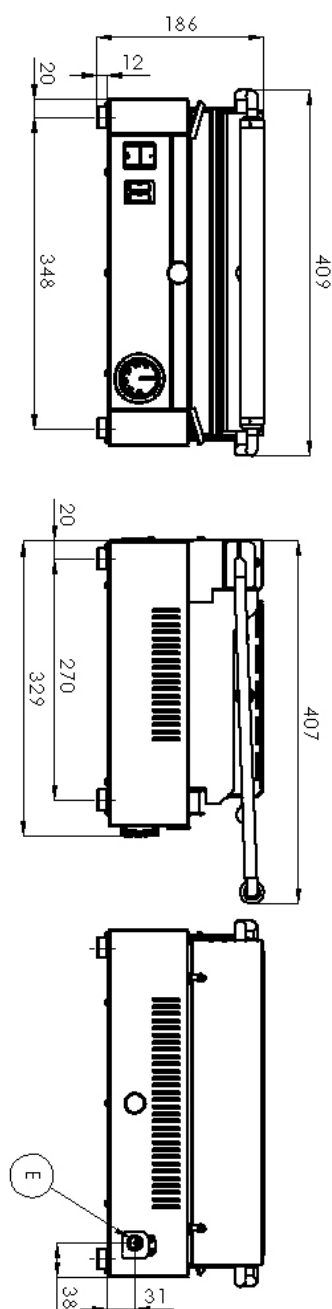

Technical data sheet



Product benefits

Panini grill smooth electric with grooved top plate 37x24 230 V

Model	SAP Code	00003100
PM 2015 L	A group of articles - web	Grills and grill plates

1

All-stainless design

only stainless steel intended for food contact is used

2

Run and warm-up light

optical possibility to check the status of the device

3

Outlet for waste liquids

waste fluid, the fat is no longer burned and drains into the reservoir (drawer)

4

Grill plate with steel alloy 8mm

high thermal conductivity strength stability

Technical data sheet

Technical parameters



Panini grill smooth electric with grooved top plate 37x24 230 V

Model	SAP Code	00003100
PM 2015 L	A group of articles - web	Grills and grill plates

1. SAP Code:

00003100

2. Net Width [mm]:

409

3. Net Depth [mm]:

407

4. Net Height [mm]:

186

5. Net Weight [kg]:

20.00

6. Gross Width [mm]:

470

7. Gross depth [mm]:

435

8. Gross Height [mm]:

230

9. Gross Weight [kg]:

21.00

10. Device type:

Electric unit

11. Construction type of device:

Table top

12. Power electric [kW]:

3.000

13. Loading:

230 V / 1N - 50 Hz

14. Protection of controls:

IPX4

15. Material:

Stainless steel

16. Indicators:

operation and warm-up

17. Surface finish:

sandblasted surface without coating

18. Maximum device temperature [°C]:

300

19. Minimum device temperature [°C]:

50

20. Griddle dimensions [mm x mm]:

365 x 240

21. Griddle thickness [mm]:

8.00

22. Container for liquid fat:

Yes

23. Independent heating zones:

Joint control of top and bottom plate

24. Uniform heating:

Yes

25. Top type:

Smooth

26. Power consumption of the zone 1 [kW]:

1,8

27. Power consumption of the zone 2 [kW]:

1,2

28. Cross-section of conductors CU [mm²]:

0,75