

Technical data sheet

Product features



Hood type dishwasher double skin softener 50x50 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011296 |
| TTA 112 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |



- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 13
- Number of skin: 2
- Door clear height [mm]: 465
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,2
- Washing cycle time [s/basket]: 60-90-180
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

| | | | |
|------------------------------|--------------------|--|-----------|
| SAP Code | 00011296 | Boiler power [kW] | 7.000 |
| Net Width [mm] | 836 | Basin volume [l] | 22 |
| Net Depth [mm] | 721 | Tank power [kW] | 2.500 |
| Net Height [mm] | 1565 | Water consumption of the washing cycle [l/basket] | 2,2 |
| Net Weight [kg] | 116.00 | Washing cycle time [s/basket] | 60-90-180 |
| Power electric [kW] | 10.200 | Door clear height [mm] | 465 |
| Loading | 400 V / 3N - 50 Hz | Rack size [mm] | 500 x 500 |
| Boiler capacity [l] | 12.00 | | |


Technical data sheet

Technical drawing



Hood type dishwasher double skin softener 50x50 - 400 V

| | | |
|--------------------|----------------------------------|--|
| Model | SAP Code | 00011296 |
| TTA 112 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

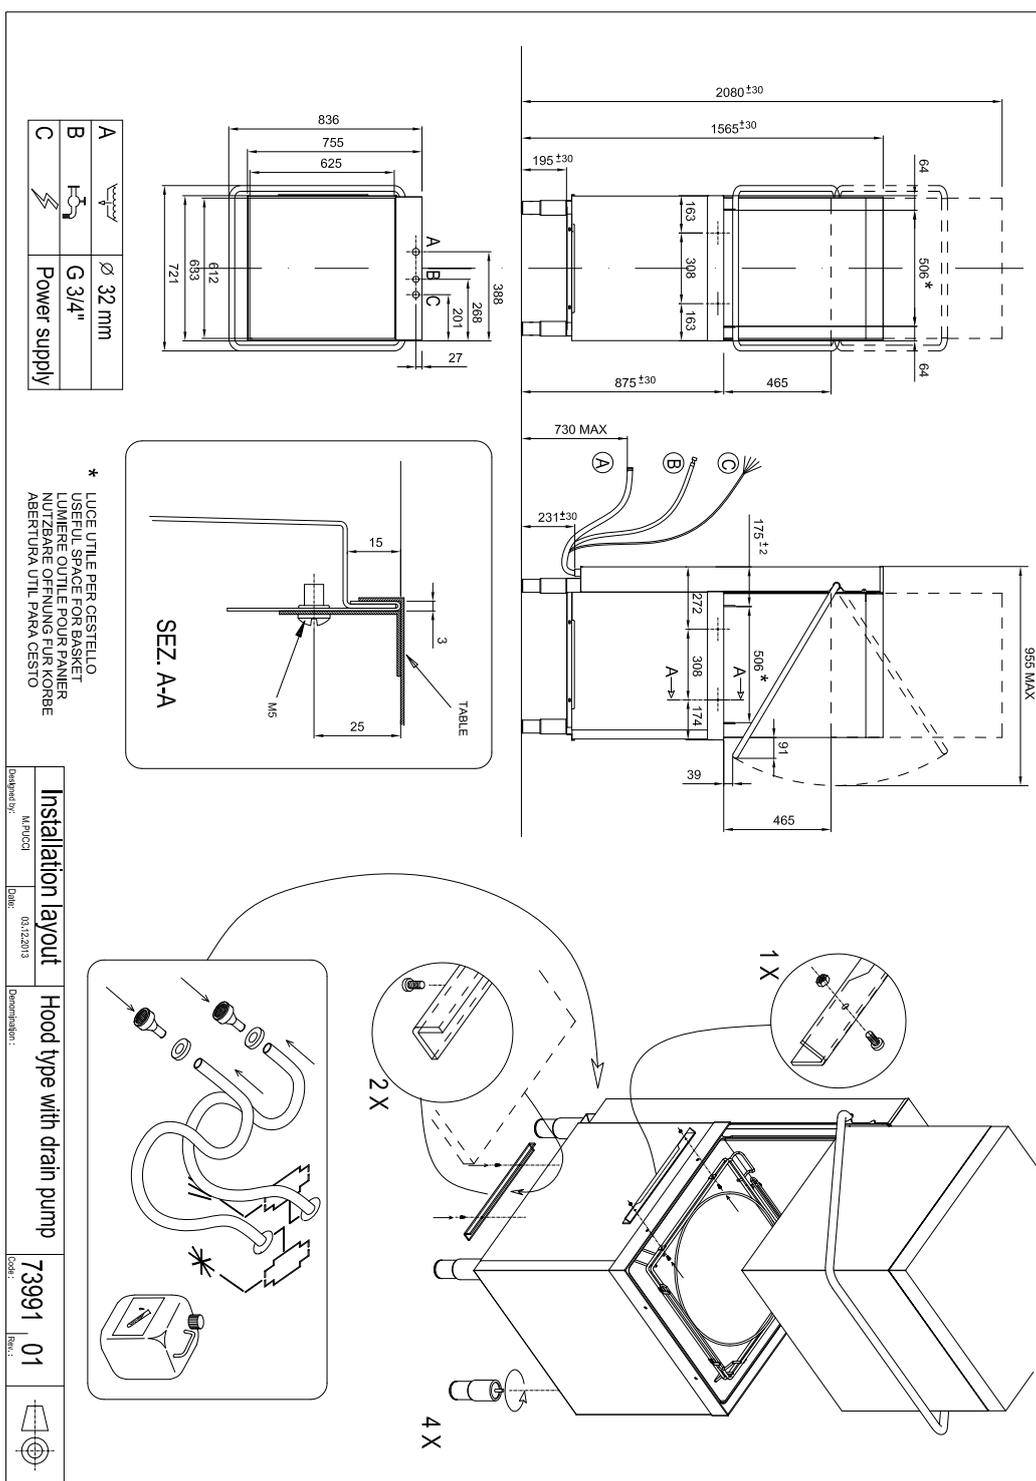

Technical data sheet

Product benefits



Hood type dishwasher double skin softener 50x50 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011296 |
| TTA 112 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

1 | **Stainless steel outer shell construction**
round construction with stainless steel, rounded edges, Deep-drawn bathtub

2 | **Washing arms with a component, common for washing and rinsing**
upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

3 | **LED Display**
proScreen 4 local display + 2 LED strips

4 | **Double pump**
unique two-way DuoFlow pump

5 | **Molded basket supports**
guide rails for the baskets molded from the body of the dishwasher

6 | **Detergent dispensers**
two detergent and rinse aid dispensers

7 | **Double filter system**
the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

8 | **Energy saving**
energy saving energy saving system due to lowering the temperature of the boiler

9 | **Protection of fragile dishes**
softstart system for gradual start of washing programs to protect fragile dishes

10 | **Double shell construction**
stainless steel construction with insulated double jacket

11 | **Fast heating**
performance management allows the current running of the boiler and basins body

Technical data sheet

Technical parameters



Hood type dishwasher double skin softener 50x50 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011296 |
| TTA 112 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

1. SAP Code:

00011296

2. Net Width [mm]:

836

3. Net Depth [mm]:

721

4. Net Height [mm]:

1565

5. Net Weight [kg]:

116.00

6. Gross Width [mm]:

721

7. Gross depth [mm]:

836

8. Gross Height [mm]:

1615

9. Gross Weight [kg]:

126.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

Stainless steel

13. Power electric [kW]:

10.200

14. Loading:

400 V / 3N - 50 Hz

15. Number of programs:

13

16. Opening of device:

Flip up

17. Door clear height [mm]:

465

18. Adjustable feet:

Yes

19. Number of skin:

2

20. Self-cleaning cycle:

Yes

21. Boiler capacity [l]:

12.00

22. Boiler power [kW]:

7.000

23. Basin volume [l]:

22

24. Tank power [kW]:

2.500

25. Number of arms for both rinsing and washing:

2

26. Arm connection:

Hand loosen/tighten screw

27. Washing arm type:

Rotatable two-pronged

28. Washing arm material:

Stainless steel

Technical data sheet

Technical parameters



Hood type dishwasher double skin softener 50x50 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011296 |
| TTA 112 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

29. Atmospheric boiler with rinse pump:

Yes

30. Rinsing arm type:

Rotating two-pronged

31. Rinsing arm material:

Stainless steel

32. Deep drawn tank:

Yes

33. Rack support:

Pressed

34. Tank surface strainers:

stainless steel

35. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

36. Thermostop:

Yes

37. Boiler thermostat adjust:

Yes

38. Rack feed capacity:

60-40-20

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

40. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

41. Rinse system:

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

42. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

43. Quick heating system:

QuickReady - System for rapid heating of water in the tank

44. Lift system:

ProGlide - Required lifting force equals 3 kg thanks to counterweights and gentle guidance, reduces operator fatigue

45. Hot water electric valve:

Yes

46. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

47. Rack size [mm]:

500 x 500

48. Built-in softener:

Yes

49. Display type:

LCD multifunction display

50. Location of control panel:

On the top

Technical data sheet

Technical parameters



Hood type dishwasher double skin softener 50x50 - 400 V

| | | |
|--------------|----------------------------------|--|
| Model | SAP Code | 00011296 |
| TTA 112 ABT | A group of articles - web | Undercounter, continuous and black ware dishwasher |

51. USB port:

Yes, for Firmware actualisation

52. Drain pump:

Yes

53. Self-diagnostics:

Yes

54. Wash pump type:

two-way - DuoFlow

55. Detergent dispenser:

Yes

56. Rinse aid dispenser:

Yes

57. Water consumption of the washing cycle [l/basket]:

2,2

58. Washing cycle time [s/basket]:

60-90-180

59. Rinse water temperature [°C]:

80

60. Standard equipment for device:

1x glass basket, 1x plate basket, 1x cutlery basket

61. Program ProSpeed:

Yes

62. Program ProFessional:

Yes

63. Program ProTemp:

Yes

64. Program ProClean:

Yes

65. Program ProDrain:

Yes

66. Program ProEco:

Yes

67. Program ProNew:

Yes

68. Program ProLong:

Yes

69. Program ProGlass:

Yes

70. Program ProWater:

Yes

71. Program ProActive:

Yes

72. Program ProSteel:

Yes

73. Program ProSan:

Yes

74. Cross-section of conductors CU [mm²]:

2,5

75. Water supply connection:

3/4"

76. Diameter nominal:

DN 50