Product features

Pizza oven 1 chamber 6x d=33 cm



Pizza oven 1 chamber 6x d=33 cm				
Model	SAP Code	00007280		
		 Pizza capacity [cm]: 6x 33 cm Stoneplates: Bottom and top Material: Stainless steel Control type: Mechanical Type of handle: in the entire length stainless steel Steam protection: Yes Independent heating zones: Separate control for the heating element Type of construction: single store Chimney for moisture extraction: Adjustable chimney: Yes Interior lighting: Yes 	rate control for each upper and lower y	
SAP Code	00007280	Minimum device tem- perature [°C]	50	
Net Width [mm]	975	Maximum device tem- perature [°C]	450	
Net Depth [mm]	1185	Width of internal part [mm]	700	
Net Height [mm]	412	Depth of internal part [mm]	1050	
Net Weight [kg]	108.00	Height of internal part [mm]	150	
Power electric [kW]	7.200	Pizza capacity [cm]	6x 33 cm	


Loading

400 V / 3N - 50 Hz

Technical drawing






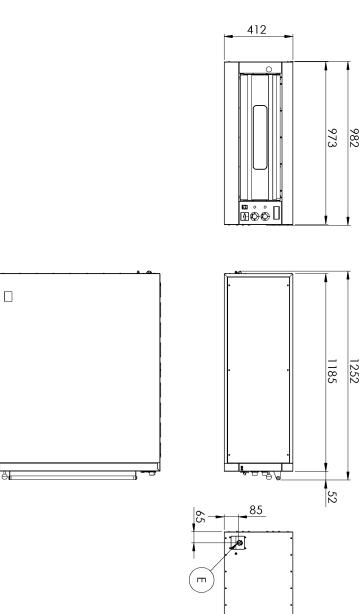

Product benefits



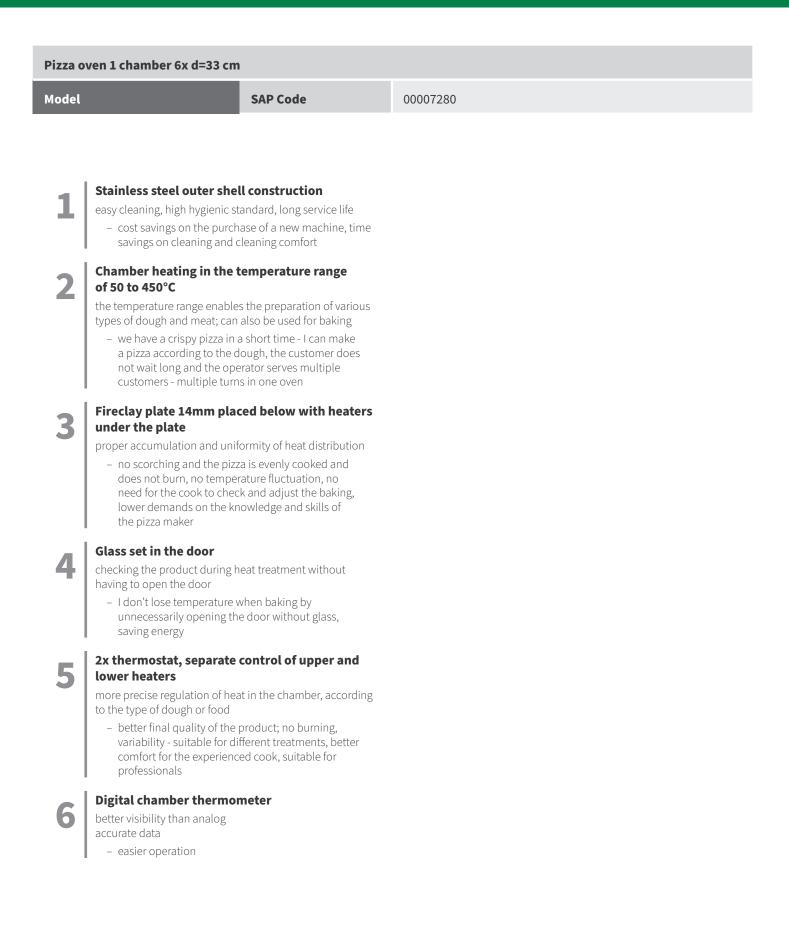

Technical parameters



Pizza oven 1 chamber 6x d=33 cm	
Model S.	AP Code 00007280
1. SAP Code: 00007280	15. Control type: Mechanical
2. Net Width [mm]: 975	16. Width of internal part [mm]:
3. Net Depth [mm]: 1185	17. Depth of internal part [mm]: 1050
4. Net Height [mm]:	18. Height of internal part [mm]:
412	150
5. Net Weight [kg]:	19. Minimum device temperature [°C]:
108.00	50
6. Gross Width [mm]:	20. Maximum device temperature [°C]:
1285	450
7. Gross depth [mm]:	21. Stacking availability:
1075	Yes
8. Gross Height [mm]: 512	22. Pizza capacity [cm]: 6x 33 cm
9. Gross Weight [kg]:	23. Thermometer:
110.00	Analog
10. Exterior color of the device:	24. Indicators:
Stainless steel	running and heating the oven
11. Material:	25. Number of internal parts:
Stainless steel	6
12. Device type:	26. On/Off button:
Electric unit	Yes
13. Power electric [kW]: 7.200	27. Type of handle: in the entire length of the door, stainless steel
14. Loading:	28. Steam protection:
400 V / 3N - 50 Hz	Yes

Technical parameters



Pizza oven 1 chamber 6x d=33 cm			
Model SAP Code	00007280		
29. Protection of controls: IPX4	34. Safety element: thermostat		
30. Stoneplates: Bottom and top	35. Number of cavities:		
31. Independent heating zones: Separate control for each chamber, separate control for the upper and lower heating element	36. Chimney for moisture extraction: Yes		
32. Type of construction: single storey	37. Adjustable chimney: Yes		
33. Interior lighting: Yes	38. Cross-section of conductors CU [mm²]: 1,5 – Výkon (kW): 5-5,7 (230 V); 8,7-9,8 (400 V)		