

Technical data sheet

Product features



Fry Top Griddle grooved chrome

Model

SAP Code

00020641



- Top type: Grooved
- Griddle dimensions [mm x mm]: 560 x 770
- Griddle thickness [mm]: 12.00
- Worktop material: AISI 304
- Container for liquid fat: Yes
- Independent heating zones: Separate control for each heating zone
- Maximum device temperature [°C]: 300
- Surface finish: polished chrome 0.03 mm
- Removable rim: Yes

SAP Code	00020641	Power electric [kW]	9.000
Net Width [mm]	800	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	730	Griddle dimensions [mm x mm]	560 x 770
Net Height [mm]	300	Top type	Grooved
Net Weight [kg]	72.20	Worktop type	Molded - comfortable cleaning maintenance

Technical data sheet

Technical drawing




Fry Top Griddle grooved chrome

Model

SAP Code

00020641

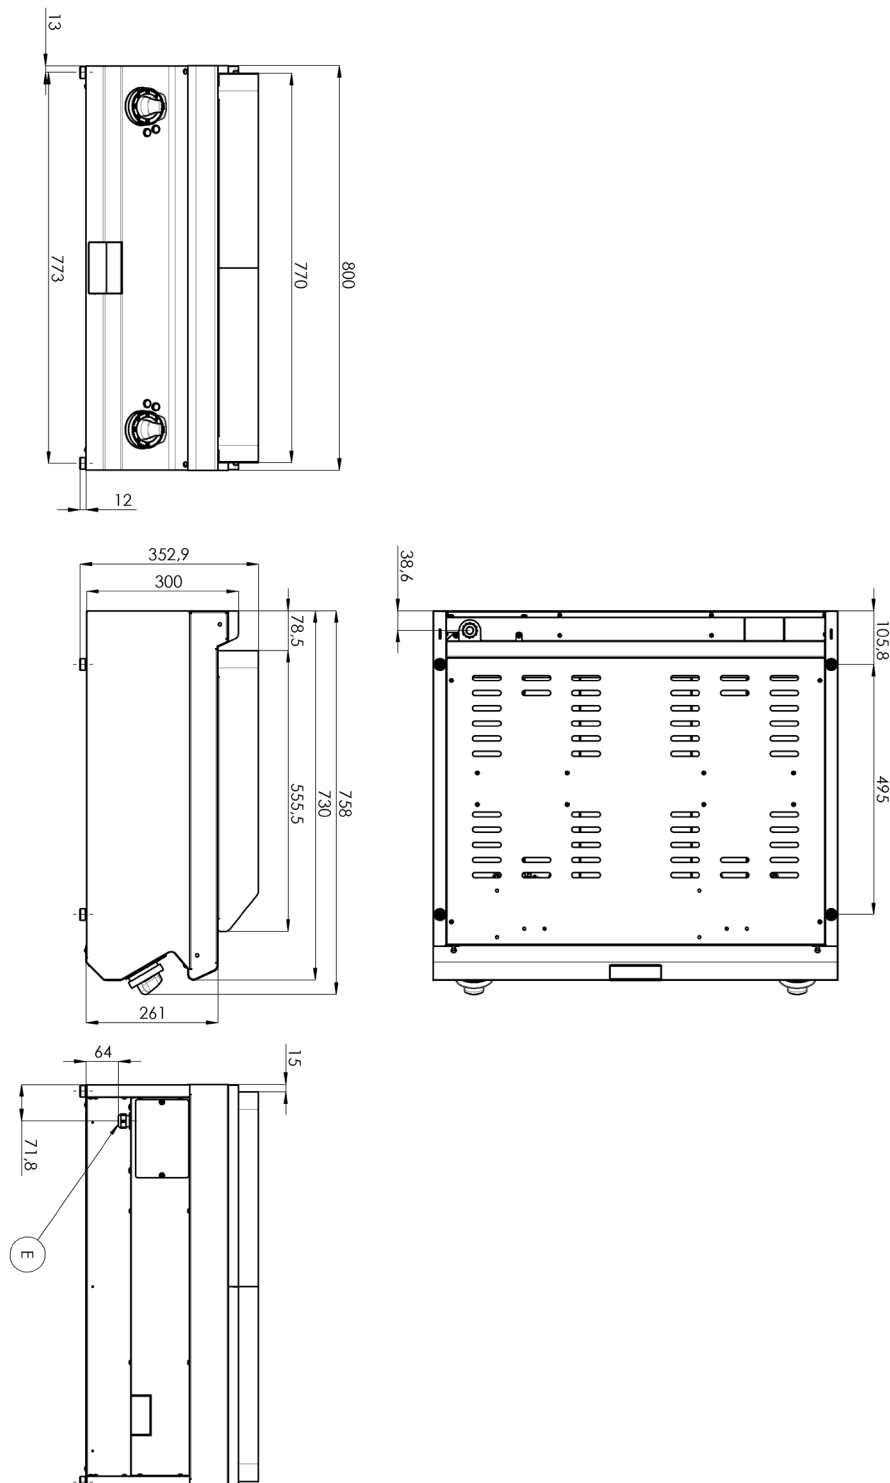

Technical data sheet

Technical parameters



Fry Top Griddle grooved chrome

Model

SAP Code

00020641

1. SAP Code:

00020641

2. Net Width [mm]:

800

3. Net Depth [mm]:

730

4. Net Height [mm]:

300

5. Net Weight [kg]:

72.20

6. Gross Width [mm]:

840

7. Gross depth [mm]:

800

8. Gross Height [mm]:

480

9. Gross Weight [kg]:

81.00

10. Device type:

Electric unit

11. Construction type of device:

Table top

12. Power electric [kW]:

9.000

13. Loading:

400 V / 3N - 50 Hz

14. Protection of controls:

IP24

15. Exterior color of the device:

Stainless steel

16. Material:

AISI 304 top plate and cladding

17. Indicators:

operation and warm-up

18. Worktop type:

Molded - comfortable cleaning maintenance

19. Worktop material:

AISI 304

20. Worktop Thickness [mm]:

1.50

21. Surface finish:

polished chrome 0.03 mm

22. Maximum device temperature [°C]:

300

23. Minimum device temperature [°C]:

50

24. Service accessibility:

Trough the frontal panel

25. Safety thermostat:

Yes

26. Safety thermostat up to x ° C:

360

27. Griddle dimensions [mm x mm]:

560 x 770

28. Griddle thickness [mm]:

12.00

Technical data sheet

Technical parameters



Fry Top Griddle grooved chrome

Model

SAP Code

00020641

29. Container for liquid fat:

Yes

30. Removable device container:

No

31. Independent heating zones:

Separate control for each heating zone

32. Removable rim:

Yes

33. Uniform heating:

Yes

34. Top type:

Grooved

35. Cross-section of conductors CU [mm²]:

2

– Výkon (kW): 9-11 (230 V); 15-19 (400 V)