**Product features** 



articles - web



Pot and pan washer double skin with drain pump 50x60 - 400 V		
Model SAP Code	SAP Code	00011965
S 97 P ABT	A group of	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 14
- Number of skin: 2
- Door clear height [mm]: 405
- Rack size [mm]: 500 x 600
- Water consumption of the washing cycle [l/basket]: 2,4
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011965	Boiler capacity [ l ]	6.00
Net Width [mm]	575	Boiler power [kW]	6.000
Net Depth [mm]	700	Basin volume [l]	23
Net Height [mm]	1290	Tank power [kW]	2.100
Net Weight [kg]	73.00	Water consumption of the washing cycle [l/basket]	2,4
Power electric [kW]	8.800	Door clear height [mm]	405
Loading	400 V / 3N - 50 Hz	Rack size [mm]	500 x 600



Technical drawing

Pot and pan washer double skin with drain pump 50x60 - 400 V		
Model	SAP Code	00011965
S 97 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

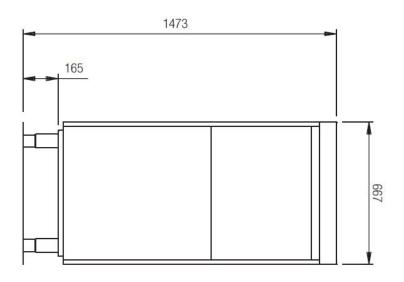

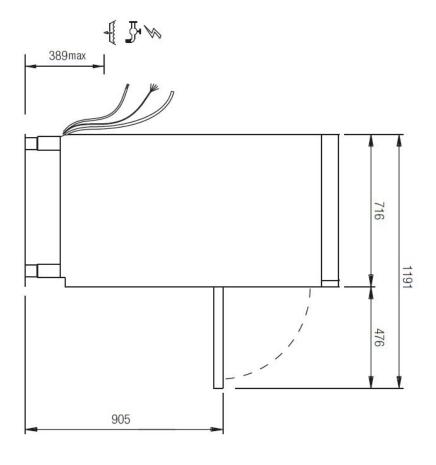





Pot and pan washer double skin with drain pump 50x60 - 400 V		
Model	SAP Code	00011965
S 97 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Stainless steel washing arms upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm
  - easy and safe handling during cleaning; higher user comfort
- **LED Display** smartScreen, a large color graphic display showing the washing progress
  - easy control of the dishwasher operation
  - continuous information on the status of the wash cycle
  - diagnostics in the event of a fault
  - **Double pump** unique two-way DuoFlow pump
    - distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- **Detergent dispensers** two detergent and rinse aid dispensers
  - precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- **Double filter system** the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
  - higher washing efficiency; longer life of the washing bath
- **Energy saving** energy saving energy saving system due to lowering the temperature of the boiler
  - cost saving

**Protection of fragile dishes** 

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- **Double shell construction** stainless steel construction with insulated double jacket
  - quiet operation energy saving
- **Fast heating** 10 performance management allows the current running of the boiler and basins body
  - guick first warm-up of the dishwasher
  - smooth operation

Air break tank the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization



#### Technical parameters

Pot and pan washer double skin w	vith drain pump 50x	60 - 400 V
Model	SAP Code	00011965
S 97 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>1. SAP Code:</b> 00011965		<b>15. Number of programs:</b> 14
<b>2. Net Width [mm]:</b> 575		<b>16. Opening of device:</b> Tilting down
3. Net Depth [mm]: 700  4. Net Height [mm]: 1290		17. Door clear height [mm]: 405  18. Inlet pressure [bar]: 2-4
<b>6. Gross Width [mm]:</b> 780		20. Number of skin:
<b>7. Gross depth [mm]:</b> 670		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 1250		22. Boiler capacity [ l ]: 6.00
9. Gross Weight [kg]: 79.00		23. Boiler power [kW]: 6.000
10. Device type: Electric unit		24. Basin volume [l]:
L1. Control type: Digital		25. Tank power [kW]: 2.100
<b>12. Material:</b> AISI 304		26. Number of arms for both rinsing and washing:
L3. Power electric [kW]: 8.800		<b>27. Arm connection:</b> Click-clack - easy removal with one hand
14. Loading:		28. Washing arm type:

400 V / 3N - 50 Hz

Rotating trident



#### Technical parameters

Pot and pan washer double skin w	ith drain pump 50x60 -	400 V
Model	SAP Code	00011965
S 97 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>29. Washing arm material:</b> Composite		<b>40. Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the boiler temperature
<b>30. Atmospheric boiler with rinse pump:</b> Yes		41. Rinse system:  ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure
31. Rinsing arm type: Rotating trident		<b>42. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
32. Rinsing arm material: Composite		<b>43. Quick heating system:</b> QuickReady - System for rapid heating of water in the tank
33. Deep drawn tank: Yes		<b>44. Hot water electric valve:</b> Yes
34. Rack support: Pressed		<b>45. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
35. Tank surface strainers: stainless steel		<b>46. Rack size [mm]:</b> 500 × 600
<b>36. Drain filter:</b> Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste		<b>47. Display type:</b> LCD multifunction display
<b>37. Thermostop:</b> Yes		<b>48. USB port:</b> Yes, for Firmware actualisation
38. Boiler thermostat adjust: Yes		<b>49. Drain pump:</b> Yes

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

50. Self-diagnostics:

Yes



#### Technical parameters

Pot and pan washer double skin with drain pump 50x60 - 400 V		
Model	SAP Code	00011965
S 97 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>51. Wash pump type:</b> two-way - DuoFlow		<b>62. Program ProEco:</b> Yes
<b>52. Detergent dispenser:</b> Yes		<b>63. Program ProLong:</b> Yes
53. Rinse aid dispenser: Yes		64. Program ProPlates:  Yes
<b>54.</b> Water consumption of the washing cycle [l/basket]: 2,4		<b>65. Program ProActive 5:</b> Yes
<b>55. Program ProFessional 2:</b> Yes		<b>66. Program ProActive 7:</b> Yes
<b>56. Program ProFessional 4:</b> Yes		67. Program ProSteel:  Yes
<b>57. Program ProFessional 6:</b> Yes		<b>68. Program ProSan:</b> Yes
<b>58. Program ProFessional 8:</b> Yes		69. Cross-section of conductors CU [mm²]:
<b>59. Program ProFessional 10:</b> Yes		<b>70. Water supply connection:</b> 3/4"
60. Program ProClean: Yes		<b>71. Diameter nominal:</b> DN 50

**61. Program ProDrain:** 

Yes