

#### **Product features**

Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011967	Power electric [kW]	10.500
Net Width [mm]	720	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	780	Water consumption of the washing cycle [l/basket]	3
Net Height [mm]	1730	Door clear height [mm]	650
Net Weight [kg]	148.00	Rack size [mm]	560 x 630



Technical drawing

Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

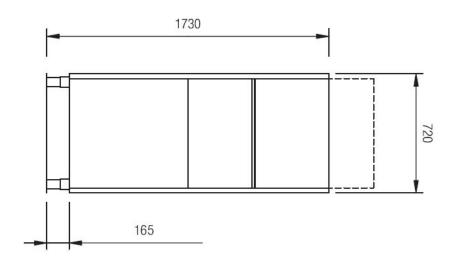

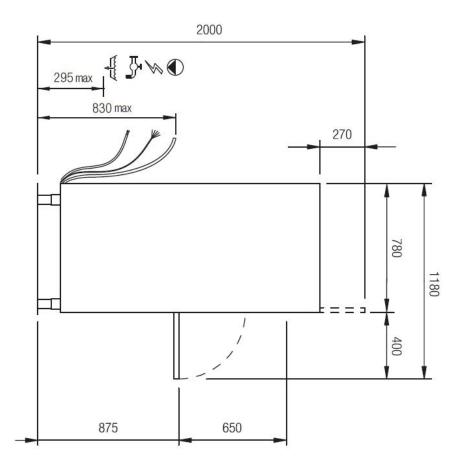





Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

11

#### Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

easy cleaning, high hygiene standard, long service life

2

#### Stainless steel washing arms

upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

easy and safe handling during cleaning; higher user comfort

3

#### **LED Display**

smartScreen, a large color graphic display showing the washing progress

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

#### **Double pump**

unique two-way DuoFlow pump

 distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

#### **Detergent dispensers**

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

6

#### **Double filter system**

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

higher washing efficiency; longer life of the washing bath

7

#### **Energy saving**

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

8

#### **Protection of fragile dishes**

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

9

#### **Double shell construction**

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

10

#### **Fast heating**

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

11

#### Air break tank

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization



### Technical parameters

Pot and pan washer double ski	n with drain pump 55x(	61 - 400 V
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>1. SAP Code:</b> 00011967		<b>15. Number of programs:</b>
<b>2. Net Width [mm]:</b> 720		<b>16. Opening of device:</b> Tilting down
3. Net Depth [mm]: 780		17. Door clear height [mm]: 650
4. Net Height [mm]: 1730		18. Inlet pressure [bar]: 2-4
5. Net Weight [kg]: 148.00		19. Adjustable feet: Yes
<b>6. Gross Width [mm]:</b> 870		20. Number of skin:
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Number of arms for both rinsing and washing:
9. Gross Weight [kg]: 157.00		23. Arm connection: Click-clack - easy removal with one hand
<b>10. Device type:</b> Electric unit		24. Washing arm type: Rotating trident
11. Control type: Digital		25. Washing arm material: Composite
<b>12. Material:</b> AISI 304		26. Atmospheric boiler with rinse pump: Yes
13. Power electric [kW]: 10.500		27. Rinsing arm type: Rotating trident
14. Loading:		28. Rinsing arm material:

400 V / 3N - 50 Hz

Composite



### Technical parameters

Pot and pan washer double skin wi	th drain pump 55x61 -	400 V
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>29. Deep drawn tank:</b> Yes		<b>40. Hot water electric valve:</b> Yes
30. Rack support: Pressed		<b>41. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
31. Tank surface strainers: stainless steel		<b>42. Rack size [mm]:</b> 560 x 630
<b>32. Drain filter:</b> Evolution3 - double filtration with elepartial discharge before the rinsing pof clean water to waste		<b>43. Display type:</b> LCD multifunction display
33. Thermostop: Yes		<b>44. USB port:</b> Yes, for Firmware actualisation
<b>34. Boiler thermostat adjust:</b> Yes		<b>45. Drain pump:</b> Yes
<b>35. Detergent and rinse pump system:</b> ProDose - accurate dosing with a peristaltic pump		<b>46. Self-diagnostics:</b> Yes
<b>36. Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the boiler temperature		<b>47. Wash pump type:</b> two-way - DuoFlow
37. Rinse system:  ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure		<b>48. Detergent dispenser:</b> Yes
38. Heating system:  HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle		<b>49. Rinse aid dispenser:</b> Yes

50. Water consumption of the washing cycle [l/basket]:

39. Quick heating system:

QuickReady - System for rapid heating of water in the tank

3



### Technical parameters

Pot and pan washer double skin with drain pump 55x61 - 400 V		
Model	SAP Code	00011967
S 107 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>51. Rinse water temperature [°C]:</b> 80-85		<b>59. Program ProEco:</b> Yes
<b>52. Program ProFessional 2:</b> Yes		<b>60. Program ProLong:</b> Yes
53. Program ProFessional 4: Yes		<b>61. Program ProActive 5:</b> Yes
<b>54. Program ProFessional 6:</b> Yes		<b>62. Program ProActive 7:</b> Yes
55. Program ProFessional 8: Yes		<b>63. Cross-section of conductors CU [mm²]:</b> 2,5
<b>56. Program ProFessional 10:</b> Yes		<b>64. Water supply connection:</b> 3/4"
<b>57. Program ProClean:</b> Yes		<b>65. Diameter nominal:</b> DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

58. Program ProDrain:

Yes