

# Technical data sheet



## Product features

### Electric fryer 0,75 kW/l, 8 l without cabinet 400 V

<b>Model</b>	<b>SAP Code</b>	00000950
--------------	-----------------	----------



- Basin volume [l]: 8
- Drain type: On the front panel
- Drain: Yes
- Maximum device temperature [°C]: 190
- Minimum device temperature [°C]: 50
- Material: Stainless steel
- Heating location: Inside the tank
- Ignition: Electric
- Number of baskets: 1
- Basket size [mm]: 210 x 235 x 100

<b>SAP Code</b>	00000950	<b>Power electric [kW]</b>	6.000
<b>Net Width [mm]</b>	328	<b>Loading</b>	400 V / 3N - 50 Hz
<b>Net Depth [mm]</b>	609	<b>Basin volume [l]</b>	8
<b>Net Height [mm]</b>	290	<b>Number of baskets</b>	1
<b>Net Weight [kg]</b>	8.00	<b>Basket size [mm]</b>	210 x 235 x 100

# Technical data sheet




Technical drawing

Electric fryer 0,75 kW/l, 8 l without cabinet 400 V

Model

SAP Code

00000950

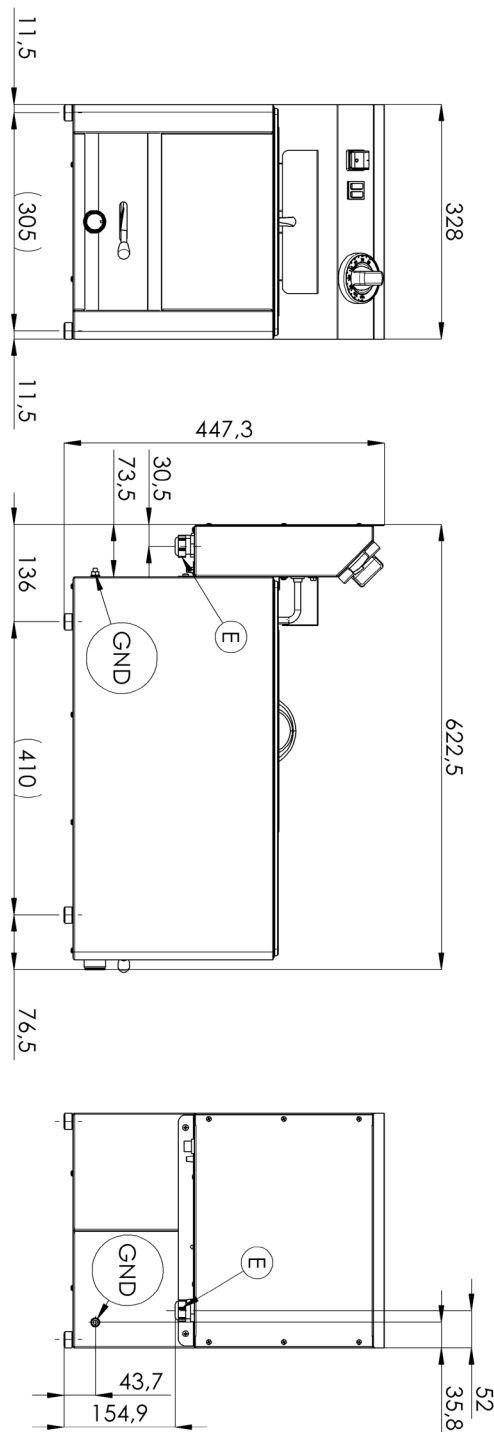

### Electric fryer 0,75 kW/l, 8 l without cabinet 400 V

Model

SAP Code

00000950

1

#### All-stainless steel bathtub

long life  
resistance of AISI 304 stainless steel material  
the material does not cut

- savings on service interventions
- easy cleaning and maintenance of equipment

2

#### Degree of protection of the control elements IPX4

maintenance-free system  
resistance to splash water  
long life

- savings on service interventions
- easy cleaning and maintenance of equipment

3

#### Drain valve 3/4" in the front part of the device with a safety lock against self-draining

outlet of the bath into the prepared container

- easy and safe handling

4

#### Cold zone

prevents food residues from burning  
there is no change in the taste of the oil

- longer oil life
- easy access and maintenance

5

#### Removable heating element

prevents food residues from burning  
there is no change in the taste of the oil

- fully removable electric box with heating element for convenient cleaning and servicing
- easy access even to corners and time saving

6

#### Higher rear chimney

prevention of spontaneous combustion

- safer heat dissipation and separation of oil and ventilation from the fryer

7

#### 2 thermostats

safety and working thermostat

- traffic safety
- prevention of spontaneous combustion
- Prevention of oil flashover

# Technical data sheet



## Technical parameters

### Electric fryer 0,75 kW/l, 8 l without cabinet 400 V

**Model**

**SAP Code**

00000950

**1. SAP Code:**

00000950

**2. Net Width [mm]:**

328

**3. Net Depth [mm]:**

609

**4. Net Height [mm]:**

290

**5. Net Weight [kg]:**

8.00

**6. Gross Width [mm]:**

650

**7. Gross depth [mm]:**

366

**8. Gross Height [mm]:**

440

**9. Gross Weight [kg]:**

9.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Table top

**12. Power electric [kW]:**

6.000

**13. Loading:**

400 V / 3N - 50 Hz

**14. Ignition:**

Electric

**15. Protection of controls:**

IPX4

**16. Material:**

Stainless steel

**17. Indicators:**

operation and warm-up

**18. Worktop material:**

AISI 304

**19. Worktop Thickness [mm]:**

0.80

**20. Standard equipment for device:**

lid, basket, drain plug

**21. Basin volume [l]:**

8

**22. Maximum device temperature [°C]:**

190

**23. Minimum device temperature [°C]:**

50

**24. Safety thermostat up to x ° C:**

235

**25. Adjustable feet:**

Yes

**26. Heating element material:**

AISI 304

**27. Number of baskets:**

1

**28. Basket size [mm]:**

210 x 235 x 100

# Technical data sheet



Technical parameters

## Electric fryer 0,75 kW/l, 8 l without cabinet 400 V

Model

SAP Code

00000950

### 29. Heating element construction:

Large surface area coiled heating element for extended service life and even heating of the oil bath

### 32. Heating location:

Inside the tank

### 30. Drain type:

On the front panel

### 33. Cross-section of conductors CU [mm<sup>2</sup>]:

1

- Výkon (kW): 3,7-5 (230 V); 6,4-8,7 (400 V)

### 31. Drain:

Yes