

# Technical data sheet

## Product features



### Blast chiller/freezer 15x GN 1/1 TouchScreen stainless steel 400 V

<b>Model</b>	<b>SAP Code</b>	00008781
--------------	-----------------	----------



- Shock cooling cycle kg / min (+3 ° C): 70/90
- Shock freeze cycle kg / min (-18 ° C): 50/240
- Maximum device temperature [°C]: -40
- Probe: 4-points
- Insulation thickness [mm]: 80
- Control type: Touchscreen
- Display size: 9"
- User programmable cycles: Yes, with save options
- Thaving cycle: Yes

<b>SAP Code</b>	00008781	<b>Number of GN / EN</b>	15
<b>Net Width [mm]</b>	790	<b>GN / EN size in device</b>	GN 1/1
<b>Net Depth [mm]</b>	839	<b>GN device depth</b>	65
<b>Net Height [mm]</b>	1990	<b>Shock cooling cycle kg / min (+3 ° C)</b>	70/90
<b>Net Weight [kg]</b>	225.00	<b>Shock freeze cycle kg / min (-18 ° C)</b>	50/240
<b>Power electric [kW]</b>	2.390	<b>Control type</b>	Touchscreen
<b>Loading</b>	400 V / 3N - 50 Hz		

# Technical data sheet

Technical drawing




Blast chiller/freezer 15x GN 1/1 TouchScreen stainless steel 400 V

Model

SAP Code

00008781

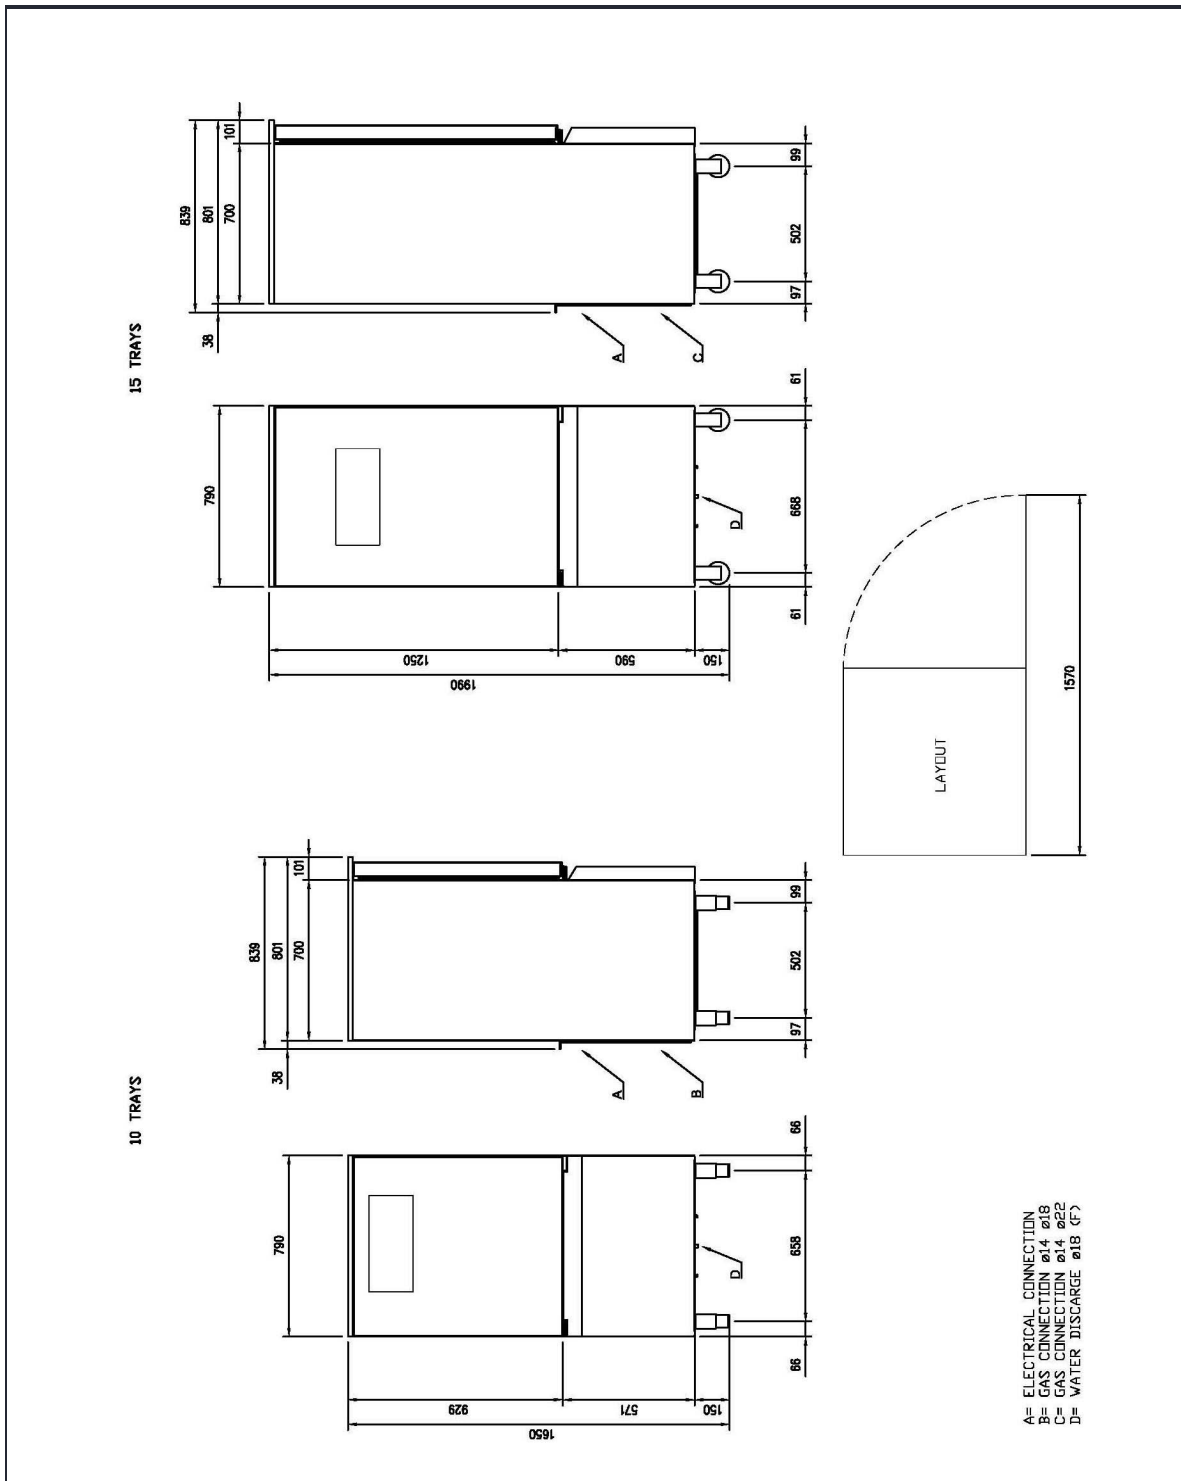

# Technical data sheet

Product benefits



## Blast chiller/freezer 15x GN 1/1 TouchScreen stainless steel 400 V

<b>Model</b>	<b>SAP Code</b>	00008781
--------------	-----------------	----------

**1**

### **Stainless steel body and interior**

endurance  
hygiene

- thanks to the all stainless steel construction it is very easy to maintain and thus saves costs
- meeting hygiene standards

**2**

### **Monitoring of HACCP parameters**

easy registration of all necessary parameters

- hassle-free proof of proper food handling in the event of an inspection

**3**

### **Multipoint probe**

precise monitoring of the cooling/freezing temperature

- food safety is better ensured thanks to the probe
- saves energy and time by stopping cooling/freezing when temperature is reached

**4**

### **Thawing**

readiness of frozen food for processing on time

- time saving
- controlled food handling

# Technical data sheet

Technical parameters



## Blast chiller/freezer 15x GN 1/1 TouchScreen stainless steel 400 V

**Model**

**SAP Code**

00008781

**1. SAP Code:**

00008781

**2. Net Width [mm]:**

790

**3. Net Depth [mm]:**

839

**4. Net Height [mm]:**

1990

**5. Net Weight [kg]:**

225.00

**6. Gross Width [mm]:**

846

**7. Gross depth [mm]:**

860

**8. Gross Height [mm]:**

2120

**9. Gross Weight [kg]:**

240.30

**10. Device type:**

Electric unit

**11. Material:**

AISI 304

**12. Exterior color of the device:**

Stainless steel

**13. Power electric [kW]:**

2.390

**14. Loading:**

400 V / 3N - 50 Hz

**15. Control type:**

Touchscreen

**16. Display size:**

9"

**17. Refrigerant:**

R452a

**18. Number of GN / EN:**

15

**19. GN / EN size in device:**

GN 1/1

**20. GN device depth:**

65

**21. Maximum device temperature [°C]:**

-40

**22. Shock freeze cycle kg / min (-18 ° C):**

50/240

**23. Shock cooling cycle kg / min (+3 ° C):**

70/90

**24. Insulation thickness [mm]:**

80

**25. Long-term cooling function:**

Yes

**26. Longterm freezing function:**

Yes

**27. Probe:**

4-points

**28. Self-diagnostics:**

Yes

# Technical data sheet

Technical parameters



## Blast chiller/freezer 15x GN 1/1 TouchScreen stainless steel 400 V

<b>Model</b>	<b>SAP Code</b>	00008781
--------------	-----------------	----------

### 29. Interior lighting:

Yes

---

### 30. HACCP:

Yes

---

### 31. Filter:

Removable

---

### 32. Thaving cycle:

Yes

---

### 33. User programmable cycles:

Yes, with save options

### 34. USB port:

Yes, for HACCP and firmware update

---

### 35. Castors:

Yes

---

### 36. Real time monitoring paramaters:

Energy consumption, Chamber temperature, Probe temperature, Graph with the course of temperature and consumption

---

### 37. Cross-section of conductors CU [mm<sup>2</sup>]:

1

- Výkon (kW): 3,7-5 (230 V); 6,4-8,7 (400 V)