

Product features

Undercounter dishwasher single skin with drain pump 50x50 - 230 V

Model SAP Code 00011281



- Display type: 3 local display + diode bar
- Number of programs: 6
- Number of skin: 1
- Door clear height [mm]: 365
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,1
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011281	Boiler power [kW]	3.000
Net Width [mm]	575	Basin volume [l]	20
Net Depth [mm]	605	Tank power [kW]	2.100
Net Height [mm]	820	Water consumption of the washing cycle [l/basket]	2,1
Net Weight [kg]	55.00	Washing cycle time [s/basket]	60-120-150
Power electric [kW]	3.500	Door clear height [mm]	365
Loading	230 V / 1N - 50 Hz	Rack size [mm]	500 x 500
Boiler capacity [l]	6.00	Noise of device	59,5





Technical drawing

Undercounter dishwasher single skin with drain pump 50x50 - 230 V

Model SAP Code

00011281



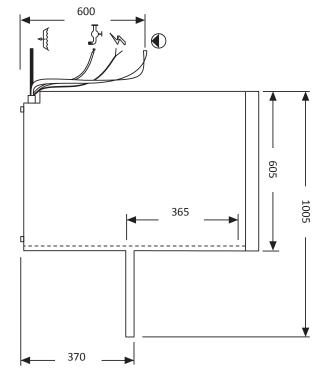



Product benefits

Undercounter dishwasher single skin with drain pump 50x50 - 230 V

Model SAP Code 00011281

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

easy cleaning, high hygiene standard, long service life

Washing arms with a component, common for washing and rinsing

washing arms made of composite material common arm for washing and rinsing integrated screw secured against falling out

easy and safe handling during cleaning; higher user comfort

LED Display

three-line display diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

Double pump

unique two-way DuoFlow pump

 distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving



Technical parameters

Undercounter dishwasher single skin with drain pump 50x50 - 230 V				
Model	SAP Code	00011281		
1. SAP Code: 00011281		15. Number of programs: 6		
2. Net Width [mm]: 575		16. Opening of device: Tilting down		
3. Net Depth [mm]: 605		17. Door clear height [mm]: 365		
4. Net Height [mm]: 820		18. Inlet pressure [bar]: 2-4		
5. Net Weight [kg]: 55.00		19. Adjustable feet: Yes		
6. Gross Width [mm]: 625		20. Number of skin:		
7. Gross depth [mm]: 655		21. Self-cleaning cycle: Yes		
8. Gross Height [mm]:		22. Boiler capacity [l]: 6.00		
9. Gross Weight [kg]: 61.00		23. Boiler power [kW]: 3.000		
10. Device type: Electric unit		24. Basin volume [l]:		
11. Control type: Digital		25. Tank power [kW]: 2.100		
12. Material: AISI 304		26. Arm connection: Hand loosen/tighten screw		
13. Power electric [kW]: 3.500		27. Washing arm type: Rotatable two-pronged		

14. Loading:

230 V / 1N - 50 Hz

28. Washing arm material:

Composite



Technical parameters

Undercounter dishwasher single skin with drain pump 50x50 - 230 V			
Model SAP Code	00011281		
9. Rinsing arm type: Rotating two-pronged	42. Drain pump: Yes		
O. Rinsing arm material: Composite	43. Self-diagnostics: Yes		
1. Rack support: Pressed	44. Wash pump type: two-way - DuoFlow		
2. Tank surface strainers: composite	45. Detergent dispenser: Yes		
3. Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste	46. Rinse aid dispenser: Yes		
4. Thermostop: Yes	47. Water consumption of the washing cycle [l/basket]:		
5. Boiler thermostat adjust: Yes	48. Washing cycle time [s/basket]: 60-120-150		
6. Rack feed capacity: 24-30-60	49. Rinse water temperature [°C]: 80		
77. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump	50. Standard equipment for device: 1x glass basket, 1x plate basket, 1x cutlery basket		
8. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature	51. Program ProSpeed: Yes		
9. Rack size [mm]: 500 × 500	52. Program ProFessional: Yes		
0. Display type: 3 local display + diode bar	53. Program ProTemp: Yes		
1. USB port:	54. Program ProClean:		

Yes, for Firmware actualisation

Yes



Technical parameters

Undercounter dishwasher single skin with drain pump 50x50 - 230 V				
Model	SAP Code	00011281		
55. Program ProDrain: Yes		57. Noise of device: 59,5		
56. Program ProLong:				
Yes				