

# Technical data sheet

## Product features



### Food display island heated, dry tub GN 4-1/1 RAL

|               |                                  |                          |
|---------------|----------------------------------|--------------------------|
| <b>Model</b>  | <b>SAP Code</b>                  | 00012221                 |
| TR ORANGE+ 4R | <b>A group of articles - web</b> | Sideboards and showcases |



- Buffet type: ORANGE - heated, dry
- Device properties: Warmed
- Number of GN / EN: 4
- GN / EN size in device: GN 1/1
- GN device depth: 200
- Minimum device temperature [°C]: 60
- Maximum device temperature [°C]: 100

|                            |          |                                        |                    |
|----------------------------|----------|----------------------------------------|--------------------|
| <b>SAP Code</b>            | 00012221 | <b>Loading</b>                         | 230 V / 1N - 50 Hz |
| <b>Net Width [mm]</b>      | 1494     | <b>Number of GN / EN</b>               | 4                  |
| <b>Net Depth [mm]</b>      | 650      | <b>GN / EN size in device</b>          | GN 1/1             |
| <b>Net Height [mm]</b>     | 1488     | <b>GN device depth</b>                 | 200                |
| <b>Net Weight [kg]</b>     | 125.00   | <b>Minimum device temperature [°C]</b> | 60                 |
| <b>Power electric [kW]</b> | 2.000    | <b>Maximum device temperature [°C]</b> | 100                |

# Technical data sheet



Technical drawing




Food display island heated, dry tub GN 4-1/1 RAL

|               |                                  |                          |
|---------------|----------------------------------|--------------------------|
| <b>Model</b>  | <b>SAP Code</b>                  | 00012221                 |
| TR ORANGE+ 4R | <b>A group of articles - web</b> | Sideboards and showcases |

A= ELECTRICAL CONNECTION  
D= WATER DISCHARGE ø14

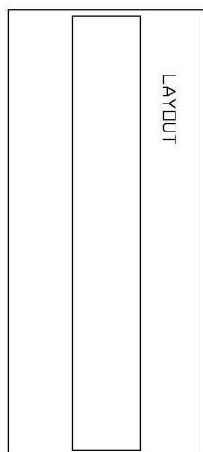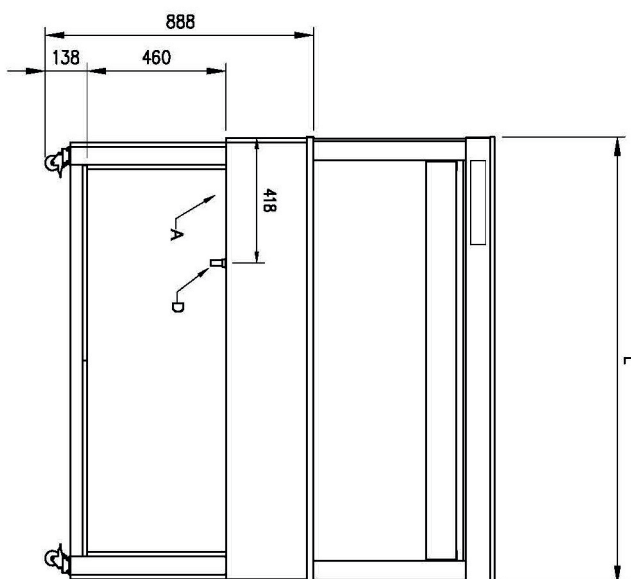

| GN  | L    |
|-----|------|
| 3/1 | 1169 |
| 4/1 | 1494 |
| 6/1 | 2144 |

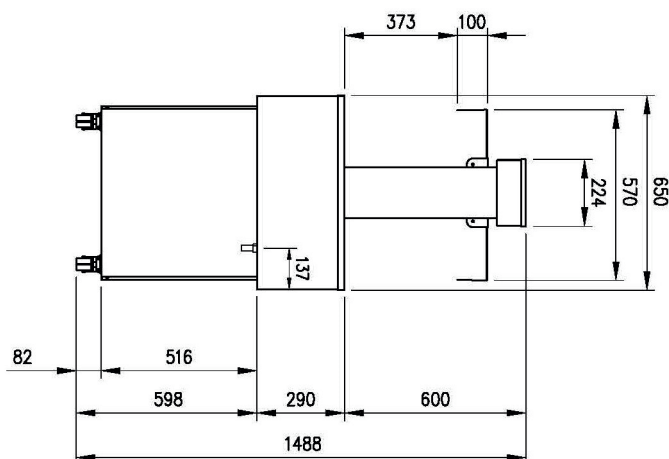

# Technical data sheet

## Product benefits



### Food display island heated, dry tub GN 4-1/1 RAL

|               |                                  |                          |
|---------------|----------------------------------|--------------------------|
| <b>Model</b>  | <b>SAP Code</b>                  | 00012221                 |
| TR ORANGE+ 4R | <b>A group of articles - web</b> | Sideboards and showcases |

1

#### **One large bathtub**

one controller for the whole tub

2

#### **GN insertion up to 200mm**

variability of use

3

#### **Rounded corners**

basins without sharp edges and corners

4

#### **All-stainless steel construction**

harmless to health for contact with food  
robustness

5

#### **Halogen lighting**

heating from above

6

#### **Travel wheels**

portable buffet table

7

#### **Breath galley**

galerka made of hygienic Plexiglas with motorized displacement

# Technical data sheet

## Technical parameters



### Food display island heated, dry tub GN 4-1/1 RAL

|               |                                  |                          |
|---------------|----------------------------------|--------------------------|
| <b>Model</b>  | <b>SAP Code</b>                  | 00012221                 |
| TR ORANGE+ 4R | <b>A group of articles - web</b> | Sideboards and showcases |

**1. SAP Code:**

00012221

**2. Net Width [mm]:**

1494

**3. Net Depth [mm]:**

650

**4. Net Height [mm]:**

1488

**5. Net Weight [kg]:**

125.00

**6. Gross Width [mm]:**

1558

**7. Gross depth [mm]:**

750

**8. Gross Height [mm]:**

1595

**9. Gross Weight [kg]:**

127.30

**10. Device type:**

Electric unit

**11. Material:**

Stainless steel

**12. Buffet type:**

ORANGE - heated, dry

**13. Device properties:**

Warmed

**14. Exterior color of the device:**

RAL

**15. Power electric [kW]:**

2.000

**16. Loading:**

230 V / 1N - 50 Hz

**17. Number of GN / EN:**

4

**18. GN / EN size in device:**

GN 1/1

**19. GN device depth:**

200

**20. Minimum device temperature [°C]:**

60

**21. Maximum device temperature [°C]:**

100

**22. Interior lighting:**

No

**23. Cross-section of conductors CU [mm²]:**

0,5