

# Technical data sheet

## Product features



### Fry-top griddle plate smooth

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00013576                |
| FTLD-88ET    | <b>A group of articles - web</b> | Grills and grill plates |



- Top type: Smooth
- Griddle dimensions [mm x mm]: 800 x 800
- Griddle thickness [mm]: 14.00
- Worktop material: Stainless steel
- Grid size [mm x mm]: 680 x 760
- Container for liquid fat: Yes
- Independent heating zones: Separate control for each heating zone
- Maximum device temperature [°C]: 300
- Removable rim: Yes

|                            |          |                                     |                                           |
|----------------------------|----------|-------------------------------------|-------------------------------------------|
| <b>SAP Code</b>            | 00013576 | <b>Loading</b>                      | 400 V / 3N - 50 Hz                        |
| <b>Net Width [mm]</b>      | 800      | <b>Griddle dimensions [mm x mm]</b> | 800 x 800                                 |
| <b>Net Depth [mm]</b>      | 800      | <b>Grid size [mm x mm]</b>          | 680 x 760                                 |
| <b>Net Height [mm]</b>     | 220      | <b>Top type</b>                     | Smooth                                    |
| <b>Net Weight [kg]</b>     | 80.00    | <b>Worktop type</b>                 | Molded - comfortable cleaning maintenance |
| <b>Power electric [kW]</b> | 15.000   |                                     |                                           |

# Technical data sheet

Technical drawing



## Fry-top griddle plate smooth

Model


SAP Code

00013576

FTLD-88ET

A group of  
articles - web

Grills and grill plates

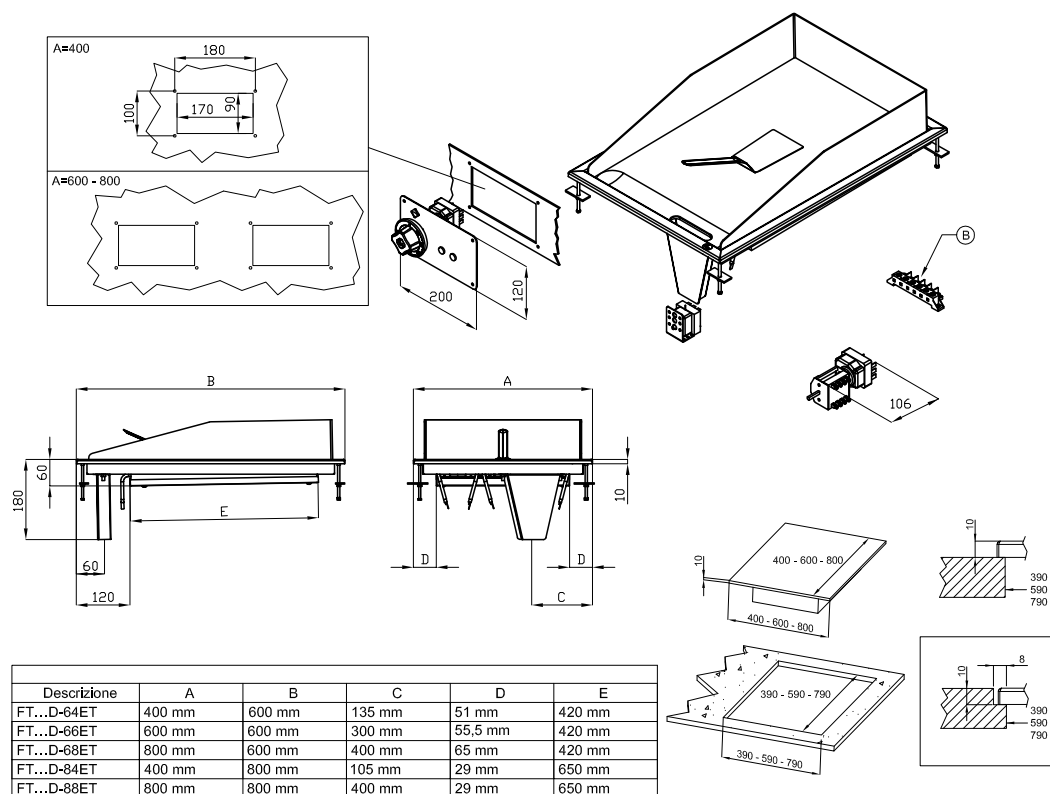

|   |            |  |   |                       |  |
|---|------------|--|---|-----------------------|--|
| A | Data plate |  | B | Electrical connection |  |
|---|------------|--|---|-----------------------|--|

# Technical data sheet

## Technical parameters



### Fry-top griddle plate smooth

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00013576                |
| FTLD-88ET    | <b>A group of articles - web</b> | Grills and grill plates |

**1. SAP Code:**

00013576

**2. Net Width [mm]:**

800

**3. Net Depth [mm]:**

800

**4. Net Height [mm]:**

220

**5. Net Weight [kg]:**

80.00

**6. Gross Width [mm]:**

830

**7. Gross depth [mm]:**

970

**8. Gross Height [mm]:**

540

**9. Gross Weight [kg]:**

90.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Drop-in

**12. Power electric [kW]:**

15.000

**13. Loading:**

400 V / 3N - 50 Hz

**14. Protection of controls:**

IPX5

**15. Exterior color of the device:**

Stainless steel

**16. Material:**

Stainless steel

**17. Indicators:**

operation and warm-up

**18. Worktop type:**

Molded - comfortable cleaning maintenance

**19. Worktop material:**

Stainless steel

**20. Worktop Thickness [mm]:**

14.00

**21. Standard equipment for device:**

comes with a stainless steel scraper for cleaning pastries

**22. Maximum device temperature [°C]:**

300

**23. Minimum device temperature [°C]:**

50

**24. Service accessibility:**

Trough the frontal panel

**25. Safety thermostat:**

Yes

**26. Griddle dimensions [mm x mm]:**

800 x 800

**27. Griddle thickness [mm]:**

14.00

**28. Container for liquid fat:**

Yes

# Technical data sheet

Technical parameters



## Fry-top griddle plate smooth

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00013576                |
| FTLD-88ET    | <b>A group of articles - web</b> | Grills and grill plates |

### 29. Independent heating zones:

Separate control for each heating zone

### 32. Top type:

Smooth

### 30. Removable rim:

Yes

### 33. Cross-section of conductors CU [mm<sup>2</sup>]:

4

### 31. Grid size [mm x mm]:

680 x 760