

Technical data sheet

Product features



Undercounter dishwasher single skin with drain pump 39x39 - 230 V

Model	SAP Code	00011280
-------	----------	----------



- Display type: 3 local display + diode bar
- Number of programs: 5
- Number of skin: 1
- Door clear height [mm]: 320
- Rack size [mm]: 390 x 390
- Water consumption of the washing cycle [l/basket]: 1,6
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011280	Boiler power [kW]	2.600
Net Width [mm]	436	Basin volume [l]	8
Net Depth [mm]	535	Tank power [kW]	0.600
Net Height [mm]	670	Water consumption of the washing cycle [l/basket]	1,6
Net Weight [kg]	32.00	Washing cycle time [s/basket]	60-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	390 x 390
Boiler capacity [l]	2.60	Noise of device	61,5

Technical data sheet

Technical drawing





Undercounter dishwasher single skin with drain pump 39x39 - 230 V

Model

SAP Code

00011280

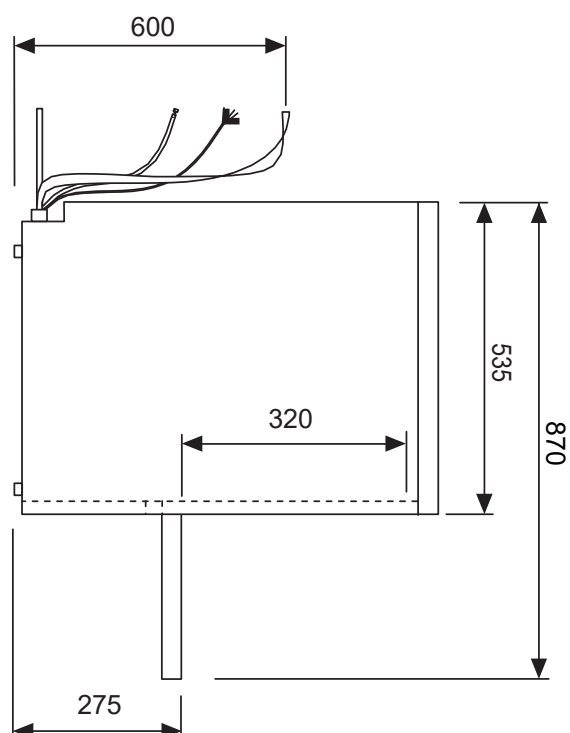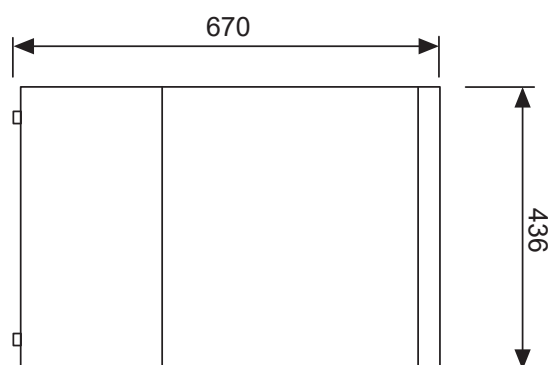

Technical data sheet



Product benefits

Undercounter dishwasher single skin with drain pump 39x39 - 230 V

Model

SAP Code

00011280

1

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

- easy cleaning, high hygiene standard, long service life

2

Washing arms with a component, common for washing and rinsing

washing arms made of composite material
common arm for washing and rinsing
integrated screw secured against falling out

- easy and safe handling during cleaning; higher user comfort

3

LED Display

three-line display
diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

6

Detergent dispensers

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

8

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving

Technical data sheet

Technical parameters



Undercounter dishwasher single skin with drain pump 39x39 - 230 V

Model

SAP Code

00011280

1. SAP Code:

00011280

2. Net Width [mm]:

436

3. Net Depth [mm]:

535

4. Net Height [mm]:

670

5. Net Weight [kg]:

32.00

6. Gross Width [mm]:

486

7. Gross depth [mm]:

585

8. Gross Height [mm]:

720

9. Gross Weight [kg]:

35.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

AISI 304

13. Power electric [kW]:

3.500

14. Loading:

230 V / 1N - 50 Hz

15. Number of programs:

5

16. Opening of device:

Tilting down

17. Door clear height [mm]:

320

18. Inlet pressure [bar]:

2-4

19. Adjustable feet:

Yes

20. Number of skin:

1

21. Self-cleaning cycle:

Yes

22. Boiler capacity [l]:

2.60

23. Boiler power [kW]:

2.600

24. Basin volume [l]:

8

25. Tank power [kW]:

0.600

26. Number of arms for both rinsing and washing:

2

27. Arm connection:

Hand loosen/tighten screw

28. Washing arm type:

Rotatable two-pronged

Technical data sheet

Technical parameters



Undercounter dishwasher single skin with drain pump 39x39 - 230 V

Model	SAP Code	00011280
-------	----------	----------

29. Washing arm material:

Composite

30. Rinsing arm type:

Rotating two-pronged

31. Rinsing arm material:

Composite

32. Rack support:

Pressed

33. Tank surface strainers:

composite

34. Drain filter:

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

35. Thermostop:

Yes

36. Boiler thermostat adjust:

Yes

37. Rack feed capacity:

24-30-60

38. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

39. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

40. Hot water electric valve:

Yes

41. Rack size [mm]:

390 x 390

42. Display type:

3 local display + diode bar

43. USB port:

Yes, for Firmware actualisation

44. Drain pump:

Yes

45. Self-diagnostics:

Yes

46. Wash pump type:

two-way - DuoFlow

47. Detergent dispenser:

Yes

48. Rinse aid dispenser:

Yes

49. Water consumption of the washing cycle [l/basket]:

1,6

50. Washing cycle time [s/basket]:

60-120-150

51. Rinse water temperature [°C]:

65

52. Standard equipment for device:

2x glass basket, 1x cutlery basket

53. Program ProSpeed:

Yes

54. Program ProFessional:

Yes

Technical data sheet

Technical parameters



Undercounter dishwasher single skin with drain pump 39x39 - 230 V

Model

SAP Code

00011280

55. Program ProTemp:

Yes

56. Program ProClean:

Yes

57. Program ProDrain:

Yes

58. Noise of device:

61,5

59. Cross-section of conductors CU [mm²]:

1

60. Water supply connection:

3/4"

61. Diameter nominal:

DN 50