

Technical data sheet

Product features



Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V

Model	SAP Code	00011968
--------------	-----------------	----------



- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

SAP Code	00011968	Power electric [kW]	10.500
Net Width [mm]	782	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	719	Water consumption of the washing cycle [l/basket]	3
Net Height [mm]	1956	Door clear height [mm]	650
Net Weight [kg]	174.00	Rack size [mm]	560 x 630

Technical data sheet

Technical drawing




Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V

Model

SAP Code

00011968

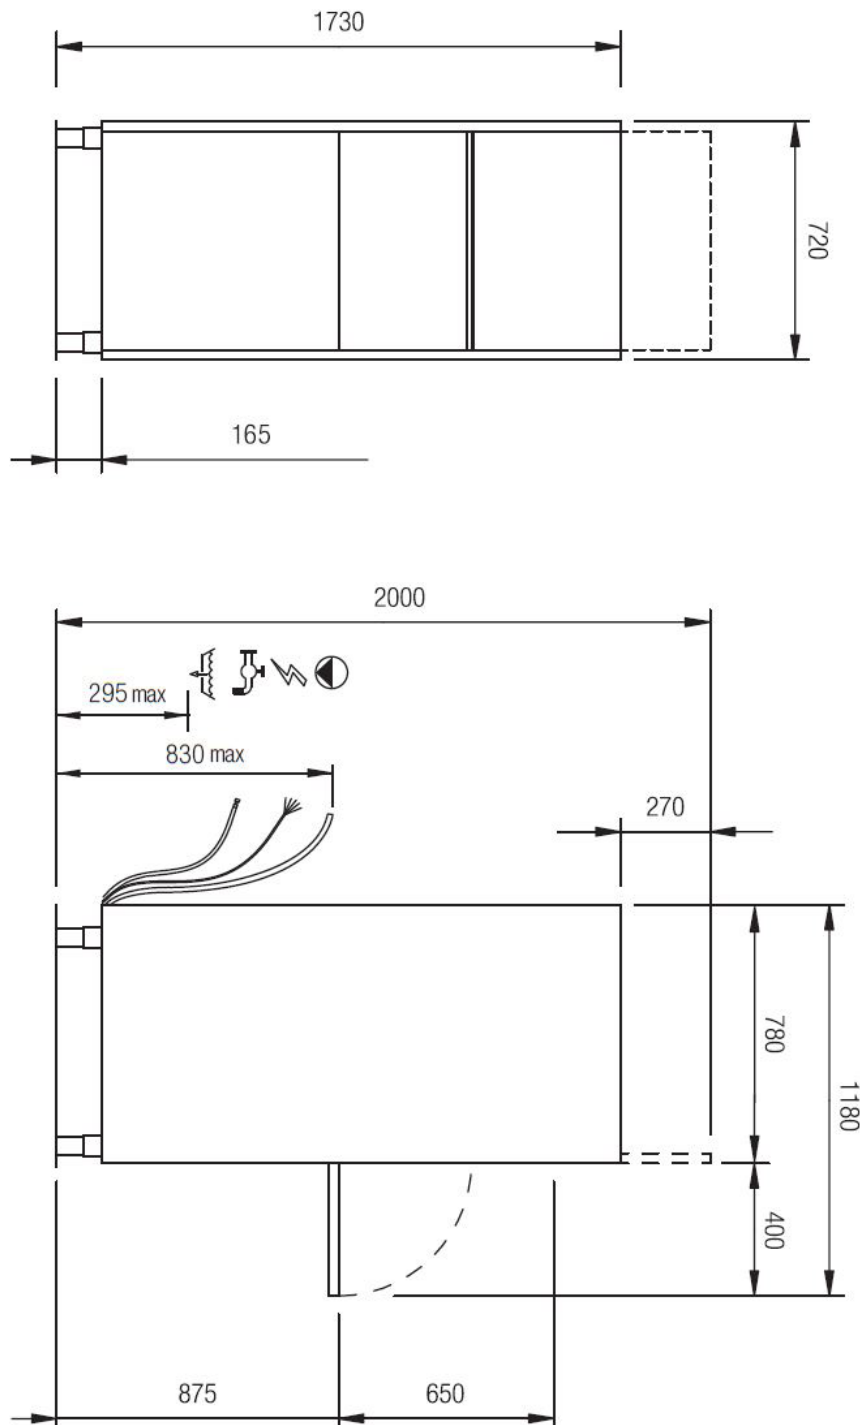

Technical data sheet

Product benefits



Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V

Model	SAP Code	00011968
-------	----------	----------

- 1 Stainless steel outer shell construction**
round construction with stainless steel, rounded edges, Deep-drawn bathtub
 - easy cleaning, high hygiene standard, long service life
- 2 Stainless steel washing arms**
upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm
 - easy and safe handling during cleaning; higher user comfort
- 3 LED Display**
smartScreen, a large color graphic display showing the washing progress
 - easy control of the dishwasher operation
 - continuous information on the status of the wash cycle
 - diagnostics in the event of a fault
- 4 Double pump**
unique two-way DuoFlow pump
 - distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- 5 Detergent dispensers**
two detergent and rinse aid dispensers
 - precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- 6 Double filter system**
the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
 - higher washing efficiency; longer life of the washing bath
- 7 Energy saving**
energy saving energy saving system due to lowering the temperature of the boiler
 - cost saving
- 8 Protection of fragile dishes**
softstart system for gradual start of washing programs to protect fragile dishes
 - protects stemmed glasses and other fragile utensils
- 9 Double shell construction**
stainless steel construction with insulated double jacket
 - quiet operation
 - energy saving
- 10 Fast heating**
performance management allows the current running of the boiler and basins body
 - quick first warm-up of the dishwasher
 - smooth operation
- 11 Air break tank**
the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse
 - possibility to use in HACCP systems water temperature suitable for sterilization
- 12 Possibility of recovery**
saving up to 40% of boiler energy improves the comfort environment of the workplace environment without steam saves water
 - saving on energy and water costs; environmentally friendly system; safe system; pleasant workplace

Technical data sheet

Technical parameters



Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V

Model

SAP Code

00011968

1. SAP Code:

00011968

2. Net Width [mm]:

782

3. Net Depth [mm]:

719

4. Net Height [mm]:

1956

5. Net Weight [kg]:

174.00

6. Gross Width [mm]:

870

7. Gross depth [mm]:

890

8. Gross Height [mm]:

2200

9. Gross Weight [kg]:

183.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

AISI 304

13. Power electric [kW]:

10.500

14. Loading:

400 V / 3N - 50 Hz

15. Number of programs:

11

16. Opening of device:

Tilting down

17. Door clear height [mm]:

650

18. Inlet pressure [bar]:

2-4

19. Adjustable feet:

Yes

20. Number of skin:

2

21. Self-cleaning cycle:

Yes

22. Number of arms for both rinsing and washing:

2

23. Arm connection:

Click-clack - easy removal with one hand

24. Washing arm type:

Rotating trident

25. Washing arm material:

Composite

26. Atmospheric boiler with rinse pump:

Yes

27. Rinsing arm type:

Rotating trident

28. Rinsing arm material:

Composite

Technical data sheet

Technical parameters



Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V

Model

SAP Code

00011968

29. Deep drawn tank:

Yes

30. Rack support:

Pressed

31. Tank surface strainers:

stainless steel

32. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

33. Thermostop:

Yes

34. Boiler thermostat adjust:

Yes

35. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

36. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

37. Rinse system:

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

38. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

49. Detergent dispenser:

Yes

39. Quick heating system:

QuickReady - System for rapid heating of water in the tank

40. Heat recovery:

1 copper-aluminum battery - saving up to 40% of the energy needed to heat the water in the boiler, at the same time, by absorbing the released steam, it eliminates the need to use a hood

41. Hot water electric valve:

Yes

42. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

43. Rack size [mm]:

560 x 630

44. Display type:

LCD multifunction display

45. USB port:

Yes, for Firmware actualisation

46. Drain pump:

Yes

47. Self-diagnostics:

Yes

48. Wash pump type:

two-way - DuoFlow

57. Program ProFessional 10:

Yes

Technical data sheet

Technical parameters



Pot and pan washer double skin with drain pump heat recovery system 55x61 - 400 V

Model

SAP Code

00011968

50. Rinse aid dispenser:

Yes

58. Program ProClean:

Yes

51. Water consumption of the washing cycle [l/basket]:

3

59. Program ProDrain:

Yes

52. Additional information:

The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free

60. Program ProEco:

Yes

53. Program ProFessional 2:

Yes

61. Program ProLong:

Yes

54. Program ProFessional 4:

Yes

62. Program ProActive 5:

Yes

55. Program ProFessional 6:

Yes

63. Program ProActive 7:

Yes

56. Program ProFessional 8:

Yes