

Technical data sheet

Product features



Chilled display unit GN 4-1/1 bottom cover, opening to the sides, Hemlock

Model	SAP Code	00012141
ES PLATINUM+ 4H DS	A group of articles - web	Sideboards and showcases




- Buffet type: PLATINUM - dynamically cooled showcase
- Device properties: Chilled
- Number of GN / EN: 4
- GN / EN size in device: GN 1/1
- GN device depth: 200
- Minimum device temperature [°C]: 4
- Maximum device temperature [°C]: 8

SAP Code	00012141	Loading	230 V / 1N - 50 Hz
Net Width [mm]	1494	Number of GN / EN	4
Net Depth [mm]	760	GN / EN size in device	GN 1/1
Net Height [mm]	1688	GN device depth	200
Net Weight [kg]	183.00	Minimum device temperature [°C]	4
Power electric [kW]	0.494	Maximum device temperature [°C]	8

Chilled display unit GN 4-1/1 bottom cover, opening to the sides, Hemlock

Model	SAP Code	00012141
ES PLATINUM+ 4H DS	A group of articles - web	Sideboards and showcases

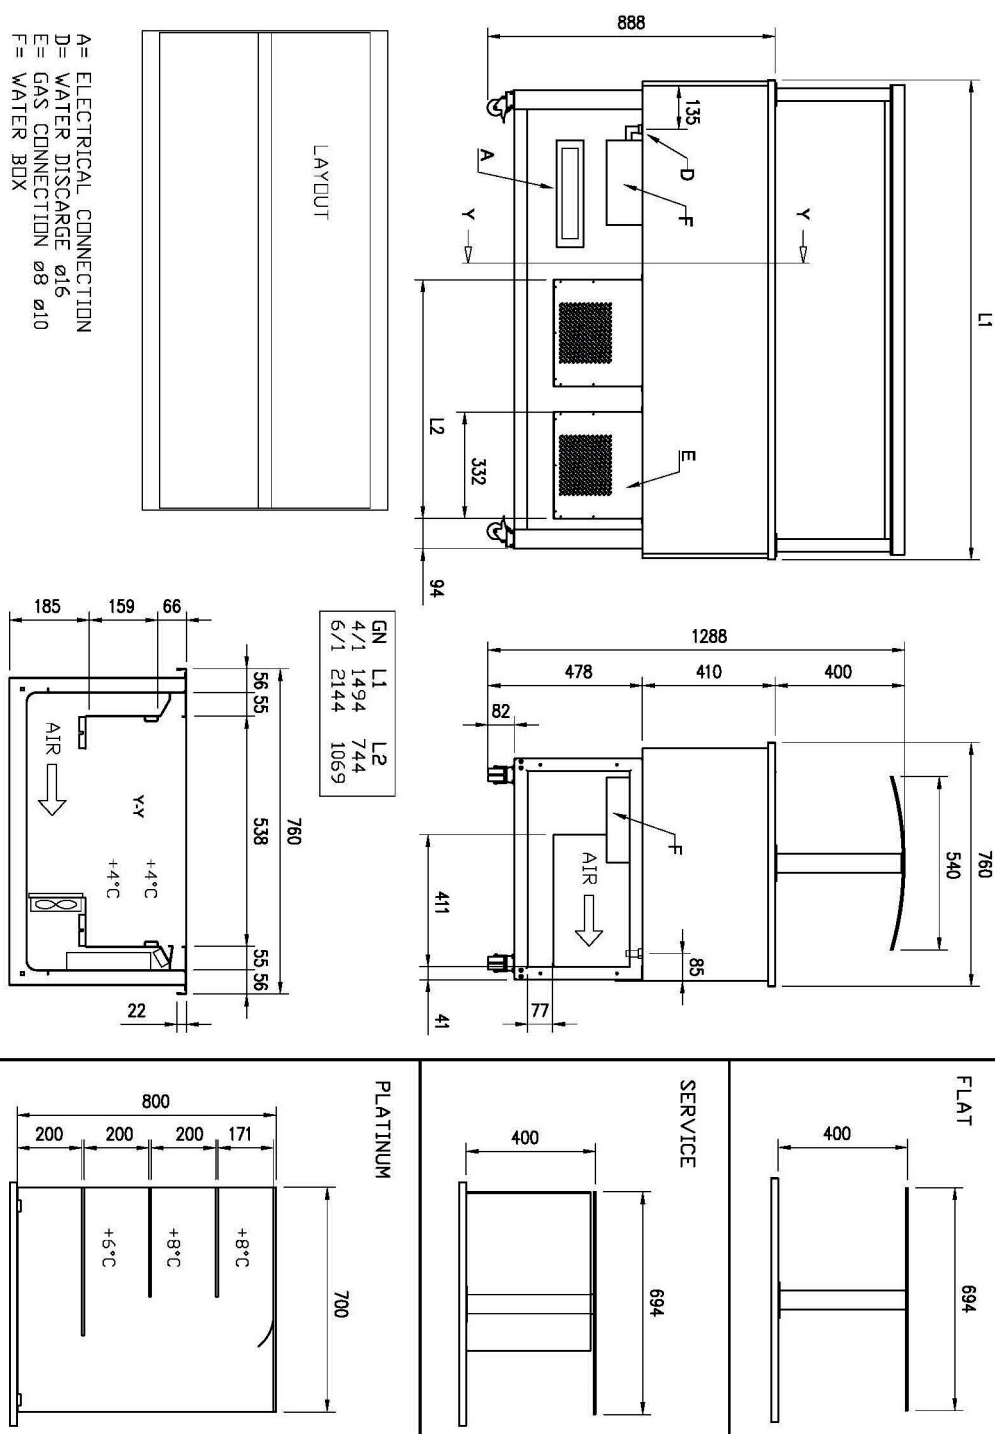

Technical data sheet

Product benefits



Chilled display unit GN 4-1/1 bottom cover, opening to the sides, Hemlock

Model	SAP Code	00012141
ES PLATINUM+ 4H DS	A group of articles - web	Sideboards and showcases

1

Dynamic cooling

constant temperature in all places of the refrigerated space

2

LED lighting

minimal energy consumption

3

Surface height regulation

a large range of the height of the bottom surface of the display case

4

Braked travel wheels

easy handling

Technical data sheet

Technical parameters



Chilled display unit GN 4-1/1 bottom cover, opening to the sides, Hemlock

Model	SAP Code	00012141
ES PLATINUM+ 4H DS	A group of articles - web	Sideboards and showcases

1. SAP Code:

00012141

2. Net Width [mm]:

1494

3. Net Depth [mm]:

760

4. Net Height [mm]:

1688

5. Net Weight [kg]:

183.00

6. Gross Width [mm]:

1558

7. Gross depth [mm]:

860

8. Gross Height [mm]:

1830

9. Gross Weight [kg]:

240.70

10. Device type:

Electric unit

11. Buffet type:

PLATINUM - dynamically cooled showcase

12. Device properties:

Chilled

13. Exterior color of the device:

Hemlock

14. Power electric [kW]:

0.494

15. Loading:

230 V / 1N - 50 Hz

16. Number of GN / EN:

4

17. GN / EN size in device:

GN 1/1

18. GN device depth:

200

19. Minimum device temperature [°C]:

4

20. Maximum device temperature [°C]:

8

21. Interior lighting:

No

22. Cross-section of conductors CU [mm²]:

0,5

23. Refrigerant:

R290