



Pot and pan washer double skin 132x70 - 400 V		
Model	SAP Code	00011975
S 302 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher




- To the product for free: 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273)
- Display type: LCD multifunction display
- Number of programs: 8
- Number of skin: 2
- Door clear height [mm]: 850
- Rack size [mm]: 1310 x 700
- Water consumption of the washing cycle [l/basket]: 6
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011975	Boiler capacity [ l ]	12.00
Net Width [mm]	1465	Boiler power [kW]	10.500
Net Depth [mm]	850	Basin volume [l]	131
Net Height [mm]	1959	Tank power [kW]	10.500
Net Weight [kg]	301.00	Water consumption of the washing cycle [l/basket]	6
Power electric [kW]	15.900	Door clear height [mm]	850
Loading	400 V / 3N - 50 Hz	Rack size [mm]	1310 x 700



Technical drawing

Pot and pan washer double skin 132x70 - 400 V		
Model	SAP Code	00011975
S 302 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

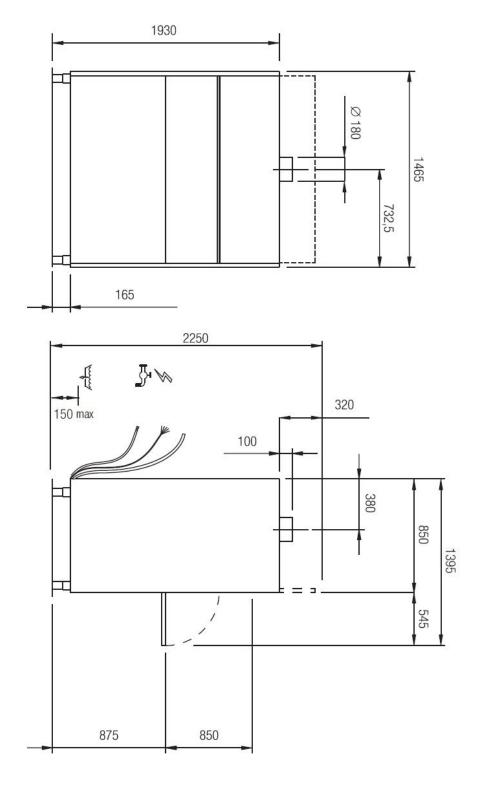





Pot and pan washer double skin 132x70 - 400 V		
Model	SAP Code	00011975
S 302 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction round construction with stainless steel, rounded edges,

round construction with stainless steel, rounded edges, Deep-drawn bathtub

2 Stainless steel washing arms
upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

3 LED Display smartScreen, a large color graphic display showing the washing progress

Double pump
unique two-way DuoFlow pump

Detergent dispensers two detergent and rinse aid dispensers

Double filter system
the chamber filter and the waste filter together with the
ArchiMedes system provide a discharge system with
increased water purification efficiency

Energy saving energy saving system due to lowering the temperature of the boiler

Protection of fragile dishes
softstart system for gradual start of washing programs to protect fragile dishes

**Double shell construction**stainless steel construction with insulated double jacket

Fast heating

performance management allows the current running of the boiler and basins body

11 Air break tank
the open system of the boiler rinse, in cooperation
with the rinse pump, ensures a constant pressure and
temperature of the rinse



#### Technical parameters

Det and non weeker double elvin	122×70 400 V	
Pot and pan washer double skin		
Model	SAP Code	00011975
S 302 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>1. SAP Code:</b> 00011975		15. Number of programs:
2. Net Width [mm]: 1465		<b>16. Opening of device:</b> Tilting down
<b>3. Net Depth [mm]:</b> 850		17. Door clear height [mm]: 850
4. Net Height [mm]: 1959		18. Inlet pressure [bar]:
5. Net Weight [kg]: 301.00		19. Adjustable feet:  Yes
<b>6. Gross Width [mm]:</b> 1630		20. Number of skin:
<b>7. Gross depth [mm]:</b> 980		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2230		<b>22. Boiler capacity [ l ]:</b> 12.00
9. Gross Weight [kg]: 317.00		23. Boiler power [kW]: 10.500
10. Device type:  Electric unit		24. Basin volume [l]:
11. Control type:  Digital		25. Tank power [kW]: 10.500
<b>12. Material:</b> AISI 304		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 15.900		27. Arm connection: Hand loosen/tighten screw
		20 Walliam and burn

28. Washing arm type:

Rotating trident

14. Loading:

400 V / 3N - 50 Hz



#### Technical parameters

Pot and pan washer double skin 1	.32x70 - 400 V	
Model	SAP Code	00011975
S 302 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>29. Washing arm material:</b> Stainless steel		<b>40. Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the boiler temperature
30. Atmospheric boiler with rinse pump: Yes		<b>41. Rinse system:</b> UltraRinse2 - stainless steel rinsing arms including stainless steel nozzles with a geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure
31. Rinsing arm type: Rotating trident		<b>42. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
32. Rinsing arm material: Stainless steel		<b>43. Quick heating system:</b> QuickReady - System for rapid heating of water in the tank
33. Deep drawn tank: Yes		<b>44. Hot water electric valve:</b> Yes
<b>34. Rack support:</b> Pressed		<b>45. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
<b>35. Tank surface strainers:</b> stainless steel		<b>46. Rack size [mm]:</b> 1310 × 700
<b>36. Drain filter:</b> ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste		<b>47. Display type:</b> LCD multifunction display
<b>37. Thermostop:</b> Yes		<b>48. USB port:</b> Yes, for Firmware actualisation
<b>38. Boiler thermostat adjust:</b> Yes		<b>49. Self-diagnostics:</b> Yes

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

50. Wash pump type:

two-way - DuoFlow



#### Technical parameters

58. Program ProFessional 8:

Yes

Pot and pan washer double skin 1	32x70 - 400 V	
Model	SAP Code	00011975
S 302 ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>51. Detergent dispenser:</b> Yes		<b>59. Program ProFessional 10:</b> Yes
<b>52. Rinse aid dispenser:</b> Yes		<b>60. Program ProSelf:</b> Yes
53. Water consumption of the washing cycle [l/basket]:		<b>61. Program ProEco:</b> Yes
<b>54. Rinse water temperature [°C]:</b> 80-85		<b>62. Program ProLong:</b> Yes
<b>55. Program ProFessional 2:</b> Yes		<b>63. Cross-section of conductors CU [mm²]:</b> 5
<b>56. Program ProFessional 4:</b> Yes		<b>64. Water supply connection:</b> 3/4"
<b>57. Program ProFessional 6:</b> Yes		<b>65. Diameter nominal:</b> DN 50

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com