

Technical data sheet

Product features



Bain marie electric

Model

SAP Code

00008929



- Water inlet: automatic valve operated by button
- Drain type: On the front panel
- Safety drain: Yes
- Material: AISI 304 top plate and cladding
- Protection of controls: IP24
- Maximum device temperature [°C]: 90

SAP Code	00008929	Power electric [kW]	1.600
Net Width [mm]	400	Loading	230 V / 1N - 50 Hz
Net Depth [mm]	730	Number of GN / EN	1
Net Height [mm]	300	GN / EN size in device	GN 1/1
Net Weight [kg]	23.00	GN device depth	200

Technical data sheet

Technical drawing




Bain marie electric

Model

SAP Code

00008929

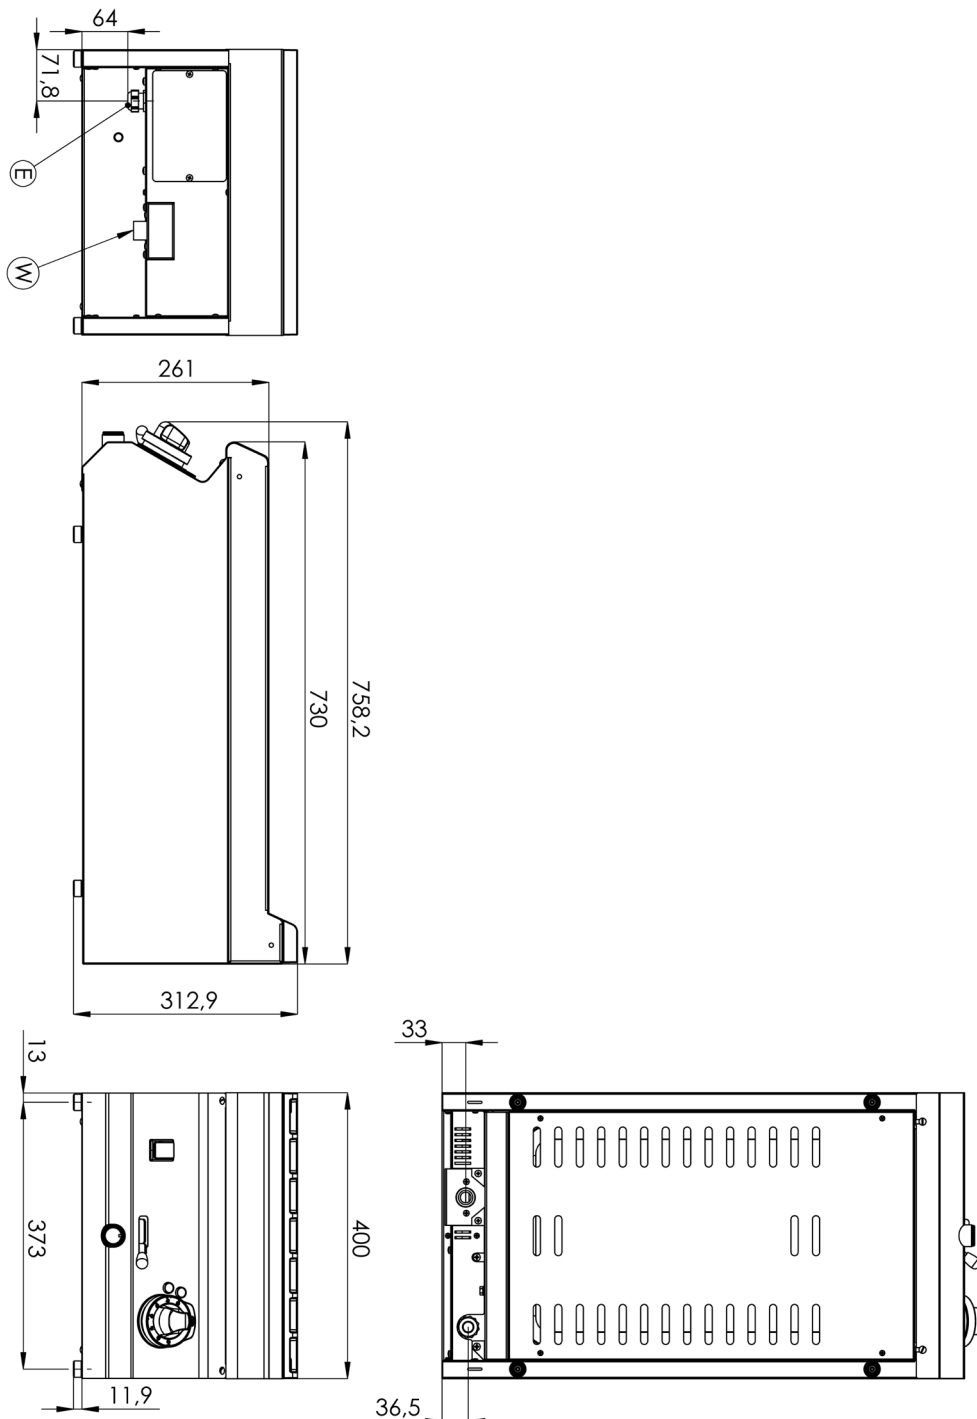

Technical data sheet

Technical parameters



Bain marie electric

Model

SAP Code

00008929

1. SAP Code:

00008929

2. Net Width [mm]:

400

3. Net Depth [mm]:

730

4. Net Height [mm]:

300

5. Net Weight [kg]:

23.00

6. Gross Width [mm]:

440

7. Gross depth [mm]:

800

8. Gross Height [mm]:

480

9. Gross Weight [kg]:

28.00

10. Device type:

Electric unit

11. Construction type of device:

Table top

12. Power electric [kW]:

1.600

13. Loading:

230 V / 1N - 50 Hz

14. Protection of controls:

IP24

15. Exterior color of the device:

Stainless steel

16. Material:

AISI 304 top plate and cladding

17. Indicators:

operation and warm-up

18. Worktop type:

Molded - comfortable cleaning maintenance

19. Worktop material:

AISI 304

20. Worktop Thickness [mm]:

1.50

21. Surface finish:

polished stainless steel

22. Maximum device temperature [°C]:

90

23. Minimum device temperature [°C]:

30

24. Service accessibility:

Trough the frontal panel

25. Safety thermostat:

Yes

26. Number of basins:

1

27. Basin material:

AISI 304 - High quality stainless steel

28. Water inlet:

automatic valve operated by button

Technical data sheet

Technical parameters



Bain marie electric

Model	SAP Code	00008929
-------	----------	----------

29. Drain type:

On the front panel

33. GN device depth:

200

30. Safety drain:

Yes

34. Heating location:

Under the bottom of the bathtub

31. Number of GN / EN:

1

35. Cross-section of conductors CU [mm²]:

0,5

- Výkon (kW): 2,4-3,3 (230 V)

32. GN / EN size in device:

GN 1/1