



Pot and pan washer double skin 55x61 - 400 V

Model SAP Code 00011966




- Display type: LCD multifunction display
- Number of programs: 8
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011966	Power electric [kW]	10.500
Net Width [mm]	782	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	719	Water consumption of the washing cycle [l/basket]	3
Net Height [mm]	1727	Door clear height [mm]	650
Net Weight [kg]	148.00	Rack size [mm]	560 x 630



Technical drawing

Pot and pan washer double skin 55x61 - 400 V			
Model	SAP Code	00011966	

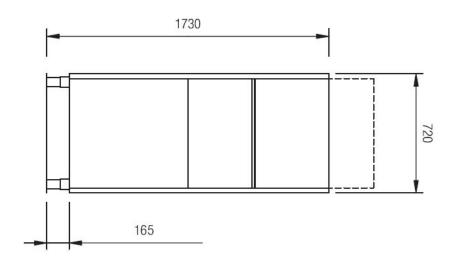

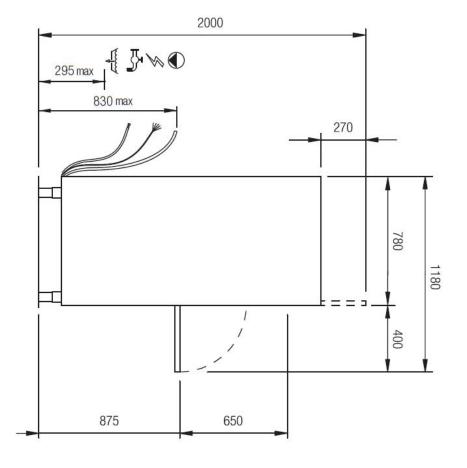





Pot and pan washer double skin 55x61 - 400 V

Model SAP Code 00011966

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

easy cleaning, high hygiene standard, long service life

Stainless steel washing arms

upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

easy and safe handling during cleaning; higher user comfort

LED Display

smartScreen, a large color graphic display showing the washing progress

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

Double pump

unique two-way DuoFlow pump

 distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

Double shell construction

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

Fast heating

10

performance management allows the current running of the boiler and basins body

- guick first warm-up of the dishwasher
- smooth operation

__ Air break tank

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization



Technical parameters

Pot and pan washer double skin 5	55x61 - 400 V	
Model	SAP Code	00011966
1. SAP Code: 00011966		15. Number of programs:
2. Net Width [mm]: 782		16. Opening of device: Tilting down
3. Net Depth [mm]: 719		17. Door clear height [mm]: 650
4. Net Height [mm]:		18. Inlet pressure [bar]:
5. Net Weight [kg]: 148.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 870		20. Number of skin:
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 2200		22. Number of arms for both rinsing and washing:
9. Gross Weight [kg]: 157.00		23. Arm connection: Click-clack - easy removal with one hand
10. Device type: Electric unit		24. Washing arm type: Rotating trident
11. Control type: Digital		25. Washing arm material: Composite
12. Material: AISI 304		26. Atmospheric boiler with rinse pump: Yes
13. Power electric [kW]: 10.500		27. Rinsing arm type: Rotating trident

14. Loading:

400 V / 3N - 50 Hz

28. Rinsing arm material:

Composite



Technical parameters

Pot and pan washer double skin 55x61 - 400 V		
Model	SAP Code	00011966

29. Deep drawn tank:

Yes

30. Rack support:

Pressed

31. Tank surface strainers:

stainless steel

32. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

33. Thermostop:

Yes

34. Boiler thermostat adjust:

Yes

35. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

36. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

37. Rinse system:

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

38. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

39. Quick heating system:

QuickReady - System for rapid heating of water in the tank

40. Hot water electric valve:

Yes

41. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

42. Rack size [mm]:

560 x 630

43. Display type:

LCD multifunction display

44. USB port:

Yes, for Firmware actualisation

45. Self-diagnostics:

Yes

46. Wash pump type:

two-way - DuoFlow

47. Detergent dispenser:

Yes

48. Rinse aid dispenser:

Yes

49. Water consumption of the washing cycle [l/basket]:

3

50. Additional information:

The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free



Technical parameters

Pot and pan washer double skin 55x61 - 400 V				
Model	SAP Code	00011966		
51. Program ProFessional 2:		55. Program ProFessional 10:		
Yes		Yes		
52. Program ProFessional 4:		56. Program ProSelf:		
Yes		Yes		
53. Program ProFessional 6:		57. Program ProEco:		
Yes		Yes		
54. Program ProFessional 8:		58. Program ProLong:		
Yes		Yes		