



Undercounter dishwasher double skin with drain pump 40x40 - 230 V

Model SAP Code 00011285



- Display type: ProScreen 4 digit display + 2 LED bars
- Number of programs: 6
- Number of skin: 2
- Door clear height [mm]: 320
- Rack size [mm]: 400 x 400
- Water consumption of the washing cycle [l/basket]: 1,9
- Washing cycle time [s/basket]: 90-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste


SAP Code	00011285	Boiler power [kW]	2.600
Net Width [mm]	466	Basin volume [l]	8
Net Depth [mm]	556	Tank power [kW]	0.600
Net Height [mm]	695	Water consumption of the washing cycle [l/basket]	1,9
Net Weight [kg]	46.00	Washing cycle time [s/basket]	90-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400
Boiler capacity [ l ]	2.60	Noise of device	54,3



Technical drawing


Undercounter dishwasher double skin with drain pump 40x40 - 230 V

Model SAP Code



00011285



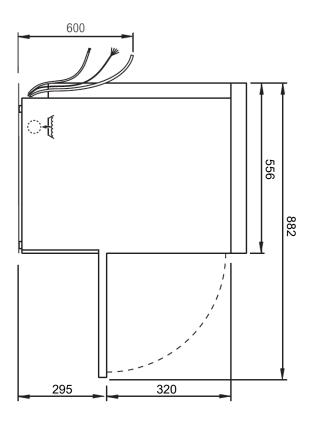





Undercounter dishwasher double skin with drain pump 40x40 - 230 V

Model SAP Code 00011285

### Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort
- LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- **Detergent dispensers**two detergent and rinse aid dispensers

procise chemical design by ProDese pre

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- **Double filter system**the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with

increased water purification efficiency

higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

**Protection of fragile dishes** 

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

**Double shell construction**stainless steel construction with insulated double jacket

- quiet operation
- energy saving

Fast heating

performance management allows the current running of the boiler and basins body  $% \left\{ \left\{ 1\right\} \right\} =\left\{ 1\right\} =\left\{ 1\right\}$ 

- quick first warm-up of the dishwasher
- smooth operation

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

2024-07-30

3



### Technical parameters

Undercounter dishwasher double skin with drain pump 40x40 - 230 V				
Model	SAP Code	00011285		
<b>1. SAP Code:</b> 00011285		15. Number of programs:		
2. Net Width [mm]: 466		16. Opening of device:  Tilting down		
3. Net Depth [mm]: 556		17. Door clear height [mm]: 320		
4. Net Height [mm]: 695		18. Inlet pressure [bar]: 2-4		
<b>5. Net Weight [kg]:</b> 46.00		19. Adjustable feet: Yes		
<b>6. Gross Width [mm]:</b> 516		20. Number of skin:		
<b>7. Gross depth [mm]:</b> 606		21. Self-cleaning cycle:  Yes		
8. Gross Height [mm]: 745		22. Boiler capacity [l]: 2.60		
9. Gross Weight [kg]: 49.00		<b>23. Boiler power [kW]:</b> 2.600		
10. Device type: Electric unit		24. Basin volume [l]:		
11. Control type: Digital		<b>25. Tank power [kW]:</b> 0.600		
12. Material: Stainless steel		26. Number of arms for both rinsing and washing:		
13. Power electric [kW]: 3.500		<b>27. Arm connection:</b> Click-clack - easy removal with one hand		

28. Washing arm type:

Rotatable two-pronged

14. Loading:

230 V / 1N - 50 Hz

Technical parameters





Undercounter dishwasher double skin with drain pump 40x40 - 230 V				
Model	SAP Code	00011285		

29. Washing arm material: 41. Heating system: Composite HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle 42. Hot water electric valve: 30. Rinsing arm type: Rotating two-pronged 31. Rinsing arm material: 43. Closing door system: Composite ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes 32. Deep drawn tank: 44. Rack size [mm]: Yes 400 x 400 33. Rack support: 45. Display type: Pressed ProScreen - 4 digit display + 2 LED bars 34. Tank surface strainers: 46. USB port: composite Yes, for Firmware actualisation 35. Drain filter: 47. Drain pump: ArchiMedes - double filtration with overflow discharge Yes ensures only 18% loss of clean water to waste 36. Thermostop: 48. Self-diagnostics: Yes Yes

37. Boiler thermostat adjust: Yes

#### 38. Rack feed capacity:

24-30-40

#### 39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

#### 40. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

### 49. Wash pump type:

two-way - DuoFlow

#### 50. Detergent dispenser:

#### 51. Rinse aid dispenser:

#### 52. Water consumption of the washing cycle [l/basket]:

1,9



### Technical parameters

58. Program ProFessional:

Yes

Undercounter dishwasher double skin with drain pump 40x40 - 230 V				
Model SA	P Code 00	0011285		
<b>53. Washing cycle time [s/basket]:</b> 90-120-150		Program ProTemp: Yes		
<b>54. Rinse water temperature [°C]:</b> 65		Program ProClean: Yes		
<b>55. Standard equipment for device:</b> 1x glass basket, 1x plate basket, 1x cutlery basket		<b>Program ProDrain:</b> Yes		
<b>56. Additional information:</b> The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free		Program ProPlates: Yes		
<b>57. Program ProSpeed:</b> Yes		<b>Noise of device:</b> 54,3		

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com