



Pot and pan washer double skin with drain pump 55x61 - 400 V

Model SAP Code 00011970



- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 850
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle [l/basket]: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011970	Boiler capacity [l]	12.00
Net Width [mm]	782	Boiler power [kW]	6.000
Net Depth [mm]	719	Basin volume [l]	37
Net Height [mm]	1927	Tank power [kW]	3.000
Net Weight [kg]	173.00	Water consumption of the washing cycle [l/basket]	3
Power electric [kW]	10.500	Door clear height [mm]	850
Loading	400 V / 3N - 50 Hz	Rack size [mm]	560 x 630




Technical drawing

Pot and pan washer double skin with drain pump 55x61 - 400 V

Model SAP Code 00011970

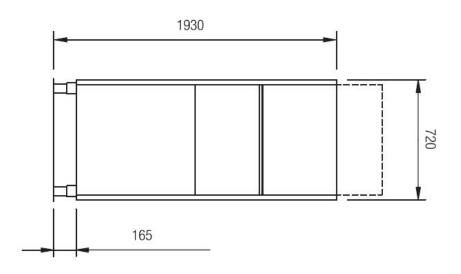

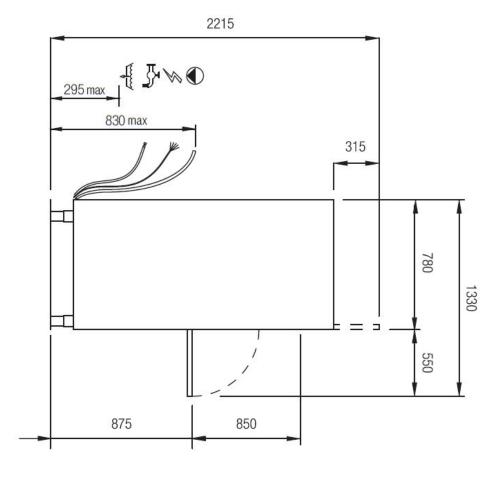

Product benefits



Pot and pan washer double skin with drain pump 55x61 - 400 V

SAP Code 00011970 Model

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Stainless steel washing arms upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm
 - easy and safe handling during cleaning; higher user comfort
- **LED Display** smartScreen, a large color graphic display showing the washing progress
 - easy control of the dishwasher operation
 - continuous information on the status of the wash cycle
 - diagnostics in the event of a fault
 - **Double pump**

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- **Detergent dispensers**

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- **Double filter system** the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
 - higher washing efficiency; longer life of the washing bath
- **Energy saving** energy saving energy saving system due to lowering the temperature of the boiler
 - cost saving

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- **Double shell construction** stainless steel construction with insulated double jacket
 - quiet operation
 - energy saving
- **Fast heating** 10 performance management allows the current running of the boiler and basins body
 - guick first warm-up of the dishwasher
 - smooth operation
 - Air break tank

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization

e-mail: rmgastro@rmgastro.com 2024-07-30 web: www.rmgastro.com



Technical parameters


Pot and pan washer double skin with drain pump 55x61 - 400 V				
Model SAP Code		00011970		
1. SAP Code: 00011970		15. Number of programs:		
2. Net Width [mm]: 782		16. Opening of device: Tilting down		
3. Net Depth [mm]: 719		17. Door clear height [mm]: 850		
4. Net Height [mm]: 1927		18. Inlet pressure [bar]: 1-6		
5. Net Weight [kg]: 173.00		19. Adjustable feet: Yes		
6. Gross Width [mm]: 870		20. Number of skin:		
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes		
8. Gross Height [mm]: 2200		22. Boiler capacity [l]: 12.00		
9. Gross Weight [kg]: 183.00		23. Boiler power [kW]: 6.000		
10. Device type: Electric unit		24. Basin volume [l]: 37		
11. Control type: Digital		25. Tank power [kW]: 3.000		
12. Material: AISI 304		26. Number of arms for both rinsing and washing:		
13. Power electric [kW]: 10.500		27. Arm connection: Click-clack - easy removal with one hand		

28. Washing arm type:

Rotating trident

14. Loading:

400 V / 3N - 50 Hz





Dot and nar	wacher deuble	ckip with drain	n pump 55x61 - 400 V
PUL AIIU DAI	i wasilei uouble	SKIII WILII ULAII	II DUIIID 33X61 - 4UU V

Model SAP Code 00011970

29. Washing arm material:

Composite

30. Atmospheric boiler with rinse pump:

Yes

31. Rinsing arm type:

Rotating trident

32. Rinsing arm material:

Composite

33. Deep drawn tank:

Yes

34. Rack support:

Pressed

35. Tank surface strainers:

composite

36. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

37. Thermostop:

yes

38. Boiler thermostat adjust:

Yes

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

40. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

41. Rinse system:

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

42. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

43. Quick heating system:

QuickReady - System for rapid heating of water in the tank

44. Hot water electric valve:

Yes

45. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

46. Rack size [mm]:

560 x 630

47. Display type:

LCD multifunction display

48. USB port:

Yes, for Firmware actualisation

49. Drain pump:

Yes

50. Self-diagnostics:

Yes



Technical parameters

Pot and pan washer double skin with drain pump 55x61 - 400 V					
Model SAP Code		00011970			
51. Wash pump type: two-way - DuoFlow		60. Program ProFessional 8: Yes			
52. Detergent dispenser: Yes		61. Program ProFessional 10: Yes			
53. Rinse aid dispenser: Yes		62. Program ProClean: Yes			
54. Water consumption of the washing cycle [l/basket]:		63. Program ProDrain: Yes			
55. Rinse water temperature [°C]: 80-85		64. Program ProEco: Yes			
56. Additional information: The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free		65. Program ProLong: Yes			
57. Program ProFessional 2: Yes		66. Program ProActive 5: Yes			
58. Program ProFessional 4: Yes		67. Program ProActive 7: Yes			

59. Program ProFessional 6: