

Technical data sheet

Product features



Cooking range electric

Model	SAP Code	00009029
--------------	-----------------	----------



- Device type: Electric unit
- Power consumption of the zone 1 [kW]: 2,5
- Power consumption of the zone 2 [kW]: 2,5
- Protection of controls: IP24
- Material: AISI 304 top plate and cladding

SAP Code	00009029	Loading	400 V / 3N - 50 Hz
Net Width [mm]	400	Number of zones	2
Net Depth [mm]	730	Power consumption of the zone 1 [kW]	2,5
Net Height [mm]	300	Power consumption of the zone 2 [kW]	2,5
Net Weight [kg]	23.00	Solid top dimensions [mm x mm]	300 x 300
Power electric [kW]	5.000		

Technical data sheet

Technical drawing






Cooking range electric

Model

SAP Code

00009029

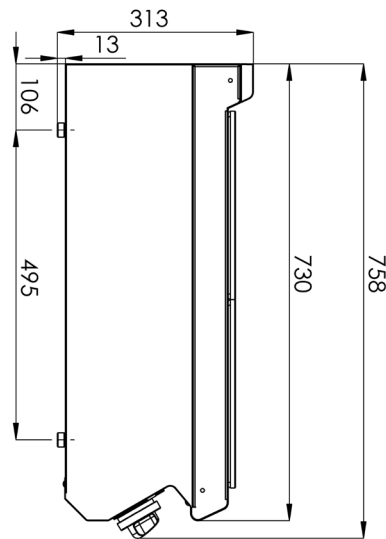

Technical data sheet

Technical parameters



Cooking range electric

Model

SAP Code

00009029

1. SAP Code:

00009029

2. Net Width [mm]:

400

3. Net Depth [mm]:

730

4. Net Height [mm]:

300

5. Net Weight [kg]:

23.00

6. Gross Width [mm]:

440

7. Gross depth [mm]:

800

8. Gross Height [mm]:

480

9. Gross Weight [kg]:

29.00

10. Device type:

Electric unit

11. Construction type of device:

Table top

12. Power electric [kW]:

5.000

13. Loading:

400 V / 3N - 50 Hz

14. Protection of controls:

IP24

15. Exterior color of the device:

Stainless steel

16. Material:

AISI 304 top plate and cladding

17. Indicators:

operation

18. Worktop type:

Molded - comfortable cleaning maintenance

19. Worktop material:

AISI 304

20. Worktop Thickness [mm]:

1.50

21. Number of zones:

2

22. Power consumption of the zone 1 [kW]:

2,5

23. Power consumption of the zone 2 [kW]:

2,5

24. Maximum device temperature [°C]:

400

25. Minimum device temperature [°C]:

50

26. Service accessibility:

Trough the frontal panel

27. Number of burners/hot plates:

2

28. Type of electric cooking zones:

Squared

Technical data sheet

Technical parameters



Cooking range electric

Model	SAP Code	00009029
-------	----------	----------

29. Solid top dimensions [mm x mm]:

300 x 300

30. Cross-section of conductors CU [mm²]:

1

– Výkon (kW): 3,7-5 (230 V); 6,4-8,7 (400 V)