

Technical data sheet

Product features



Fry-top griddle plate electric smooth counter top 230 V

Model	SAP Code	00003101
-------	----------	----------



- Top type: Smooth
- Griddle dimensions [mm x mm]: 365 x 240
- Griddle thickness [mm]: 8.00
- Container for liquid fat: Yes
- Maximum device temperature [°C]: 300
- Surface finish: sandblasted surface without coating

SAP Code	00003101	Power electric [kW]	1.800
Net Width [mm]	388	Loading	230 V / 1N - 50 Hz
Net Depth [mm]	334	Griddle dimensions [mm x mm]	365 x 240
Net Height [mm]	185	Top type	Smooth
Net Weight [kg]	12.00		

Technical data sheet

Technical drawing






Fry-top griddle plate electric smooth counter top 230 V

Model

SAP Code

00003101

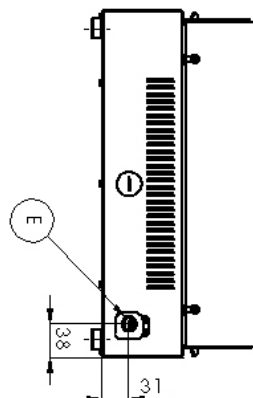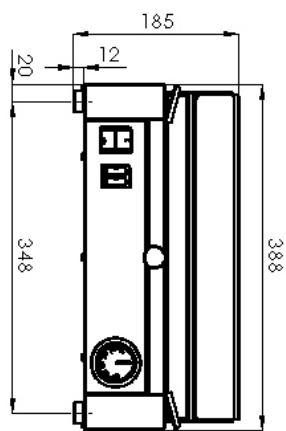

Technical data sheet

Product benefits



Fry-top griddle plate electric smooth counter top 230 V

Model	SAP Code	00003101
-------	----------	----------

1

Small dimensions

low space requirements

- also usable for stall sales

Technical data sheet

Technical parameters



Fry-top griddle plate electric smooth counter top 230 V

Model

SAP Code

00003101

1. SAP Code:

00003101

2. Net Width [mm]:

388

3. Net Depth [mm]:

334

4. Net Height [mm]:

185

5. Net Weight [kg]:

12.00

6. Gross Width [mm]:

470

7. Gross depth [mm]:

435

8. Gross Height [mm]:

230

9. Gross Weight [kg]:

15.00

10. Device type:

Electric unit

11. Construction type of device:

Table top

12. Power electric [kW]:

1.800

13. Loading:

230 V / 1N - 50 Hz

14. Protection of controls:

IPX4

15. Exterior color of the device:

Stainless steel

16. Material:

Stainless steel

17. Indicators:

operation and warm-up

18. Surface finish:

sandblasted surface without coating

19. Maximum device temperature [°C]:

300

20. Minimum device temperature [°C]:

50

21. Adjustable feet:

Yes

22. Griddle dimensions [mm x mm]:

365 x 240

23. Griddle thickness [mm]:

8.00

24. Container for liquid fat:

Yes

25. Uniform heating:

Yes

26. Top type:

Smooth

27. Power consumption of the zone 1 [kW]:

1,8

28. Cross-section of conductors CU [mm²]:

0,5