Undercounter dishwasher double skin 40x40 - 230 V


Product features




Undercounter dishwasher double skin 40x40 - 230 V							
Model	SAP Code	00011269					
		<ul> <li>Display type: ProScreen - 4 digit display + 2 LED bars</li> <li>Number of programs: 5</li> <li>Number of skin: 2</li> <li>Door clear height [mm]: 320</li> <li>Rack size [mm]: 400 x 400</li> <li>Water consumption of the washing cycle [l/basket]: 1,9</li> <li>Washing cycle time [s/basket]: 90-120-150</li> <li>Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump</li> <li>Wash pump type: two-way - DuoFlow</li> <li>Self-cleaning cycle: Yes</li> <li>Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste</li> </ul>					
SAP Code	00011269	Boiler power [kW]	2.600				
Net Width [mm]	466	Basin volume [l]	8				
Net Depth [mm]	556	Tank power [kW]	0.600				
Net Height [mm]	695	Water consumption of the wash- ing cycle [l/basket]	1,9				
Net Weight [kg]	45.00	Washing cycle time [s/basket]	90-120-150				
Power electric [kW]	3.500	Door clear height [mm]	320				
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400				
Boiler capacity [ l ]	2.60	Noise of device	54,3				


Technical drawing









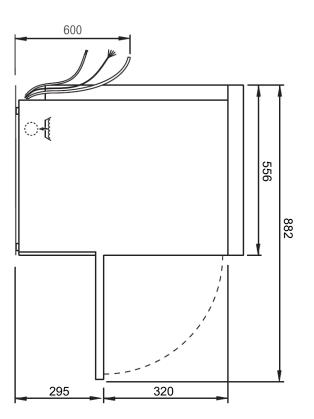

**Product benefits** 



### Undercounter dishwasher double skin 40x40 - 230 V **SAP Code** 00011269 Model Stainless steel outer shell construction **Fast heating** round construction with stainless steel, rounded edges, Performance management allows the current running of the boiler and basins body Deep-drawn bathtub - easy cleaning, high hygiene standard, long quick first warm-up of the dishwasher service life smooth operation Washing arms with a component, common for **Protection of fragile dishes** washing and rinsing softstart system for gradual start of washing programs to upper and lower composite swivel arms common protect fragile dishes for washing and rinsing with clickclack system for protects stemmed glasses and other fragile utensils easy removal easy and safe handling during cleaning; higher **Double shell construction** user comfort 10 stainless steel construction with insulated double jacket - quiet operation **LED Display** energy saving proScreen 4 local display + 2 LED strips - easy control of the dishwasher operation **Energy saving** 1 - continuous information on the status of energy saving energy saving system due to lowering the the wash cycle temperature of the boiler - diagnostics in the event of a fault cost saving **Double pump Fast heating** 12 unique two-way DuoFlow pump performance management allows the current running of - distributes the water pressure evenly between the the boiler and basins body upper and lower arms; no noise; allows the use of quick fault finding a weaker pump - transfer of original recipes Molded basket supports - keeping software up to date guide rails for the baskets molded from the body of the dishwasher high hygiene standard - longer service life **Detergent dispensers** two detergent and rinse aid dispensers - precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel **Double filter system** the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency - higher washing efficiency; longer life of the

washing bath

Technical parameters



Undercounter dishwasher double skin 40x40 - 230 V				
Model	SAP Code	00011269		
1. SAP Code:		15. Number of programs:		
00011269		5		
<b>2. Net Width [mm]:</b> 466		<b>16. Opening of device:</b> Tilting down		
<b>3. Net Depth [mm]:</b> 556		<b>17. Door clear height [mm]:</b> 320		
<b>4. Net Height [mm]:</b> 695		<b>18. Inlet pressure [bar]:</b> 2-4		
<b>5. Net Weight [kg]:</b> 45.00		<b>19. Adjustable feet:</b> Yes		
6. Gross Width [mm]: 516		<b>20. Number of skin:</b>		
<b>7. Gross depth [mm]:</b> 606		<b>21. Self-cleaning cycle:</b> Yes		
<b>8. Gross Height [mm]:</b> 745		<b>22. Boiler capacity [ l ]:</b> 2.60		
<b>9. Gross Weight [kg]:</b> 48.00		<b>23. Boiler power [kW]:</b> 2.600		
<b>10. Device type:</b> Electric unit		<b>24. Basin volume [l]:</b> 8		
<b>11. Control type:</b> Digital		<b>25. Tank power [kW]:</b> 0.600		
<b>12. Material:</b> Stainless steel		<b>26. Number of arms for both rinsing and washing:</b>		
<b>13. Power electric [kW]:</b> 3.500		<b>27. Arm connection:</b> Click-clack - easy removal with one hand		
<b>14. Loading:</b> 230 V / 1N - 50 Hz		<b>28. Washing arm type:</b> Rotatable two-pronged		

Technical parameters



M	Iodel SAP Code	00011269	
29.	Washing arm material: Composite	<b>41. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle	
80.	Rinsing arm type: Rotating two-pronged	<b>42. Hot water electric valve:</b> Yes	
31.	<b>Rinsing arm material:</b> Composite	<b>43. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes	
32.	<b>Deep drawn tank:</b> Yes	<b>44. Rack size [mm]:</b> 400 × 400	
33.	Rack support: Pressed	<b>45. Display type:</b> ProScreen - 4 digit display + 2 LED bars	
34.	Tank surface strainers: composite	<b>46. USB port:</b> Yes, for Firmware actualisation	
35.	<b>Drain filter:</b> ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste	<b>47. Self-diagnostics:</b> Yes	
36.	<b>Thermostop:</b> Yes	<b>48. Wash pump type:</b> two-way - DuoFlow	
37.	<b>Boiler thermostat adjust:</b> Yes	<b>49. Detergent dispenser:</b> Yes	
38.	Rack feed capacity: 24-30-40	<b>50. Rinse aid dispenser:</b> Yes	
39.	<b>Detergent and rinse pump system:</b> ProDose - accurate dosing with a peristaltic pump	<b>51. Water consumption of the washing cycle [l/basket]:</b> 1,9	
40.	<b>Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the	52. Washing cycle time [s/basket]: 90-120-150	

Technical parameters



Undercounter dishwasher double skin 40x40 - 230 V					
Model	SAP Code	00011269			
<b>53. Rinse water temperature [°C]:</b> 65		<b>58. Program ProTemp:</b> Yes			
<b>54. Standard equipment for device:</b> 1x glass basket, 1x plate basket, 1x cutlery basket		<b>59. Program ProSelf:</b> Yes			
<b>55. Additional information:</b> The product comes with 1x F and 1x RM Rinse+ 10 kg (000.		<b>60. Program ProPlates:</b> Yes			
56. Program ProSpeed: Yes		<b>61. Noise of device:</b> 54,3			
<b>57. Program ProFessional:</b> Yes		-			