## **Technical data sheet**

Product features





Pot and pan washer double skin with drain pump 70x70 - 400 V			
Model	SAP Code	00011973	
S 202 P ABT	A group of articles - web	Undercounter, continuous and blac	k ware dishwasher
		<ul> <li>To the product for free: 1x RM Cleatix RM Rinse+ 10 kg (00012273)</li> <li>Display type: LCD multifunction de</li> <li>Number of programs: 11</li> <li>Number of skin: 2</li> <li>Door clear height [mm]: 850</li> <li>Rack size [mm]: 700 x 700</li> <li>Water consumption of the washine</li> <li>Detergent and rinse pump system dosing with a peristaltic pump</li> <li>Wash pump type: two-way - DuoF</li> <li>Self-cleaning cycle: Yes</li> <li>Drain filter: Evolution3 - double fit controlled partial discharge befor 0% loss of clean water to waste</li> </ul>	isplay og cycle [l/basket]: 4 n: ProDose - accurate Tow Itration with electronically
SAP Code	00011973	Boiler capacity [ l ]	12.00
Net Width [mm]	850	Boiler power [kW]	8.000
Net Depth [mm]	850	Basin volume [l]	68
Net Height [mm]	1930	Tank power [kW]	8.000
Net Weight [kg]	181.00	Water consumption of the wash- ing cycle [l/basket]	4
Power electric [kW]	18.700	Door clear height [mm]	850
Loading	400 V / 3N - 50 Hz	Rack size [mm]	700 x 700

Technical drawing



Pot and pan washer double skin with drain pump 70x70 - 400 V		
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher

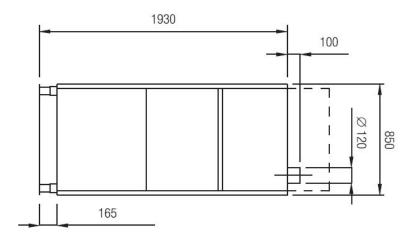

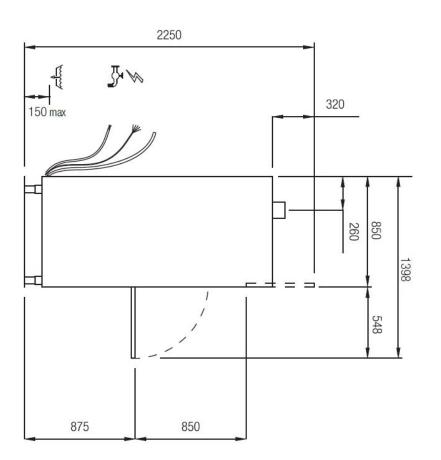

## **Technical data sheet**

Product benefits



Model     SAP Code       S 202 P ABT     A group of articles - web		00011973 Undercounter, continuous and black ware dishwasher		
				1
2	washing and rinsing, tri	vith stainless steel, separated for	9	<ul> <li>Double shell construction</li> <li>stainless steel construction with insulated double jacket         <ul> <li>quiet operation</li> <li>energy saving</li> </ul> </li> <li>Fast heating</li> </ul>
3	washing progress – easy control of the	lor graphic display showing the dishwasher operation ation on the status of event of a fault	10 11	<ul> <li>performance management allows the current running of the boiler and basins body <ul> <li>quick first warm-up of the dishwasher</li> <li>smooth operation</li> </ul> </li> <li>Air break tank <ul> <li>the open system of the boiler rinse, in cooperation</li> <li>with the rinse pump, ensures a constant pressure and</li> </ul> </li> </ul>
4		ow pump er pressure evenly between the rms; no noise; allows the use of		temperature of the rinse – possibility to use in HACCP systems water temperature suitable for sterilization
5	system for deterge			
6	ArchiMedes system pro increased water purifica	he waste filter together with the vide a discharge system with		
7	Energy saving energy saving energy sa temperature of the boil	aving system due to lowering the		

Technical parameters



Pot and pan washer double skin	with drain pump 70x7	70 - 400 V
Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>1. SAP Code:</b> 00011973		<b>15. Number of programs:</b> 11
<b>2. Net Width [mm]:</b> 850		<b>16. Opening of device:</b> Tilting down
<b>3. Net Depth [mm]:</b> 850		<b>17. Door clear height [mm]:</b> 850
<b>4. Net Height [mm]:</b> 1930		<b>18. Inlet pressure [bar]:</b> 1-6
5. Net Weight [kg]: 181.00		<b>19. Adjustable feet:</b> Yes
6. Gross Width [mm]:		<b>20. Number of skin:</b>
<b>7. Gross depth [mm]:</b> 950		<b>21. Self-cleaning cycle:</b> Yes
8. Gross Height [mm]: 2200		<b>22. Boiler capacity [ l ]:</b> 12.00
<b>9. Gross Weight [kg]:</b> 191.00		<b>23. Boiler power [kW]:</b> 8.000
<b>10. Device type:</b> Electric unit		<b>24. Basin volume [l]:</b> 68
<b>11. Control type:</b> Digital		<b>25. Tank power [kW]:</b> 8.000
<b>12. Material:</b> AISI 304		<b>26. Number of arms for both rinsing and washing:</b>
<b>13. Power electric [kW]:</b> 18.700		<b>27. Arm connection:</b> Hand loosen/tighten screw
<b>14. Loading:</b> 400 V / 3N - 50 Hz		<b>28. Washing arm type:</b> Rotating trident

Technical parameters



Model	SAP Code	00011973
S 202 P ABT	A group of articles - web	Undercounter, continuous and black ware dishwasher
<b>29. Washing arm material:</b> Stainless steel		<b>40. Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the boiler temperature
<b>80. Atmospheric boiler with rins</b> Yes	e pump:	<b>41. Rinse system:</b> UltraRinse2 - stainless steel rinsing arms including stainless steel nozzles with a geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure
<b>B1. Rinsing arm type:</b> Rotating trident		<b>42. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
<b>32. Rinsing arm material:</b> Stainless steel		<b>43. Quick heating system:</b> QuickReady - System for rapid heating of water in the tank
<b>33. Deep drawn tank:</b> Yes		<b>44. Hot water electric valve:</b> Yes
<b>34. Rack support:</b> Pressed		<b>45. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
<b>35. Tank surface strainers:</b> stainless steel		<b>46. Rack size [mm]:</b> 700 × 700
<b>36. Drain filter:</b> Evolution3 - double filtration w partial discharge before the rins of clean water to waste	2	<b>47. Display type:</b> LCD multifunction display
<b>37. Thermostop:</b> Yes		<b>48. USB port:</b> Yes, for Firmware actualisation
<b>28. Boiler thermostat adjust:</b> Yes		<b>49. Drain pump:</b> Yes

Technical parameters



vith drain pump 70x70	- 400 V	
SAP Code	00011973	
A group of articles - web	Undercounter, continuous and black ware dishwasher	
	<b>61. Program ProClean:</b> Yes	
	<b>62. Program ProDrain:</b> Yes	
	<b>63. Program ProEco:</b> Yes	
ing cycle [l/basket]:	<b>64. Program ProLong:</b> Yes	
	<b>65. Program ProActive 5:</b> Yes	
	66. Program ProActive 7: Yes	
	<b>67. Cross-section of conductors CU [mm<sup>2</sup>]:</b>	
	<b>68. Water supply connection:</b> 3/4"	
	<b>69. Diameter nominal:</b> DN 50	
	SAP Code	

**60. Program ProFessional 10:** Yes