

Product features

Combi convection steam oven MINI electric 10x GN 1/1 automatic cleaning direct steam touch screen 5´´ 400 V		
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines




- Steam type: InjectionNumber of GN / EN: 10
- GN / EN size in device: GN 1/1
- GN device depth: 40
- Control type: Touchscreen + buttons
- Display size: 5"
- Humidity control: MeteoSystem regulation based on direct measurement of humidity in the chamber (patented)
- Advanced moisture adjustment: No
- Delta T heat preparation: Yes
- Automatic preheating: Yes
- Multi level cooking: Drawer program control of heat treatment for each dish separately
- Door constitution: Vented safety double glass, removable for easy cleaning

SAP Code	00011861	Steam type	Injection
Net Width [mm]	519	Number of GN / EN	10
Net Depth [mm]	808	GN / EN size in device	GN 1/1
Net Height [mm]	770	GN device depth	40
Net Weight [kg]	96.00	Control type	Touchscreen + buttons
Power electric [kW]	13.800	Display size	5"
Loading	400 V / 3N - 50 Hz		



Technical drawing

Combi convection steam oven MINI electric 10x GN 1/1 automatic cleaning direct steam touch screen 5 ´ 400 V		
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines

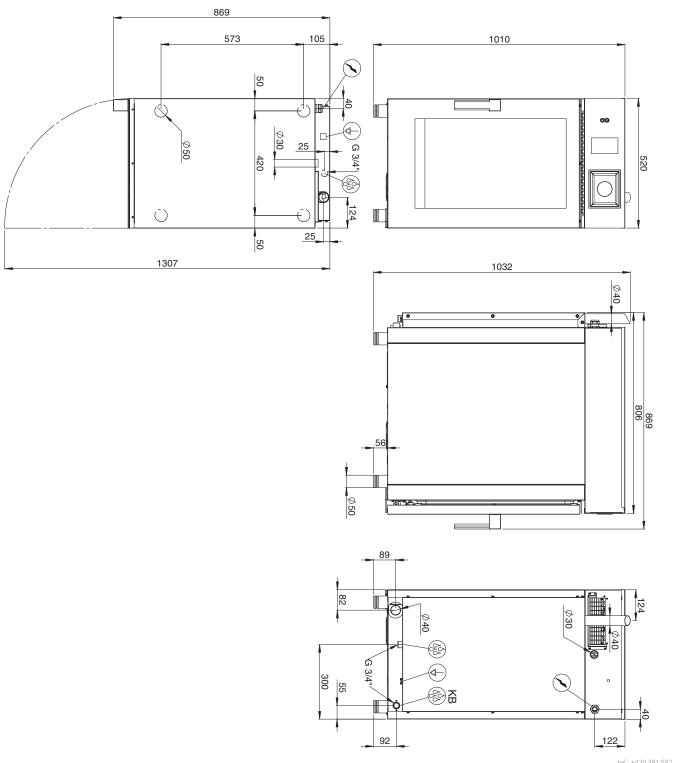



Product benefits

Combi convection steam oven MINI electric 10x GN 1/1 automatic cleaning direct steam touch screen 5 ´ 400 V		
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines

Double loading insert, longitudinal

inserts formed from rigid stainless steel wire allowing insertion of GN, double insertion, and the possibility of inserting divided GN

- the possibility of inserting more GNs in the case of shallow GNs and the possibility of cooking larger quantities of food, or more types of food
- **Narrow body** economical construction with a panel placed on top of full-size GN 1/1 inserts
 - full-featured kettle for small spaces
- A symbiotic steam generation system simultaneous use of direct injection and boiler, maintenance of 100% humidity, or its regulation
 - preparation of different dishes and cooking styles in an environment precisely set for the food or dish
 - Touch screen display.

simple intuitive control with unique pictograms everything in Czech

the possibility of using preset programs or manual control

- help with cooking even for less skilled cooks, safe baking even in the absence of an operator; create your own recipes; easy to use
- Weather system

patented device for measuring steam saturation in real time and in steam mode, the only one on the market

- the system automatically maintains the optimum humidity to the chamber, thus avoiding food spoilage
- **Steam tuner**

a control element that allows setting the exact saturation of steam in the cooking chamber during the cooking process

 possibility of cooking different types of cuisine, from very moist steam for typical Czech dishes to lowsaturated steam for e.g. French cuisine

A kit of two machines on top of each other

connection kit allowing two machines to be placed on top of each other

connects the connections, inlets, wastes and ventilation of the lower combi oven

- allows the user to place two machines in smaller spaces to increase production; the chef can prepare two different dishes simultaneously
- **Automatic washing**

integrated chamber washing system the possibility of using liquid and tablet detergents option to use vinegar as a rinse aid the system also descales the micro boiler

- the chamber of the conveyer is washed without the presence of the operator, for example overnight; the system decalcifies the micro-boiler without the need for service intervention; the chamber is maintained in a constant 100% hygienic quality
- Six-speed fan, reversible with automatic calculation of direction change

in cooperation with the symbiotic system, it ensures perfect distribution of steam without losing its saturation its operation is controlled by the program or manually

allows the preparation of a variety of dishes from the most delicate to high temperature baking at the highest speed

External temperature probe

temperature probe located outside the cooking area choice of single or multipoint probe or vacuum probe

 positioning outside the cooking chamber extends its life; ensuring total food hygiene safety; HACCP record; control of heat treatment in the absence of the cook

Longitudinal insertion to GN

penetration placed on the depth of the machine exchangeable for 600x400 sheet metal inserts

 possibility of inserting a larger range of GNs, not just 1/1 size possibility of using 6x4 baking trays

2025-04-25



Technical parameters

Combi convection steam oven MI	NI electric 10x GN 1/1	automatic cleaning direct steam touch screen 5´´400 V
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines
1. SAP Code: 00011861		14. Exterior color of the device: Stainless steel
2. Net Width [mm]: 519		15. Adjustable feet: Yes
3. Net Depth [mm]: 808		16. Humidity control: MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented)
4. Net Height [mm]:		17. Stacking availability: Yes
5. Net Weight [kg]: 96.00		18. Control type: Touchscreen + buttons
6. Gross Width [mm]: 580		19. Additional information: possibility of reverse door opening - handle on the right side (must be specified when ordering)
7. Gross depth [mm]: 920		20. Steam type: Injection
8. Gross Height [mm]: 980		21. Sturdier version: No
9. Gross Weight [kg]: 106.00		22. Chimney for moisture extraction: Yes
10. Device type: Electric unit		23. Delayed start: No
11. Power electric [kW]: 13.800		24. Display size: 5"
12. Loading: 400 V / 3N - 50 Hz		25. Delta T heat preparation: Yes
13. Material: AISI 304		26. Automatic preheating: Yes



Technical parameters

	I	
Combi convection steam oven M	INI electric 10x GN 1/1	Lautomatic cleaning direct steam touch screen 5´´400 V
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines
27. Automatic cooling:		41. Probe:
Yes		Optional
28. Unified finishing of meals EasyService: Yes		42. Remote control: No
29. Night cooking: Yes		43. Shower: Manual (optional)
30. Washing system: Open		44. Distance between the layers [mm]: 30
31. Detergent type: Liquid washing detergent + water rinse		45. Smoke-dry function: Yes
32. Multi level cooking: Drawer program - control of heat dish separately	treatment for each	46. Interior lighting: Yes
33. Advanced moisture adjustment: No		47. Low temperature heat treatment: Yes
34. Slow cooking: from 50 °C		48. Number of fans:
35. Fan stop: Interruption when door is opened, not braked		49. Number of fan speeds:
36. Lighting type: LED lighting in the door, on one side		50. Number of programs: 1000
37. Cavity material and shape: AISI 304, with rounded corners for easy cleaning		51. USB port: Yes, for uploading recipes and updating firmware
38. Reversible fan: Yes		52. Door constitution: Vented safety double glass, removable for easy cleaning
39. Sustaince box: Yes		53. Number of preset programs: 100
40. Heating element material:		54. Number of recipe steps:

Incoloy



Technical parameters

Combi convection steam oven MINI electric 10x GN 1/1 automatic cleaning direct steam touch screen 5 ´ 400 V		
Model	SAP Code	00011861
MSDBD 1011 E	A group of articles - web	Convection machines
55. Minimum device temperature [°C]: 50		61. GN device depth: 40
56. Maximum device temperature [°C]: 300		62. Food regeneration: Yes
57. Device heating type: Combination of steam and hot air		63. Cross-section of conductors CU [mm ²]:
58. HACCP: Yes		64. Diameter nominal: DN 50
59. Number of GN / EN:		65. Water supply connection: 3/4"

60. GN / EN size in device:

GN 1/1