

Technical data sheet

Product features



Manual water softener double tap 8 l

Model	SAP Code	00002201
LT 08	A group of articles - web	Water softeners



- Resin capacity: 5.60
- Inlet pressure [bar]: 2-8
- Material: Stainless steel

SAP Code	00002201	Net Height [mm]	415
Net Width [mm]	190	Net Weight [kg]	10.00
Net Depth [mm]	255	Resin capacity	5.60


Technical data sheet

Technical drawing



Manual water softener double tap 8 l

Model	SAP Code	00002201
LT 08	A group of articles - web	Water softeners

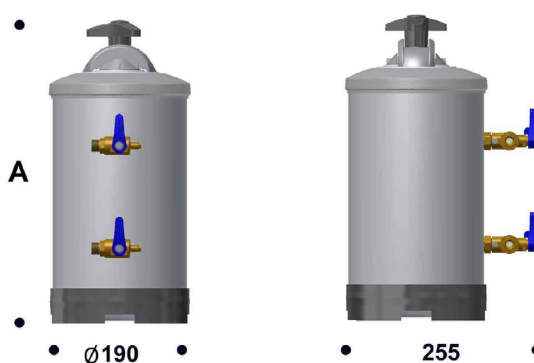

TECHNICAL DATA

Height A mm 400
 Weight Kg 7,5
 Supply water pressure min 1 bar, max 8 bar
 Maximum flow rate recommended 1000 l/h
 Room temperature min 4°C - max 25°C
 Salt content per regeneration 1 kg

SUPPLY WATER CHARACTERISTICS

- Drinking water
- Temperature: min 4°C - max 25°C
- Crystal-clear water (SDI 1)
- Maximum hardness 90°f

THE PACKAGING CONTAINS:

- 1 steel AISI 304 cylinder holding 8 litres
- 5.6 litres of cationic resins adapt for softening
- 1 instruction manual
- 1 unloading pipe

LITRES OF SOFTENED WATER ACCORDING TO ITS HARDNESS						
°f	20	30	40	50	60	CYCLIC CAPACITY
°d	11	16	22	28	33	[m ³ .°f]
ppm CaCO ₃	200	300	400	500	600	
	1680	1120	840	672	560	33.6

THE WATER SOFTENER IS SUITED FOR:



Technical data sheet

Product benefits



Manual water softener double tap 8 l

Model	SAP Code	00002201
LT 08	A group of articles - web	Water softeners

1

All-stainless design

only stainless steel intended for food contact is used

2

Regeneration of the softener is done only with salt

light regeneration with salt

Technical data sheet

Technical parameters



Manual water softener double tap 8 l

Model	SAP Code	00002201
LT 08	A group of articles - web	Water softeners

1. SAP Code:

00002201

8. Gross Height [mm]:

450

2. Net Width [mm]:

190

9. Gross Weight [kg]:

11.00

3. Net Depth [mm]:

255

10. Device type:

Neutral unit

4. Net Height [mm]:

415

11. Material:

Stainless steel

5. Net Weight [kg]:

10.00

12. Inlet pressure [bar]:

2-8

6. Gross Width [mm]:

200

13. Resin capacity:

5.60

7. Gross depth [mm]:

200