

Technical data sheet



Product features

Boiling kettle electric indirect autoclave 150 l

Model	SAP Code	00015047
--------------	-----------------	----------



- Device type: Electric unit
- Device heating type: Indirect
- Steam pressure regulation: Mechanical - the valve releases steam at high pressure
- Filling: Mechanical cock
- Jacket filling: Semi-automatic
- Drain valve diameter: 2"
- Usable volume [l]: 150

SAP Code	00015047	Power electric [kW]	21.000
Net Width [mm]	800	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	900	Usable volume [l]	150
Net Height [mm]	900	Device heating type	Indirect
Net Weight [kg]	130.00	Steam pressure regulation	Mechanical - the valve releases steam at high pressure

Technical data sheet



Technical drawing


Boiling kettle electric indirect autoclave 150 l

Model

SAP Code

00015047

1 - PŘÍVOD STUDENÉ VODY	5 - VYPOUŠTĚČÍ KOHOOUT DUPUKÁTORU
2 - POJISTNÝ VENTIL + MONOMER	6 - KONTROLNÍ KOHOOUT HLADINÝ DUPUKÁTORU
3 - PŘÍVOD ZMĚKČELE VODY	7 - VYPOUŠTĚČÍ KOHOOUT DUPUKÁTORU
4 - PŘÍVOD NAPĚTÍ 400V	8 - NÁPOUŠTĚČÍ BATERIE

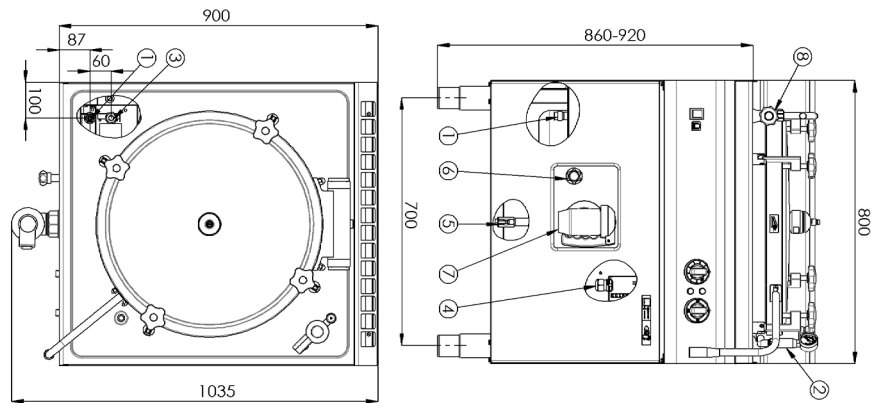

Technical data sheet



Technical parameters

Boiling kettle electric indirect autoclave 150 l

Model

SAP Code

00015047

1. SAP Code:

00015047

2. Net Width [mm]:

800

3. Net Depth [mm]:

900

4. Net Height [mm]:

900

5. Net Weight [kg]:

130.00

6. Gross Width [mm]:

840

7. Gross depth [mm]:

970

8. Gross Height [mm]:

1160

9. Gross Weight [kg]:

153.00

10. Device type:

Electric unit

11. Construction type of device:

Stationary

12. Power electric [kW]:

21.000

13. Loading:

400 V / 3N - 50 Hz

14. Protection of controls:

IPX4

15. Material:

AISI 304 top plate, AISI 430 cladding

16. Indicators:

operation and warm-up

17. Drain valve diameter:

2"

18. Worktop type:

Molded - comfortable cleaning maintenance

19. Worktop material:

AISI 304

20. Worktop Thickness [mm]:

1.50

21. Device heating type:

Indirect

22. Volume capacity of the container [l]:

150.00

23. Maximum device temperature [°C]:

90

24. Minimum device temperature [°C]:

30

25. Safety thermostat:

Yes

26. Safety thermostat up to x ° C:

150

27. Adjustable feet:

Yes

28. Bottom material:

AISI 316

Technical data sheet



Technical parameters

Boiling kettle electric indirect autoclave 150 l

Model

SAP Code

00015047

29. Usable volume [l]:

150

30. Filling:

Mechanical cock

31. Jacket filling:

Semi-automatic

32. Steam pressure regulation:

Mechanical - the valve releases steam at high pressure

33. Type of drain valve:

conical

34. Manometer:

Yes

35. Cross-section of conductors CU [mm²]:

10

- Výkon (kW): 5,7-6,6 (230 V); 9,8-11 (400 V)

36. Water supply connection:

1/2"