

Technical data sheet

Product features



Hood type dishwasher double skin heat recovery system 50x50 - 400 V

| | | |
|--------------|-----------------|----------|
| Model | SAP Code | 00011295 |
|--------------|-----------------|----------|



- Display type: LCD multifunction display
- Number of programs: 13
- Number of skin: 2
- Door clear height [mm]: 465
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,2
- Washing cycle time [s/basket]: 60-90-180
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

| | | | |
|------------------------------|--------------------|--|-----------|
| SAP Code | 00011295 | Boiler power [kW] | 7.000 |
| Net Width [mm] | 836 | Basin volume [l] | 22 |
| Net Depth [mm] | 721 | Tank power [kW] | 2.500 |
| Net Height [mm] | 2265 | Water consumption of the washing cycle [l/basket] | 2,2 |
| Net Weight [kg] | 111.00 | Washing cycle time [s/basket] | 60-90-180 |
| Power electric [kW] | 10.200 | Door clear height [mm] | 465 |
| Loading | 400 V / 3N - 50 Hz | Rack size [mm] | 500 x 500 |
| Boiler capacity [l] | 12.00 | | |

Technical data sheet

Technical drawing




Hood type dishwasher double skin heat recovery system 50x50 - 400 V

Model

SAP Code

00011295

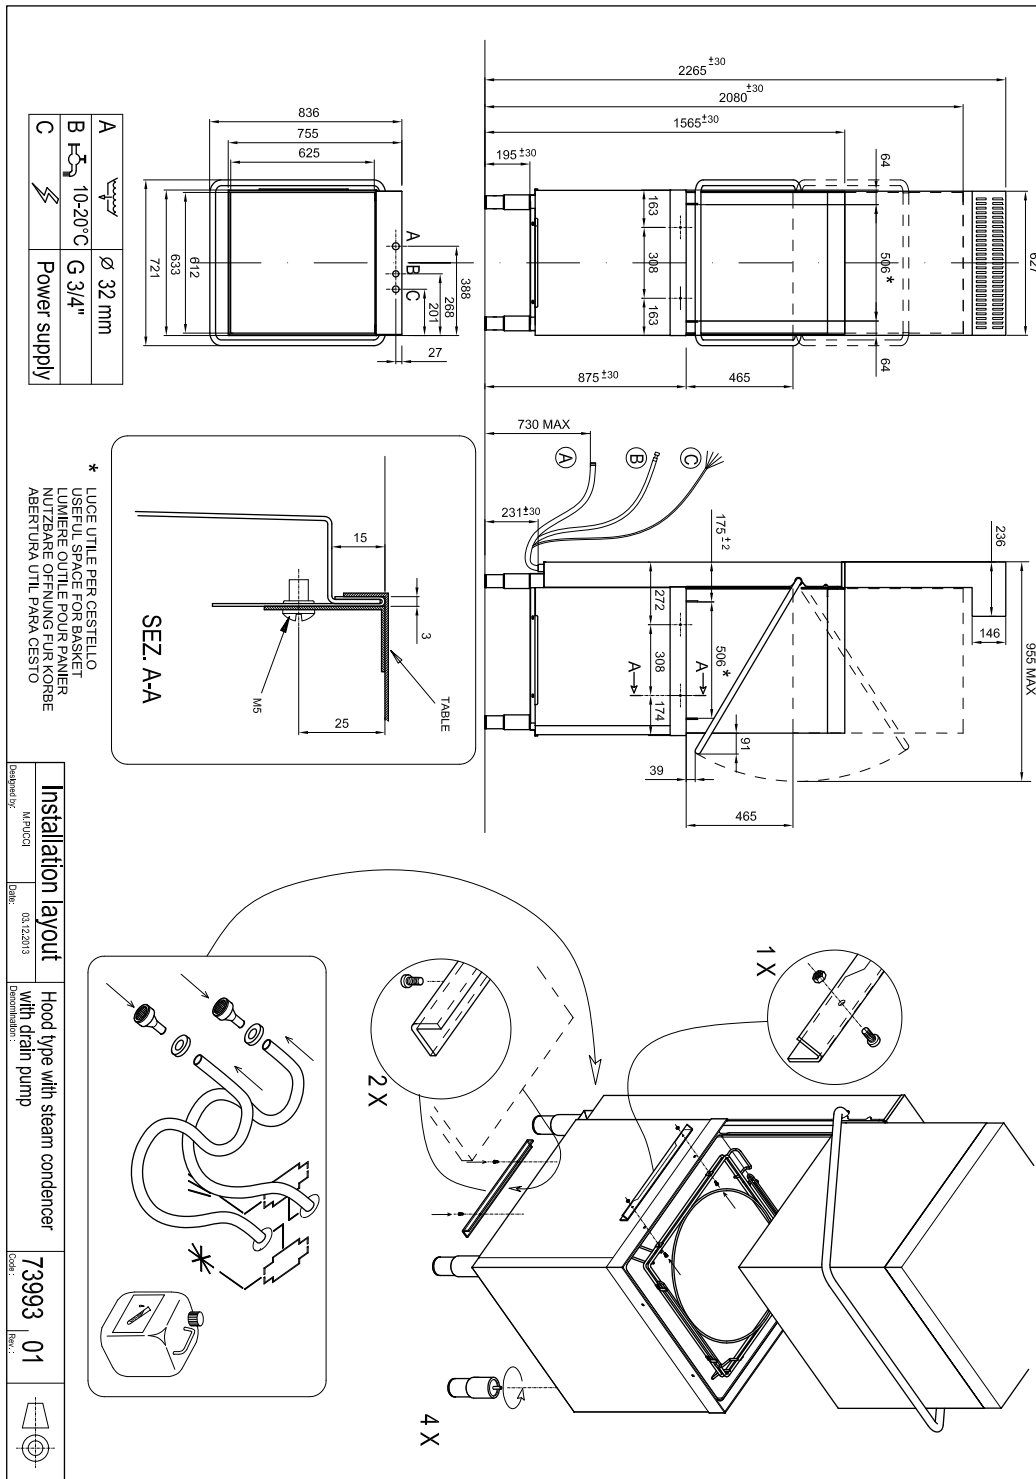

Technical data sheet

Product benefits



Hood type dishwasher double skin heat recovery system 50x50 - 400 V

Model

SAP Code

00011295

1

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life

2

Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning
- increased user comfort

3

LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

6

Detergent dispensers

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

8

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving

9

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

10

Double shell construction

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

11

Fast heating

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

12

Possibility of recovery

saving up to 40% of boiler energy improves the comfort environment of the workplace environment without steam saves water

- saving on energy and water costs; environmentally friendly system; safe system; pleasant workplace

Technical data sheet

Technical parameters



Hood type dishwasher double skin heat recovery system 50x50 - 400 V

| Model | SAP Code | 00011295 |
|-------|----------|----------|
|-------|----------|----------|

1. SAP Code:

00011295

2. Net Width [mm]:

836

3. Net Depth [mm]:

721

4. Net Height [mm]:

2265

5. Net Weight [kg]:

111.00

6. Gross Width [mm]:

771

7. Gross depth [mm]:

886

8. Gross Height [mm]:

2314

9. Gross Weight [kg]:

121.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

Stainless steel

13. Power electric [kW]:

10.200

14. Loading:

400 V / 3N - 50 Hz

15. Number of programs:

13

16. Opening of device:

Flip up

17. Door clear height [mm]:

465

18. Inlet pressure [bar]:

2-4

19. Adjustable feet:

Yes

20. Number of skin:

2

21. Self-cleaning cycle:

Yes

22. Boiler capacity [l]:

12.00

23. Boiler power [kW]:

7.000

24. Basin volume [l]:

22

25. Tank power [kW]:

2.500

26. Number of arms for both rinsing and washing:

2

27. Arm connection:

Hand loosen/tighten screw

28. Washing arm type:

Rotatable two-pronged

Technical data sheet

Technical parameters



Hood type dishwasher double skin heat recovery system 50x50 - 400 V

Model

SAP Code

00011295

29. Washing arm material:

Stainless steel

30. Atmospheric boiler with rinse pump:

Yes

31. Rinsing arm type:

Rotating two-pronged

32. Rinsing arm material:

Stainless steel

33. Deep drawn tank:

Yes

34. Rack support:

Pressed

35. Tank surface strainers:

stainless steel

36. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

37. Thermostop:

Yes

38. Boiler thermostat adjust:

Yes

39. Rack feed capacity:

60-40-20

40. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

41. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

42. Rinse system:

UltraRinse2 - stainless steel rinsing arms including stainless steel nozzles with a geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

43. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

44. Quick heating system:

QuickReady - System for rapid heating of water in the tank

45. Lift system:

ProGlide - Required lifting force equals 3 kg thanks to counterweights and gentle guidance, reduces operator fatigue

46. Heat recovery:

1 copper-aluminum battery - saving up to 40% of the energy needed to heat the water in the boiler, at the same time, by absorbing the released steam, it eliminates the need to use a hood

47. Hot water electric valve:

Yes

48. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

Technical data sheet

Technical parameters



Hood type dishwasher double skin heat recovery system 50x50 - 400 V

| Model | SAP Code | 00011295 |
|-------|----------|----------|
|-------|----------|----------|

49. Rack size [mm]:

500 x 500

50. Display type:

LCD multifunction display

51. Location of control panel:

On the top

52. USB port:

Yes, for Firmware actualisation

53. Drain pump:

Yes

54. Self-diagnostics:

Yes

55. Wash pump type:

two-way - DuoFlow

56. Detergent dispenser:

Yes

57. Rinse aid dispenser:

Yes

58. Water consumption of the washing cycle [l/basket]:

2,2

59. Washing cycle time [s/basket]:

60-90-180

60. Rinse water temperature [°C]:

80

61. Standard equipment for device:

1x glass basket, 1x plate basket, 1x cutlery basket

62. Additional information:

The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free

63. Program ProSpeed:

Yes

64. Program ProFessional:

Yes

65. Program ProTemp:

Yes

66. Program ProClean:

Yes

67. Program ProDrain:

Yes

68. Program ProEco:

Yes

69. Program ProNew:

Yes

70. Program ProLong:

Yes

71. Program ProGlass:

Yes

72. Program ProWater:

Yes

73. Program ProActive:

Yes

74. Program ProSteel:

Yes

75. Program ProSan:

Yes